


NOTES:

1. SEAL ALL FASTENINGS INTO HULL STRUCTURE USING WHITE SILICONE SEALANT AT TIME OF INSTALLATION.
2. USE HARDWARE SET & INSTRUCTIONS SUPPLIED W/TOP AT INSTALLATION.

REVISIONS

REV.	DESCR.	BY	DATE	APPVD.	ECN NO.
A	CHANGED #04 FROM #10-24 X 1.25" PFH TO #10-24 X 1.75 POH	CSR	03/17/03	-	030329
B	2004 MODEL YEAR ENHANCEMENTS	RC	05/27/03	-	030352
C	CHANGED NUMBERING SYSTEM / APPLY ATT. BORDER	AVM	06/18/03	ZAC	030639
D	MODIFY DRAWING BORDER TO AN ATTRIBUTED BORDER	TS	02/06/06	AVM	060152

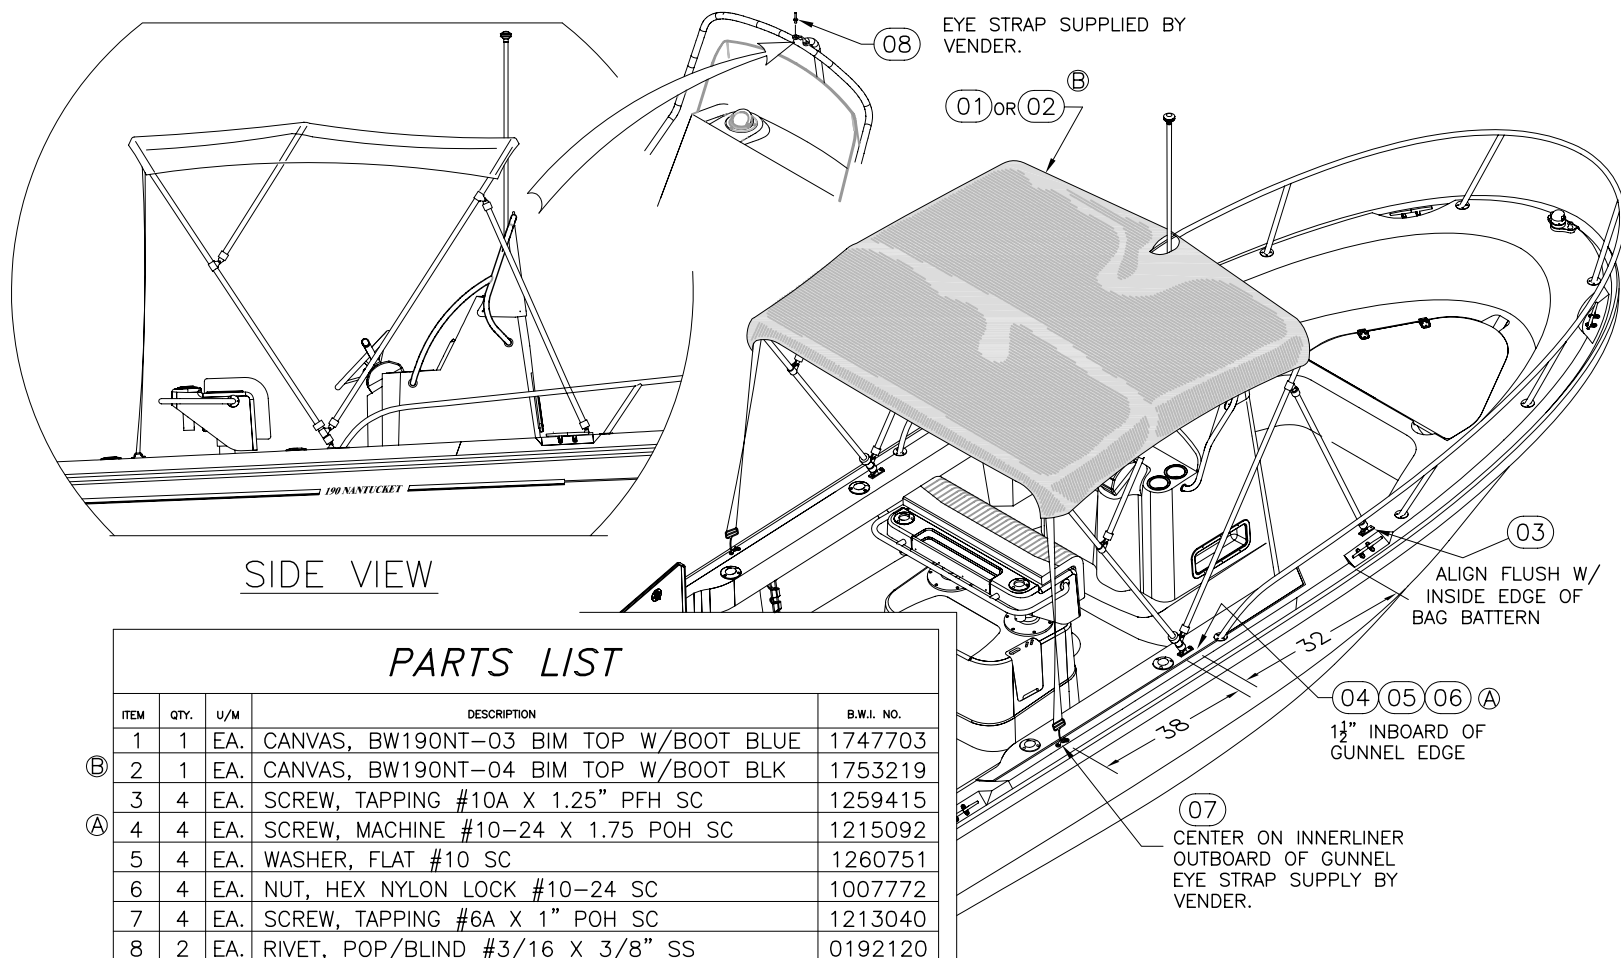

PARTS LIST

ITEM	QTY.	U/M	DESCRIPTION	B.W.I. NO.
1	1	EA.	CANVAS, BW190NT-03 BIM TOP W/BOOT BLUE	1747703
2	1	EA.	CANVAS, BW190NT-04 BIM TOP W/BOOT BLK	1753219
3	4	EA.	SCREW, TAPPING #10A X 1.25" PFH SC	1259415
4	4	EA.	SCREW, MACHINE #10-24 X 1.75 POH SC	1215092
5	4	EA.	WASHER, FLAT #10 SC	1260751
6	4	EA.	NUT, HEX NYLON LOCK #10-24 SC	1007772
7	4	EA.	SCREW, TAPPING #6A X 1" POH SC	1213040
8	2	EA.	RIVET, POP/BLIND #3/16 X 3/8" SS	0192120

OPT: 100-70515
SUN TOP W/BOOT

INTERPRET DIMENSIONS AND TOLERANCES PER ANSI Y 14.5
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
TOLERANCES: ANGLES = $\pm .5^\circ$.XXX = $\pm .010$
.X = $\pm .1$.XX = $\pm .03$ X = $\pm 1/16$
DO NOT SCALE DRAWING