



Great Lakes Boat Top Co.


Corporate Headquarters

15 Quality Circle • Vonore, Tennessee 37885
Office: (423) 884-6761 • Fax: (423) 884-6410

1997 SEA RAY

280 CC (#1)

BIMINI & CAMPER TOP MOUNTING INSTRUCTIONS

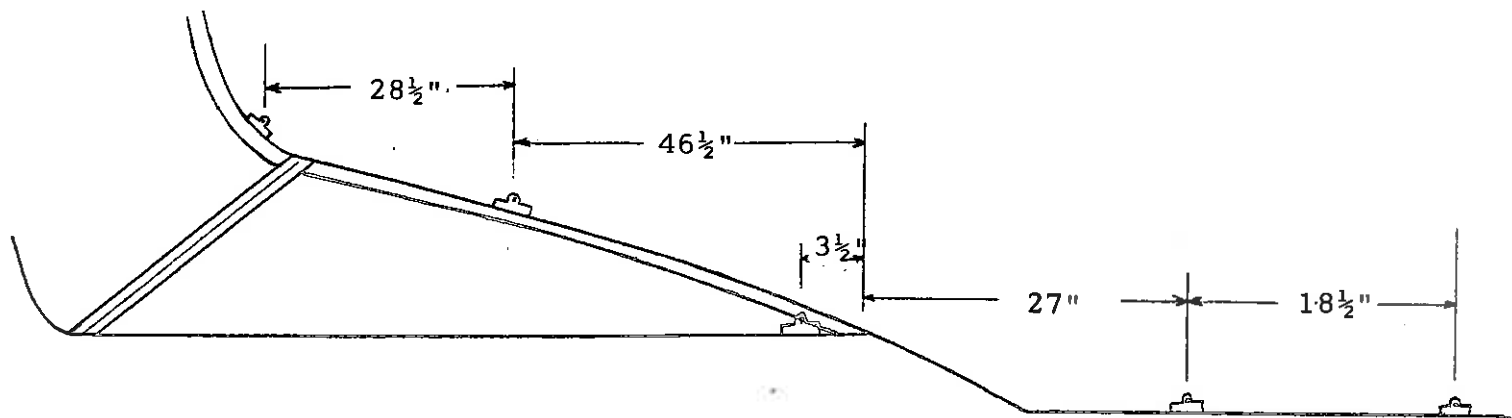

BIMINI

- 1) FROM REAR CORNER OF WINDSHIELD MEASURE FORWARD ALONG INSIDE EDGE OF FIBERGLASS 3 1/2". PLACE MOUNT ON DECK, ANGLE IN.
- 2) FROM REAR CORNER OF WINDSHIELD MEASURE FORWARD 46 1/2" TO CENTER OF RADIUS MAIN MOUNT.
- 3) FROM CENTER OF MAIN MOUNT MEASURE FORWARD 28 1/2" TO CENTER OF FRONT POLE RADIUS MOUNT.

CAMPER

- 4) FROM REAR CORNER OF WINDSHIELD MEASURE BACK 27" TO CENTER OF MAIN STRAIGHT MOUNT. PLACE MOUNT 1" OUT FROM INSIDE EDGE OF DECK.
- 5) FROM CENTER OF MAIN MOUNT MEASURE BACK 18 1/2" TO CENTER OF REAR POLE MOUNT. PLACE MOUNT 1" OUT FROM INSIDE EDGE OF DECK.

PACKAGED HARDWARE

BIMINI TOP

- 4 - S.S. RADIUS MOUNTS
- 2 - ANGLE MOUNTS
- 4 - #10 X 3/4" PHILLIPS SCREW (OVAL)
- 8 - #8 X 3/8" PHILLIPS SCREWS (TYPE B FLAT)

CAMPER TOP

- 4 - S.S. STRAIGHT MOUNTS
- 8 - #10 X 3/4" PHILLIPS SCREW (OVAL)

6/19/96