

Sport Boats Owner's Manual Supplement


MAXUM®

Engine Serial Number: _____

Hull Identification Number: _____

Hull Identification Number

- The Hull Identification Number (HIN) is located on the starboard side of the hull.
- Record the HIN (and the engine serial number) in the space provided above.
- Please refer to the HIN for any correspondence or orders.

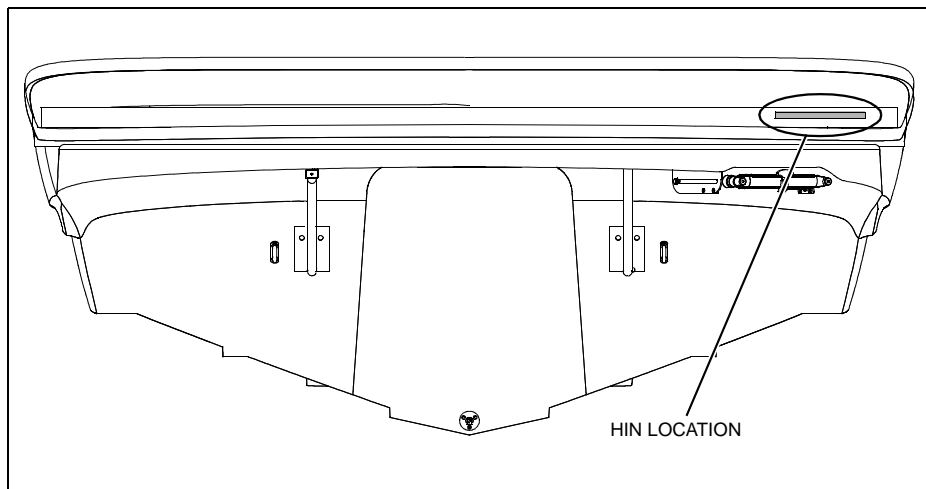

© 2004 Maxum Technical Publications. All rights reserved.

No part of this publication may be reproduced, stored in any retrieval system, or transmitted in any form by any means, electronic, mechanical, photocopying, recording or otherwise, without prior written permission of Maxum.

Printed in the United States of America.

General Notes

The material in this document is for information only and is subject to change without notice. While reasonable efforts have been made in the preparation of this document to assure its accuracy, Maxum assumes no liability resulting from errors or omissions in this document, or from the use of information contained herein. Due to our commitment to product improvement, Maxum reserves the right to make changes in the product design, specifications, and equipment at any time without notice or obligation. Illustrations and/or photos may show optional equipment.

All Maxum products meet or exceed USCG (United States Coast Guard) and/or NMMA (National Marine Manufacturer's Association) construction standards. Manufactured with 1,1,1 Trichloroethane, a substance which harms public health and environment during the manufacturing process by destroying ozone in the upper atmosphere.

Proprietary Rights

This document discloses subject matter in which Maxum has proprietary rights. The information and design disclosed herein were originated by and are the property of Maxum. Neither receipt nor possession thereof confers or transfers any right to reproduce, copy, alter or disclose the document or any part thereof, any information contained therein, or to construct boats or any item from it, except by written permission from or written agreement with Maxum. This document is to be returned upon request to Maxum.

CONTENTS

1 Chapter 1: Welcome Aboard!

- 1 Dealer Service
- 1 Warranty Information
- 1 Boating Experience
- 2 Engine & Accessories Guidelines
 - 2 Propeller
- 2 Engine & Accessories Literature
- 3 Structural Limitations
- 3 Qualified Maintenance
- 4 Safety Standards
- 4 Special Care For Moored Boats
- 5 Carbon Monoxide (CO)
 - 5 Facts about CO
 - 6 Where and How CO Can Accumulate
 - 6 How to Protect Yourself and Others From CO
 - 7 CO Checklists
 - 7 Carbon Monoxide Alarm System (If Equipped)
 - 8 More Information

9 Chapter 2: Product Specifications

- 9 1800MX
- 10 1800SR3
- 11 1900SR3
- 12 2000SR3
- 13 2100SC
- 14 2200SR3

15 Chapter 3: Locations

- 15 Exterior Views
 - 15 Hull Views
 - 16 1800MX Deck Views
 - 17 1800SR3 Deck Views
 - 18 1900SR3 Deck Views
 - 19 2000SR3 Deck Views
 - 20 2100SC Deck Views
 - 21 2200SR3 Deck View
 - 22 Helm Views
- 24 Component Locations

36 Chapter 4: Propulsion & Related Systems

- 36 Engine
 - 36 Special Starting Instructions for Carbureted Engines (If Equipped)
- 37 Bilge Blower System
- 38 Fuel System
 - 39 Fuel Fill & Vent
 - 39 Anti-siphon Valve (Gas Engine Only)
 - 40 Gas Engine Fuel Filters
 - 40 Fuel Filter/Water Separator (Diesel Engine Only)
- 41 Quick Oil Drain System
- 42 Fire Suppression System (If Equipped)

43 Chapter 5: Controls & Gauges

- 43 Steering
 - 43 Rack-and-Pinion Steering System
- 43 Shift/Throttle Control
- 43 Power Trim and Tilt
- 44 Gauges
 - 44 Cleaning Gauges
 - 44 Gauge Fogging
 - 44 Radio Transmission Interference
- 44 Depth Finder (If Equipped)

45 Chapter 6: Plumbing

- 45 Bilge Pump
 - 46 Bilge Pump Testing
- 48 Freshwater System (2200SR Only)
 - 49 Freshwater System Winterization
 - 49 Transom Shower (2200SR Only)
- 50 Drain Systems
 - 50 Deck Drains
- 50 Portable Toilet (2100SC Only) (If Equipped)
- 50 Portable Toilet Pump-Out (2100SC Only) (If Equipped)

51 Chapter 7: Deck Equipment

- 51 Cleats and Tow Eyes
- 51 Ski Tow Ring
- 52 Ski-Tow Tower (If Equipped)
 - 52 *Attaching the Ski-Tow Rope*
 - 53 *Folding The Ski-Tow Tower*
- 54 Canvas
 - 55 *Bow Well Cover (Bowriders Only) (If Equipped)*
 - 56 *1800MX Convertible Top (If Equipped)*
 - 57 *1800SR3, 1900SR3, & 2000SR3 Convertible Top (If Equipped)*
 - 58 *2100SC & 2200SR3 Convertible Top (If Equipped)*
 - 59 *Side Curtains (If Equipped)*
 - 60 *1800MX Bimini Top (If Equipped)*
 - 60 *1800SR3 Bimini Top (If Equipped)*
 - 61 *2100SC Bimini Top (If Equipped)*
 - 61 *1900SR3, 2000SR3, & 2200SR3 Bimini Top (If Equipped)*
 - 62 *Canvas Care*
 - 63 *Clear Vinyl Care*

64 Chapter 8: Entertainment Systems

- 64 Audio System

65 Chapter 9: Convertible Seats, Beds, & Tables

- 65 Sleeper Seats (If Equipped)
 - 65 *Type 'A' Sleeper Seats (If Equipped)*
 - 66 *Type 'B' Sleeper Seats (If Equipped)*
- 67 Cuddy Cabin to V-Berth Conversion (2100SC Only)
- 69 Jump Seat to Sunlounge Conversion (If Equipped)
- 70 Engine Cover to Sunlounge Conversion (If Equipped)

71 Chapter 10: Lights

- 71 Care and Maintenance
- 71 Interior & Exterior Lights
- 71 Navigation Lights

72 Chapter 11: Electrical System

- 73 12-Volt DC System
 - 73 *Battery*
 - 73 *Battery Switch (If Equipped With Two Batteries)*
 - 73 *Battery Switch Positions*
 - 74 *Fuses*
 - 74 *12-Volt Accessory Outlet(s)*
 - 74 *Alternator*
- 75 Electrical Routings
 - 75 *1800MX Deck Electrical Harness*
 - 76 *1800SR3, 1900SR3 and 2000SR3 Deck Electrical Harness*
 - 77 *2100SC Deck Electrical Harness*
 - 78 *2200SR3 Deck Electrical Harness*
- 79 Wiring Diagrams
 - 79 *1800MX*
 - 80 *1800SR3, 1900SR3, & 2000SR3*
 - 81 *2100SC*
 - 82 *2200SR3*

83 Important Records

84 Float Plan

Hazard Boxes & Symbols


The hazard boxes and symbols shown below are used throughout this *Supplement* to call attention to potentially dangerous situations which could lead to either personal injury or product damage. **Read ALL warnings carefully and follow all safety instructions.**

**DANGER!**

This box alerts you to immediate hazards which *WILL* cause severe personal injury or death if the warning is ignored.

**WARNING!**

This box alerts you to hazards or unsafe practices which *COULD* result in severe personal injury or death if the warning is ignored.

**CAUTION**

This box alerts you to hazards or unsafe practices which *COULD* result in minor personal injury or cause product or property damage if the warning is ignored.

NOTICE

This box calls attention to installation, operation or maintenance information, which is important to proper operation but is not hazard related.



Chapter 1: Welcome Aboard!

- This *Owner's Manual Supplement* provides information about your boat that is **not** covered in the *Sport Boat Owner's Manual*.
- **Before** using your boat, study this *Owner's Manual Supplement*, the *Sport Boat Owner's Manual*, and **all** engine and accessory literature carefully.
- Keep this *Owner's Manual Supplement* and the *Sport Boat Owner's Manual* on your boat in a secure, yet readily available place.


Dealer Service

- Your dealer is your key to service.
- Ask your dealer to explain **all** systems **before** taking delivery of your boat.
- Contact your dealer if you have any problems with your new boat.
- If your dealer cannot help, call our customer service hotline: 360-435-8957 or send us a FAX: 360-403-4235.
- Buy replacement parts from any authorized Maxum dealer.

Warranty Information

- Maxum offers a Limited Warranty on each new Maxum purchased through an authorized Maxum dealer.
- A copy of the Limited Warranty was included in your owner's packet.
- If you did not receive a copy of the Limited Warranty, please contact your Maxum dealer or call 360-435-8957 for a copy.

Boating Experience

 **WARNING!**

CONTROL HAZARD!

A qualified operator **must** be in control of the boat at **all** times. Do **NOT** operate your boat while under the influence of alcohol or drugs.

If this is your first boat or if you are changing to a type of boat you are **not** familiar with, for your own comfort and safety, obtain handling and operating experience **before** assuming command of this boat.

Take one of the boating safety classes offered by the U.S. Power Squadrons or the U.S. Coast Guard Auxiliary. For more course information, including dates and locations of upcoming classes, contact the organizations directly:

- U.S. Power Squadrons: 1-888-FOR-USPS (1-888-367-8777) or on the Internet at: <http://www.usps.org>
- In Canada, for the CPS courses call 1-888-CPS-BOAT.
- U.S. Coast Guard Auxiliary: 1-800-368-5647 or on the Internet at: <http://www.cgaux.org>

Outside the United States, your selling dealer, national sailing federation or local boat club can advise you of local sea schools or competent instructors.

Engine & Accessories Guidelines

NOTICE

When storing your boat please refer to your engine's operation and maintenance manuals.

- Your boat's engine and accessories were selected to provide optimum performance and service.
- Installing a different engine or other accessories may cause unwanted handling characteristics.
- Should you choose to install a different engine or to add accessories that will affect the boat's running trim, have an experienced marine technician perform a safety inspection and handling test *before* operating your boat again.

Certain modifications to your boat *will* result in cancellation of your warranty protection.

- *Always* check with your dealer *before* making any modifications to your boat.

Propeller



CAUTION

ENGINE DAMAGE HAZARD!

The factory standard propeller may not be the best for your particular boat and load conditions. Refer to the engine manual for engine RPM ratings. The engine should reach, but **NOT** exceed its full rated RPM when full-throttle is applied.

Immediately contact your local Maxum dealer if:

- The engine cannot reach its full rated RPM when full-throttle is applied, or;
- The engine exceeds its full rated RPM when full-throttle is applied.

- Keep the propeller in good repair and at the correct pitch for your particular situation.
- A slightly bent or nicked propeller will adversely affect the performance of your boat.

Engine & Accessories Literature

- The engine and accessories installed on your boat come with their own operation and maintenance manuals.
- Read these manuals *before* using the engine and accessories.
- Unless noted otherwise, *all* engine and accessory literature referred to in this *Supplement* is included in your owner's packet.

Structural Limitations

The extended swim platform is designed to be lightweight for proper boat balance. The load limit for the extended swim step is 30 pounds per square foot, evenly distributed.

Qualified Maintenance





WARNING!



To maintain the integrity and safety of your boat, allow only qualified personnel to perform maintenance on, or in any way modify the:

- Steering System
- Propulsion System
- Engine Control System
- Fuel System
- Environmental Control System
- Electrical System
- Navigational System

- Failure to maintain your boat's systems (listed in the warning above) as designed could violate the laws in your jurisdiction and could expose you and other people to the danger of bodily injury or accidental death.
- Follow the instructions provided in the *Sport Boat Owner's Manual*, this *Supplement*, the engine owner's manual and *all* accessory literature.

Safety Standards

 DANGER!	
	<p><i>FALLING and ROTATING PROPELLER HAZARD!</i></p> <ul style="list-style-type: none"> • NEVER allow anyone to ride on parts of the boat NOT designed for such use. • Sitting on seat backs, lounging on the forward deck, bow riding, gunwale riding or occupying the transom platform while underway is especially hazardous and will cause personal injury or death.

 DANGER!	
	<p><i>ROTATING PROPELLER and CARBON MONOXIDE POISONING HAZARD!</i></p> <ul style="list-style-type: none"> • NEVER allow anyone to occupy, or hang from, the back deck or swim platform while the engine(s) are running. • Teak surfing, dragging, or water skiing within 20 feet of a moving watercraft can be fatal.

 DANGER!	
<p><i>PERSONAL SAFETY HAZARD!</i></p> <p><i>ALWAYS</i> secure the anchor and other loose objects <i>before</i> getting underway. The anchor and other items that are NOT properly secured can come loose when the boat is moving and cause personal injury or death.</p>	

- Your boat's mechanical and electrical systems were designed to meet safety standards in effect at the time it was built.
- Some of these standards were mandated by law, all of them were designed to insure your safety, and the safety of other people, vessels and property.


In addition to this *Supplement*, please read the *Sport Boat Owner's Manual* and **all** accessory instructions for important safety standards and hazard information.


Special Care For Moored Boats

NOTICE
<ul style="list-style-type: none"> • To help seal the hull bottom and reduce the possibility of gelcoat blistering on moored boats, apply an epoxy barrier coating. • The barrier coating should be covered with several coats of anti-fouling paint. • Many states regulate the chemical content of bottom paints in order to meet environmental standards. Check with your local dealer about recommended bottom paints, and about the laws in effect in your area.

- Whether moored in saltwater or freshwater, your boat will collect marine growth on its hull bottom.
- This will detract from the boat's beauty, greatly affect its performance and may damage the gelcoat.
- Periodically haul the boat out of the water and scrub the hull bottom with a bristle brush and a solution of soap and water.

Carbon Monoxide (CO)

**DANGER!**



- Carbon monoxide gas (CO) is colorless, odorless, tasteless, and extremely dangerous.
- *All* engines, generators, and fuel burning appliances produce CO as exhaust.
- Prolonged exposure to low concentrations or very quick exposure to high concentrations *will* cause *BRAIN DAMAGE* or *DEATH*.
- Teak surfing, dragging, or water skiing within 20 feet of a moving watercraft can be fatal.

Facts about CO



- CO poisoning causes a significant number of boating deaths each year.
- Called the "silent killer", CO is an extremely toxic, colorless, odorless and tasteless gas.
- CO can harm or even kill you inside or outside your boat.
- CO can affect you whether you're underway, moored, or anchored.
- CO symptoms are similar to seasickness or alcohol intoxication.
- CO can make you sick in seconds. In high enough concentrations, even a few breaths can be fatal.
- Breathing CO blocks the ability of your blood to carry oxygen.
- The effects are cumulative, even low levels of exposure can result in injury or death.

Factors That Increase the Effects of CO Poisoning

- Age
- Smokers or people exposed to high concentrations of cigarette smoke
- Consumption of alcohol
- Lung disorders
- Heart problems
- Pregnancy

Where and How CO Can Accumulate



Stationary Conditions That Increase CO Accumulations Include:

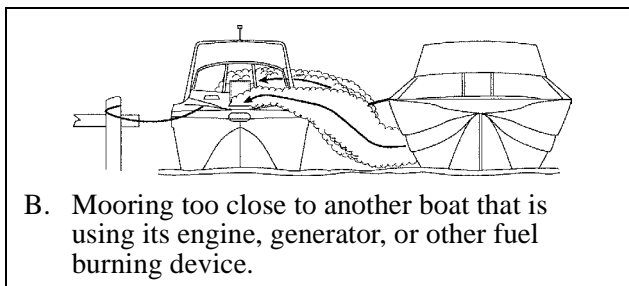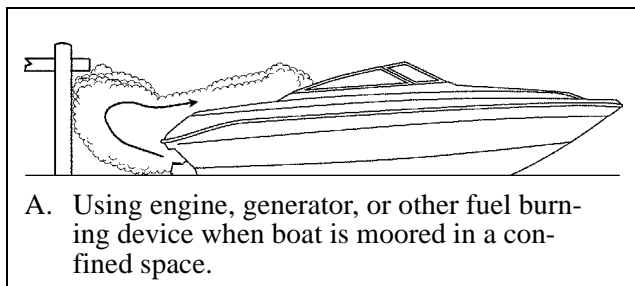

To correct stationary situations A and/or B:

- **Close all** windows, portlights and hatches.
- If possible, move your boat away from source of CO.

Running Conditions That Increase CO Accumulations Include:

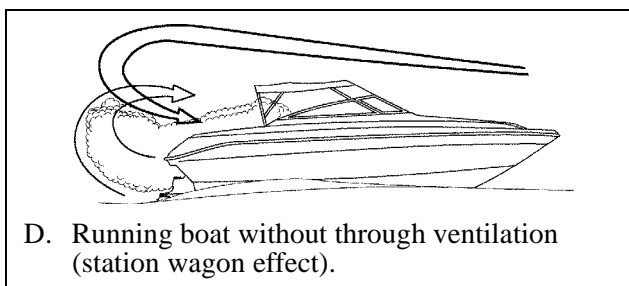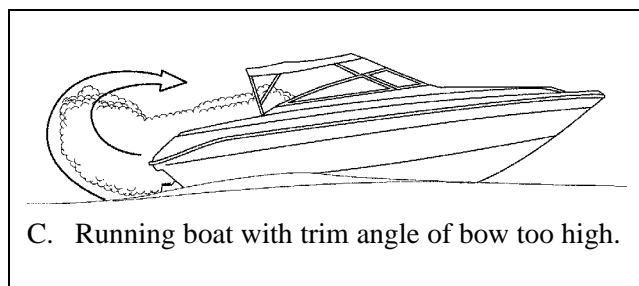

To correct running situations C and/or D:

- Trim bow down.
- **Open** windows and canvas.
- When possible, run boat so that prevailing winds help dissipate exhaust.

How to Protect Yourself and Others From CO

- Know where and how CO may accumulate in and around your boat (see above).
- Maintain fresh air circulation throughout the boat at **all** times.
- Know where your engine and generator exhaust outlets are located and keep everyone away from these areas.
- **Never** sit on, or hang onto, the back deck or swim platform while the engine(s) are running.
- **Never** enter the areas under swim platforms where exhaust outlets are located.
- Although CO can be present without the smell of exhaust fumes, if exhaust fumes are detected on the boat, take **immediate** action to dissipate these fumes.
- Treat symptoms of seasickness as possible CO poisoning. Get the person into fresh air **immediately**. Seek medical attention—unless you're sure it's not CO.
- Install and maintain CO monitors inside your boat. Do **not** ignore any alarm. Replace monitors as recommended by the monitor manufacturer.
- Follow the checklists provided on the next page.
- Get a Vessel Safety Check.

For information on how to get a free VESSEL SAFETY CHECK, visit www.vesselsafetycheck.org or contact your local U.S. Coast Guard Auxiliary or United States Power Squadrons®.

- U.S. Coast Guard Auxiliary: 1-800-368-5647 or on the Internet at: <http://www.cgaux.org>
- U.S. Power Squadrons: 1-888-FOR-USPS (1-888-367-8777) or on the Internet at: <http://www.usps.org>

CO Checklists

Trip Checklist

- ☐ Make sure you know where the exhaust outlets are located on your boat.
- ☐ Educate *all* passengers about the symptoms of CO poisoning and where CO may accumulate.
- ☐ When docked, or rafted with another boat, be aware of exhaust emissions from the other boat.
- ☐ Listen for any change in exhaust sound, which could indicate an exhaust component failure.
- ☐ Test the operation of each CO alarm by pressing the test button.

Monthly Checklist

- ☐ Make sure *all* exhaust clamps are in place and secure.
- ☐ Look for exhaust leaking from exhaust system components. Signs include rust and/or black streaking, water leaks, or corroded or cracked fittings.
- ☐ Inspect rubber exhaust hoses for burned, cracked, or deteriorated sections. *All* rubber hoses should be pliable and free of kinks.

Annual Checklist

Have a Qualified Marine Technician:

- ☐ Replace exhaust hoses if cracking, charring, or deterioration is found.
- ☐ Ensure that your engines and generators are properly tuned, and well maintained.
- ☐ Inspect each water pump impeller and the water pump housing. Replace if worn. Make sure cooling systems are in working condition.
- ☐ Inspect *all* metallic exhaust components for cracking, rusting, leaking, or loosening. Make sure they check the cylinder head gasket, exhaust manifold, water injection elbow, and the threaded adapter nipple between the manifold and the elbow.
- ☐ Clean, inspect, and confirm proper operation of the generator cooling water anti-siphon valve (if equipped).

Carbon Monoxide Alarm System (If Equipped)

NOTICE

The stereo memory and CO monitor place a small, but constant drain on the battery.

- Do *not* disconnect the CO monitor.
- Read the manufacturer's instructions for your CO monitor. **If you did not receive the manufacturer's instructions, call (800) 383-0269 and one will be mailed to you.**

If your boat is *not* equipped with a CO monitor, consider purchasing one from your dealer or marine supply store.

More Information

For more information about how you can prevent carbon monoxide poisoning on recreational boats and other ways to boat more safely, contact:

United States Coast Guard

Office of Boating Safety (G-OPB-3)

2100 Second Street SW

Washington, DC 20593

www.uscgboating.org

1-800-368-5647

National Marine Manufacturers
Association (NMMA)

200 East Randolph Drive

Suite 5100

Chicago, IL 60601-9301

www.nmma.org

312-946-6200

American Boat & Yacht Council, Inc.
(ABYC)

3069 Solomon's Island Road

Edgewater, MD 21037-1416

www.abycinc.org

410-956-1050


For information on how to get a free VESSEL SAFETY CHECK, visit www.vesselsafetycheck.org or contact your local U.S. Coast Guard Auxiliary or United States Power Squadrons®.

- U.S. Coast Guard Auxiliary: 1-800-368-5647 or on the Internet at: <http://www.cgaux.org>
- U.S. Power Squadrons: 1-888-FOR-USPS (1-888-367-8777) or on the Internet at: <http://www.usps.org>

Chapter 2: Product Specifications

1800MX


STANDARD SEATING LAYOUT

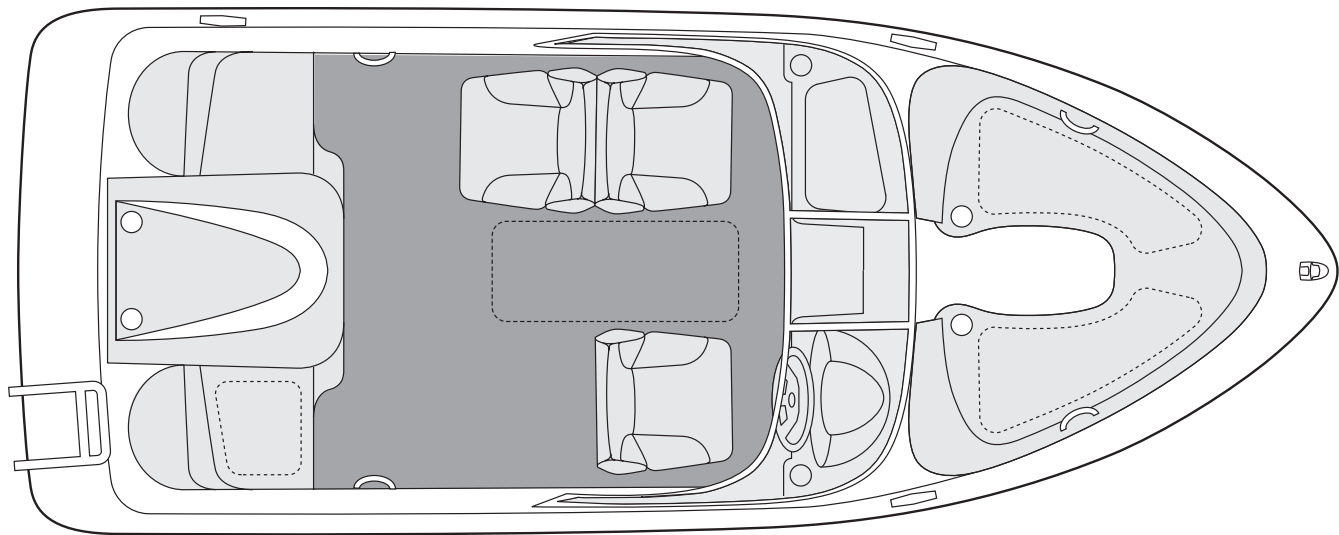


Overall Length	Bridge Clearance	Beam	Draft (Drive Up)	Draft (Drive Down)	Fuel Capacity
17' 7"	5' 8"	7' 0"	1' 6"	2' 11"	21 Gallons

1800SR3

STANDARD SEATING LAYOUT

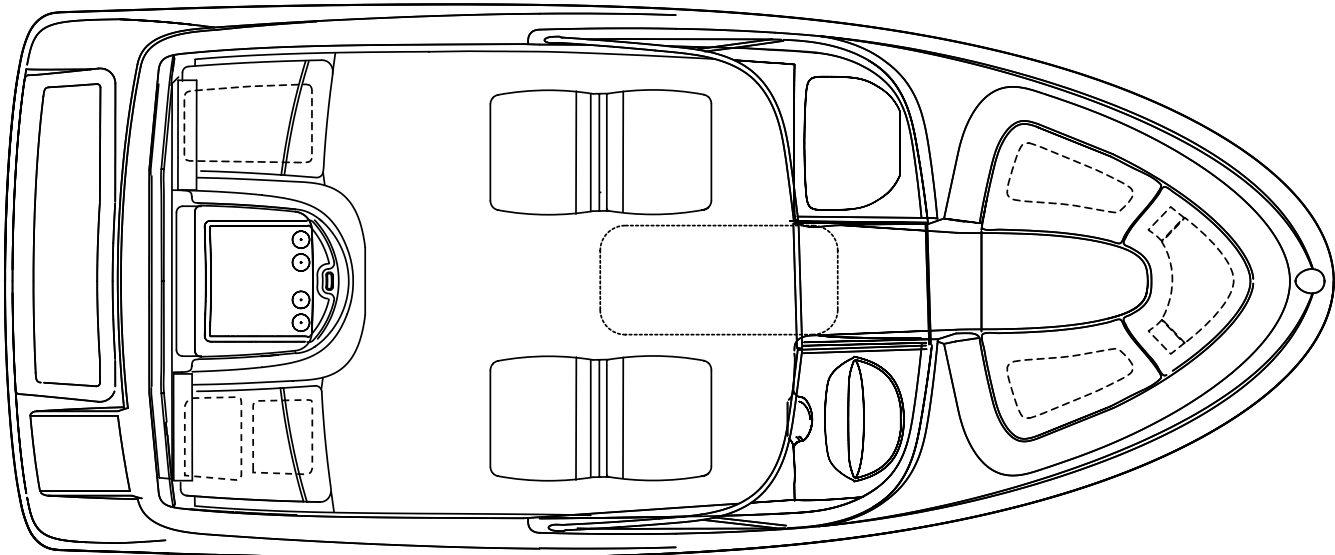

SPORT SEATING LAYOUT

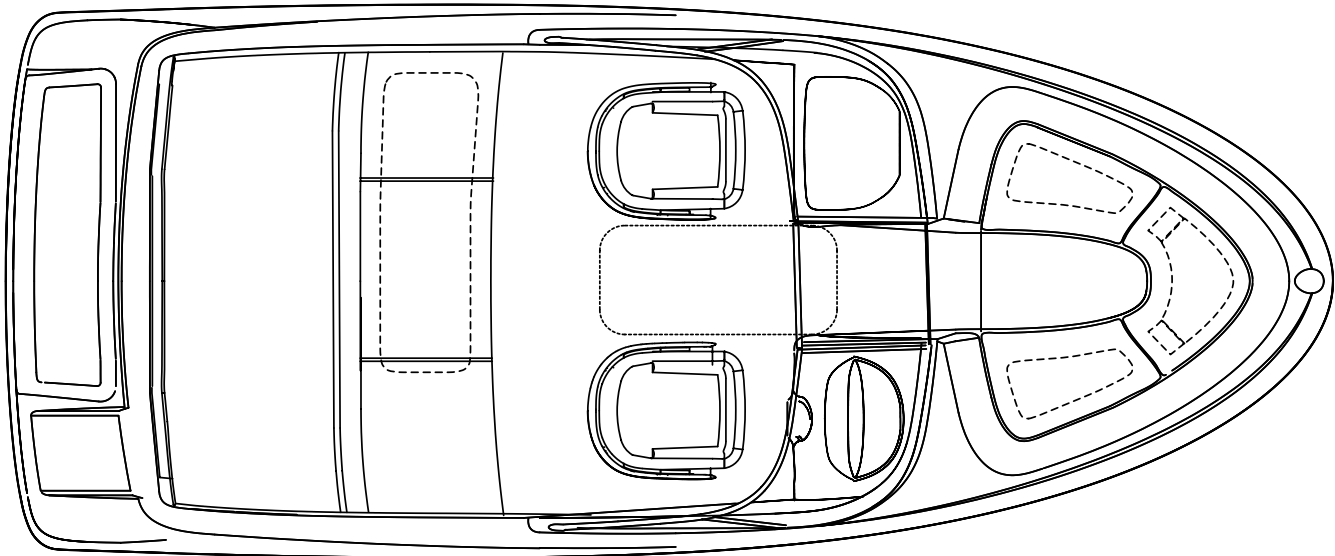


Overall Length	Bridge Clearance	Beam	Draft (Drive Up)	Draft (Drive Down)	Fuel Capacity
18' 0"	6' 7"	7' 7"	1' 9"	3' 1"	28 Gallons


NOTE: HELM BUCKET SEAT/PASSENGER SLEEPER SEAT LAYOUT NOT SHOWN

1900SR3

STANDARD SEATING LAYOUT

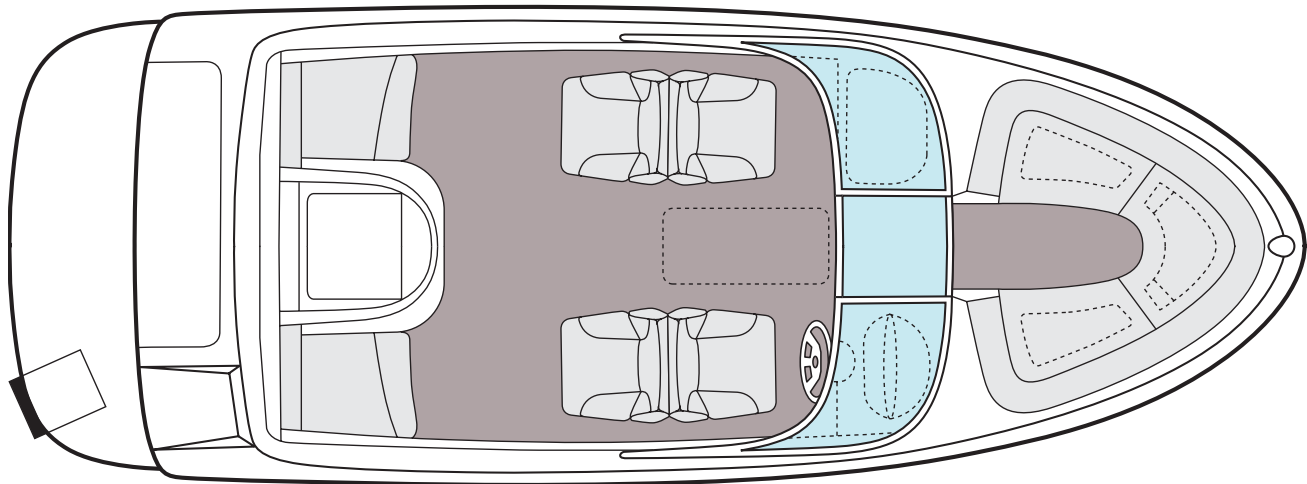

SPORT SEATING LAYOUT

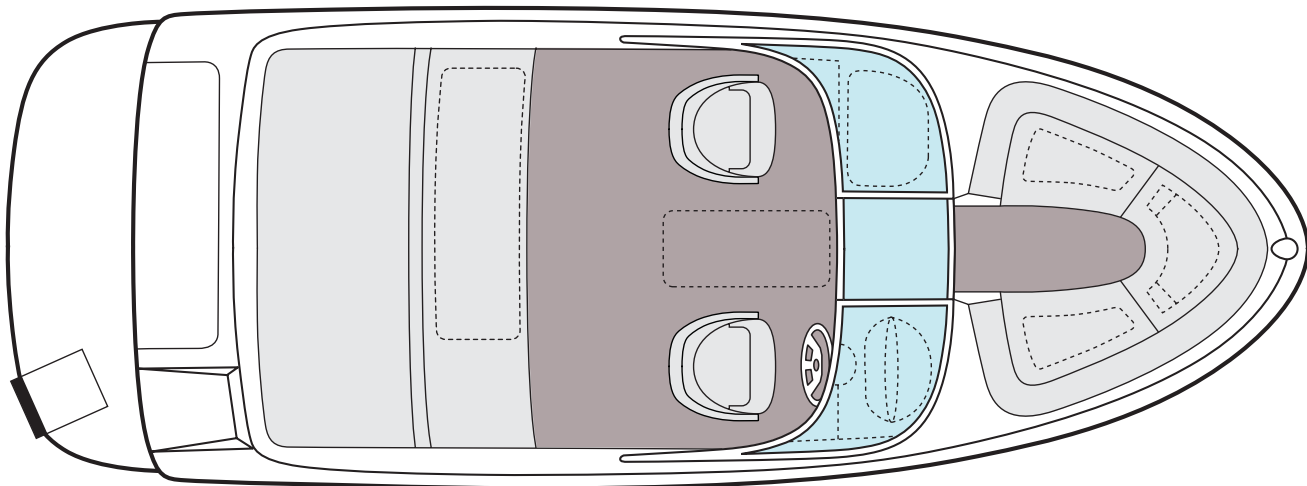


Overall Length	Bridge Clearance	Beam	Draft (Drive Up)	Draft (Drive Down)	Fuel Capacity
19' 0"	7' 0"	7' 11"	1' 9"	3' 3"	35 Gallons


NOTE: HELM BUCKET SEAT/PASSENGER SLEEPER SEAT LAYOUT NOT SHOWN

2000SR3

STANDARD SEATING LAYOUT

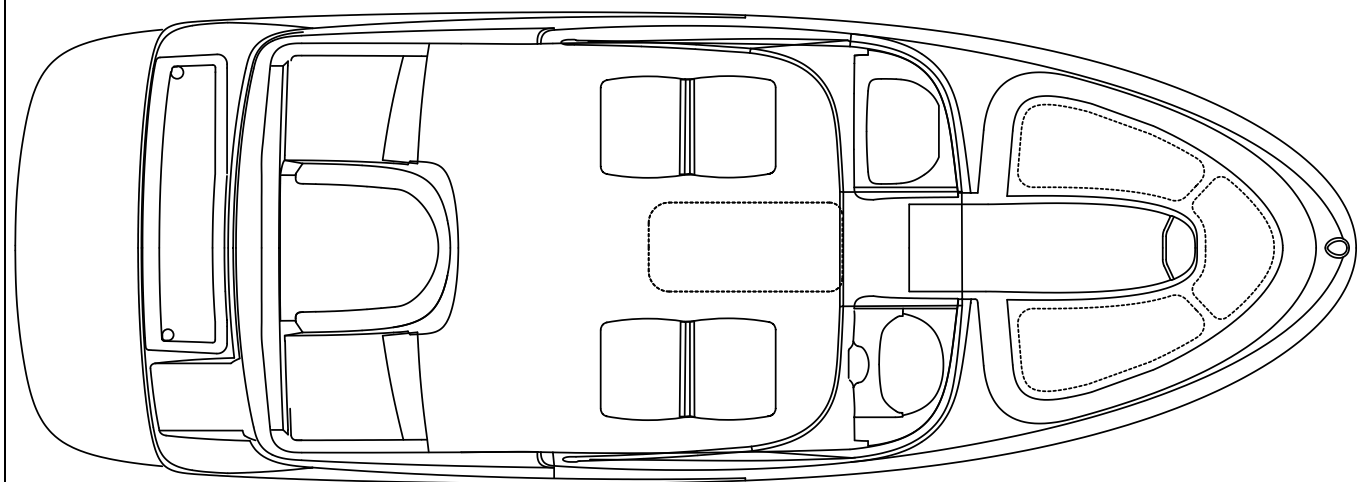

SPORT SEATING LAYOUT

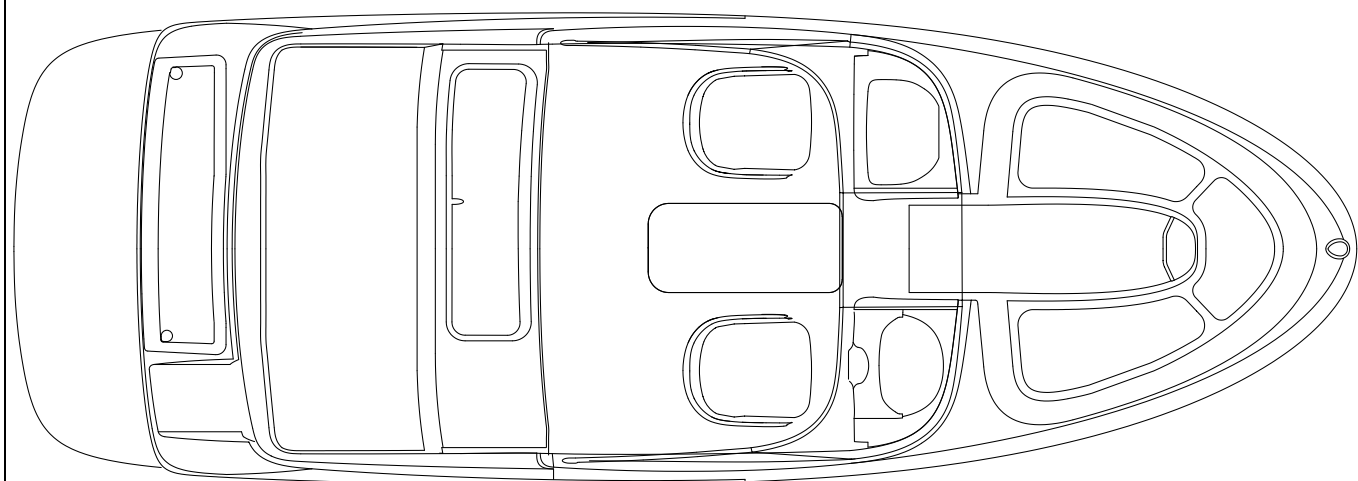


Overall Length	Bridge Clearance	Beam	Draft (Drive Up)	Draft (Drive Down)	Fuel Capacity
20' 4"	6' 7"	8' 0"	1' 8"	3' 1"	35 Gallons


NOTE: HELM BUCKET SEAT/PASSENGER SLEEPER SEAT LAYOUT NOT SHOWN

2100SC

STANDARD SEATING LAYOUT

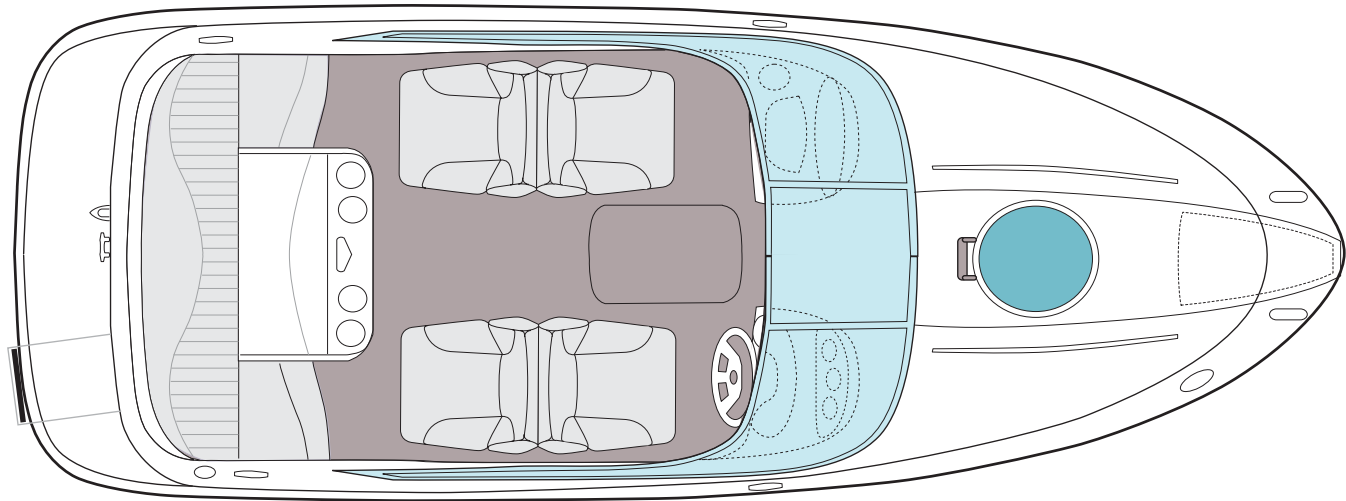

SPORT SEATING LAYOUT

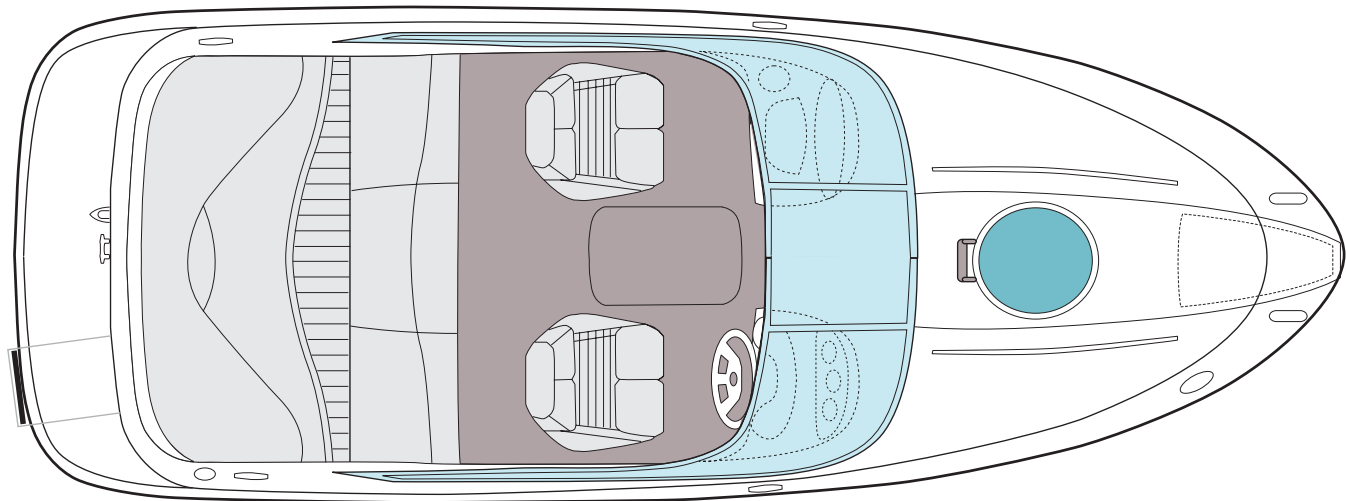


Overall Length	Bridge Clearance	Beam	Draft (Drive Up)	Draft (Drive Down)	Fuel Capacity
21' 6"	4' 10"	8' 6"	1' 5"	2' 9"	50 Gallons


NOTE: HELM BUCKET SEAT/PASSENGER SLEEPER SEAT LAYOUT NOT SHOWN

2200SR3

STANDARD SEATING LAYOUT

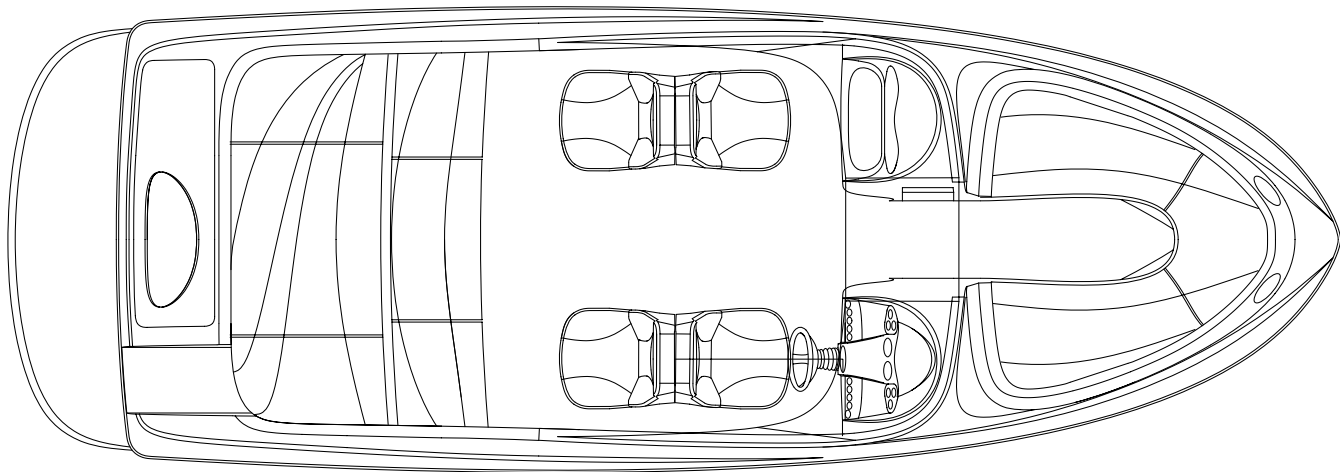

SPORT SEATING LAYOUT

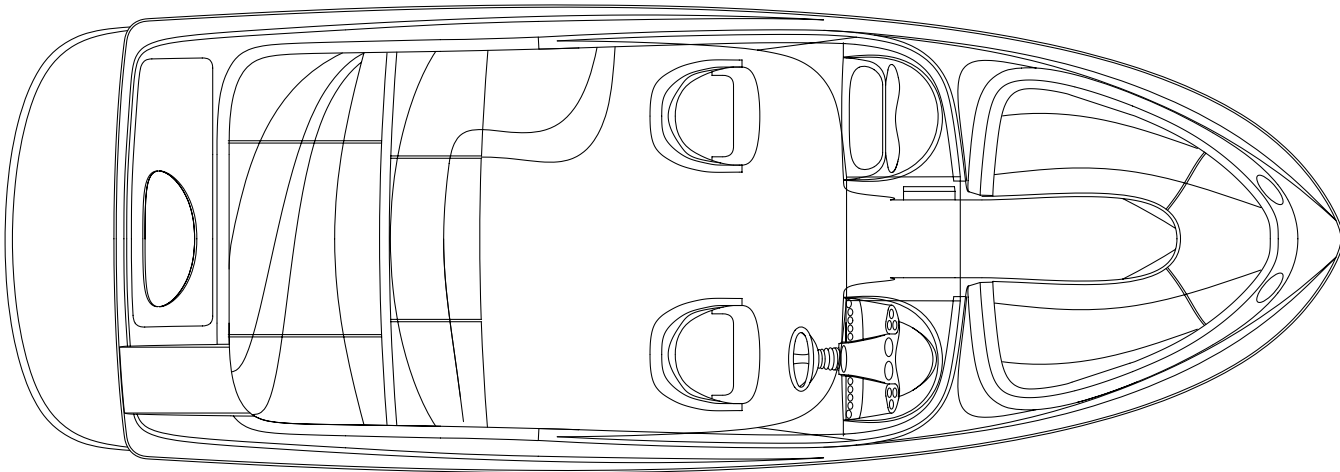


Overall Length	Bridge Clearance	Beam	Draft (Drive Up)	Draft (Drive Down)	Fuel Capacity	Freshwater Capacity
22' 1"	7' 0"	8' 6"	1' 8"	3' 2"	50 Gallons	10 Gallons

NOTE: HELM BUCKET SEAT/PASSENGER SLEEPER SEAT LAYOUT NOT SHOWN


Chapter 3: Locations



Exterior Views

Hull Views

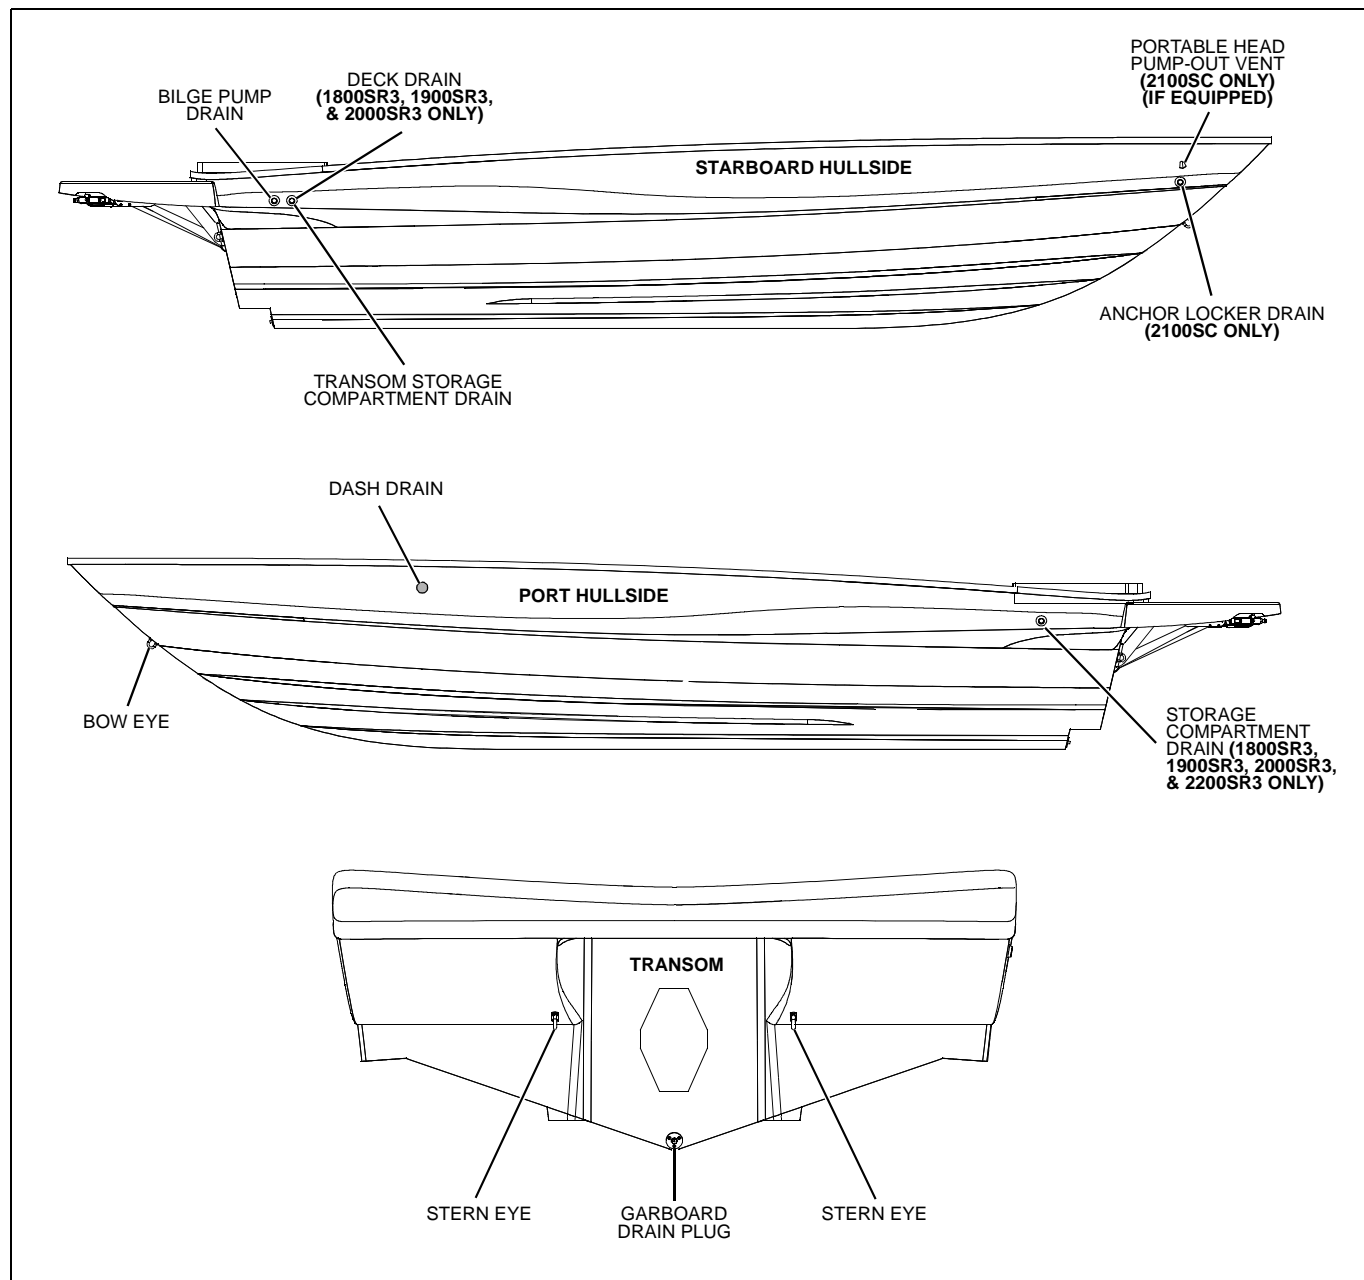



1800MX Deck Views

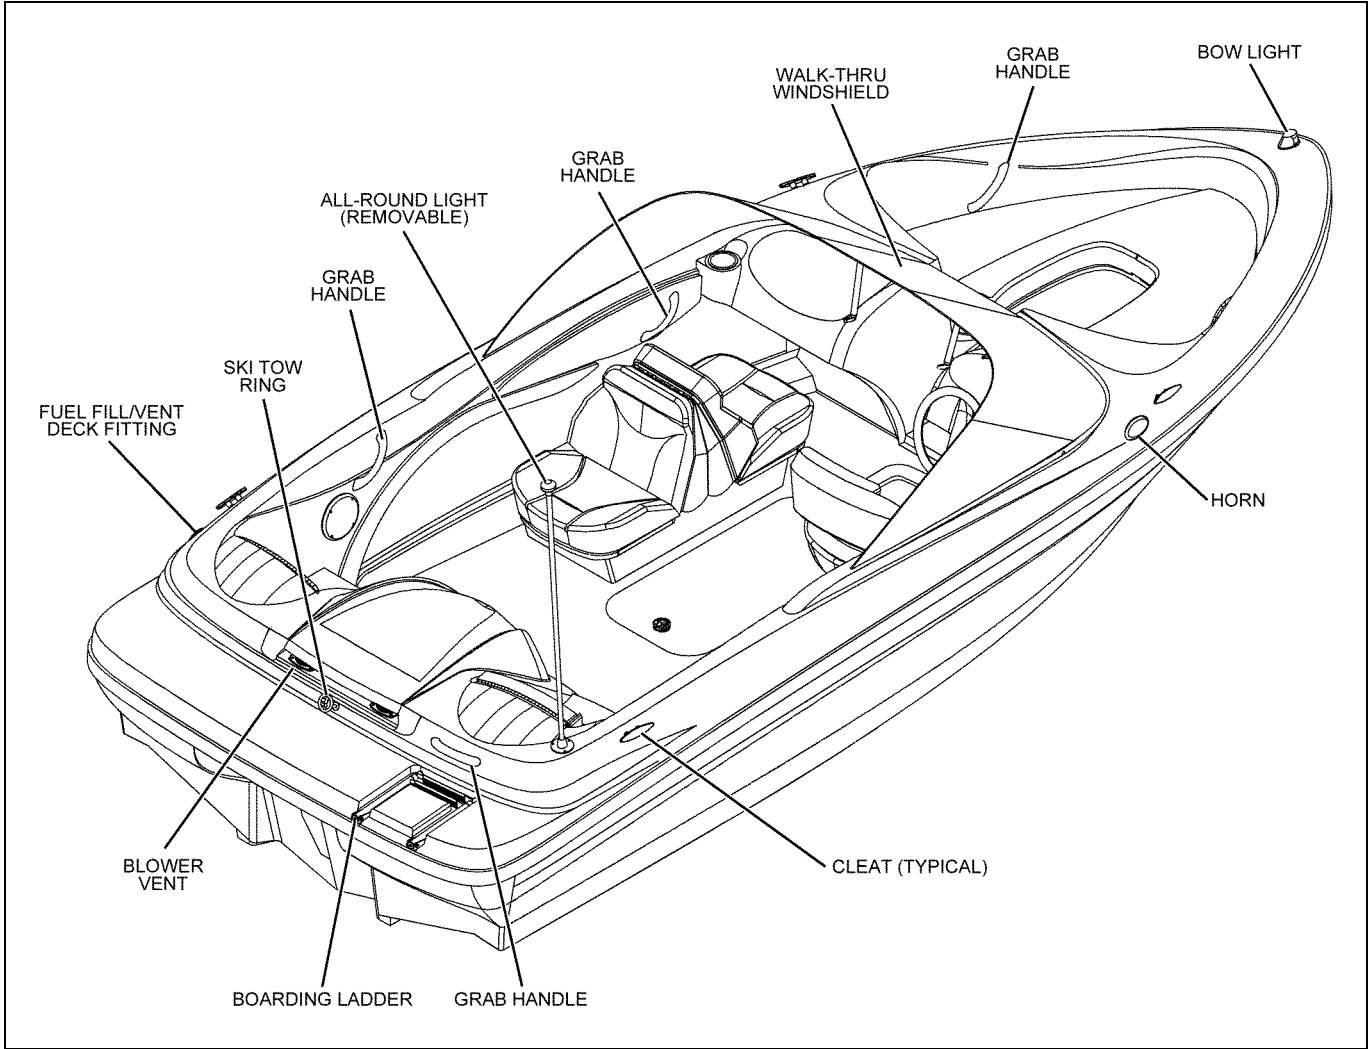

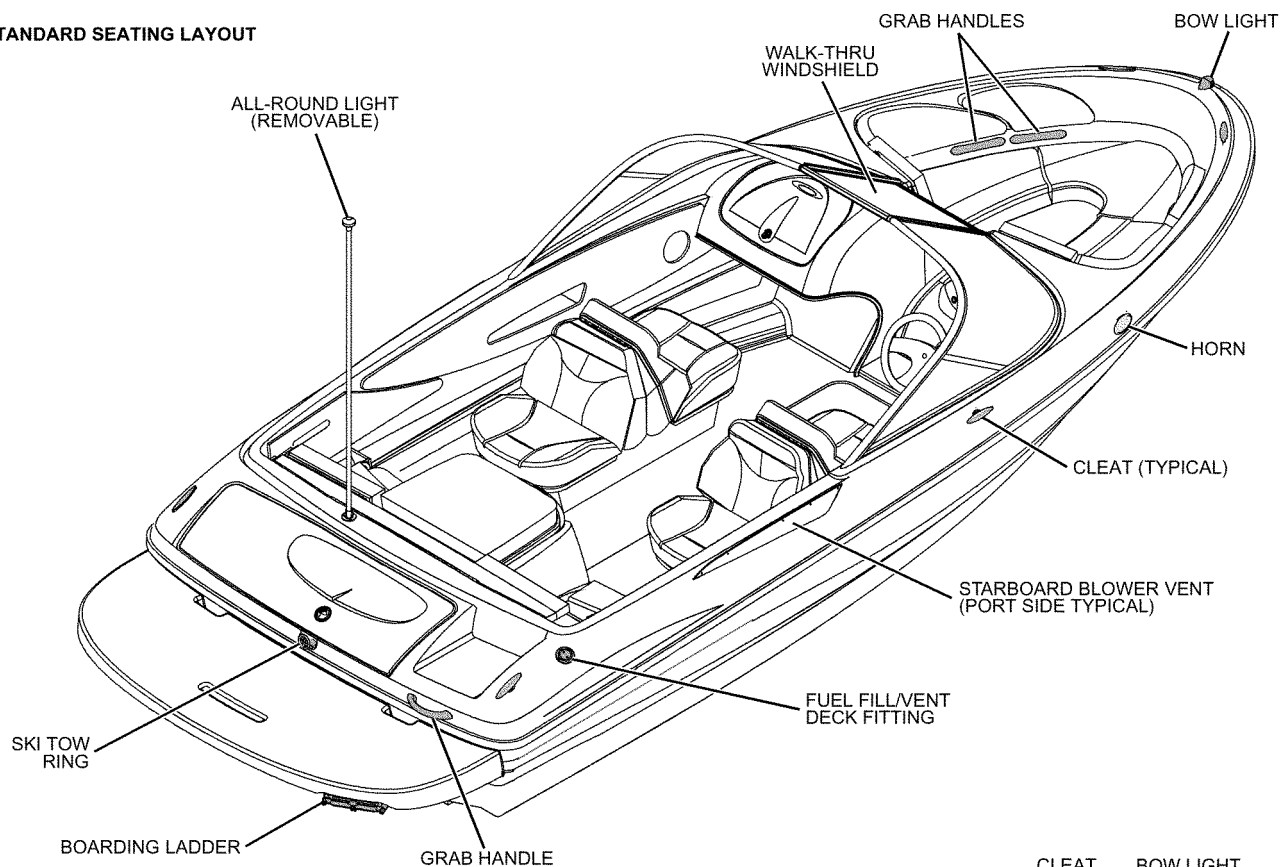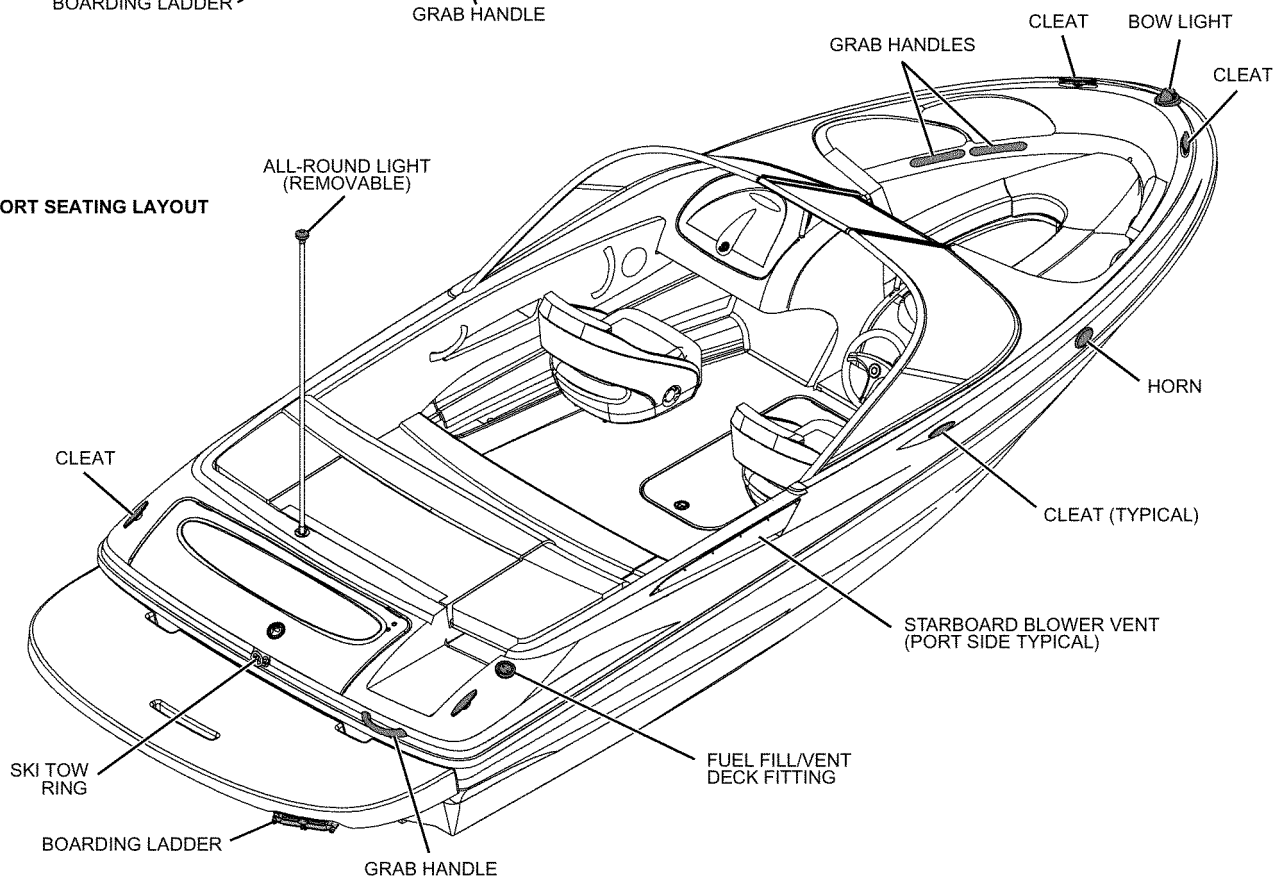
1800SR3 Deck Views**STANDARD SEATING LAYOUT****SPORT SEATING LAYOUT**



1900SR3 Deck Views

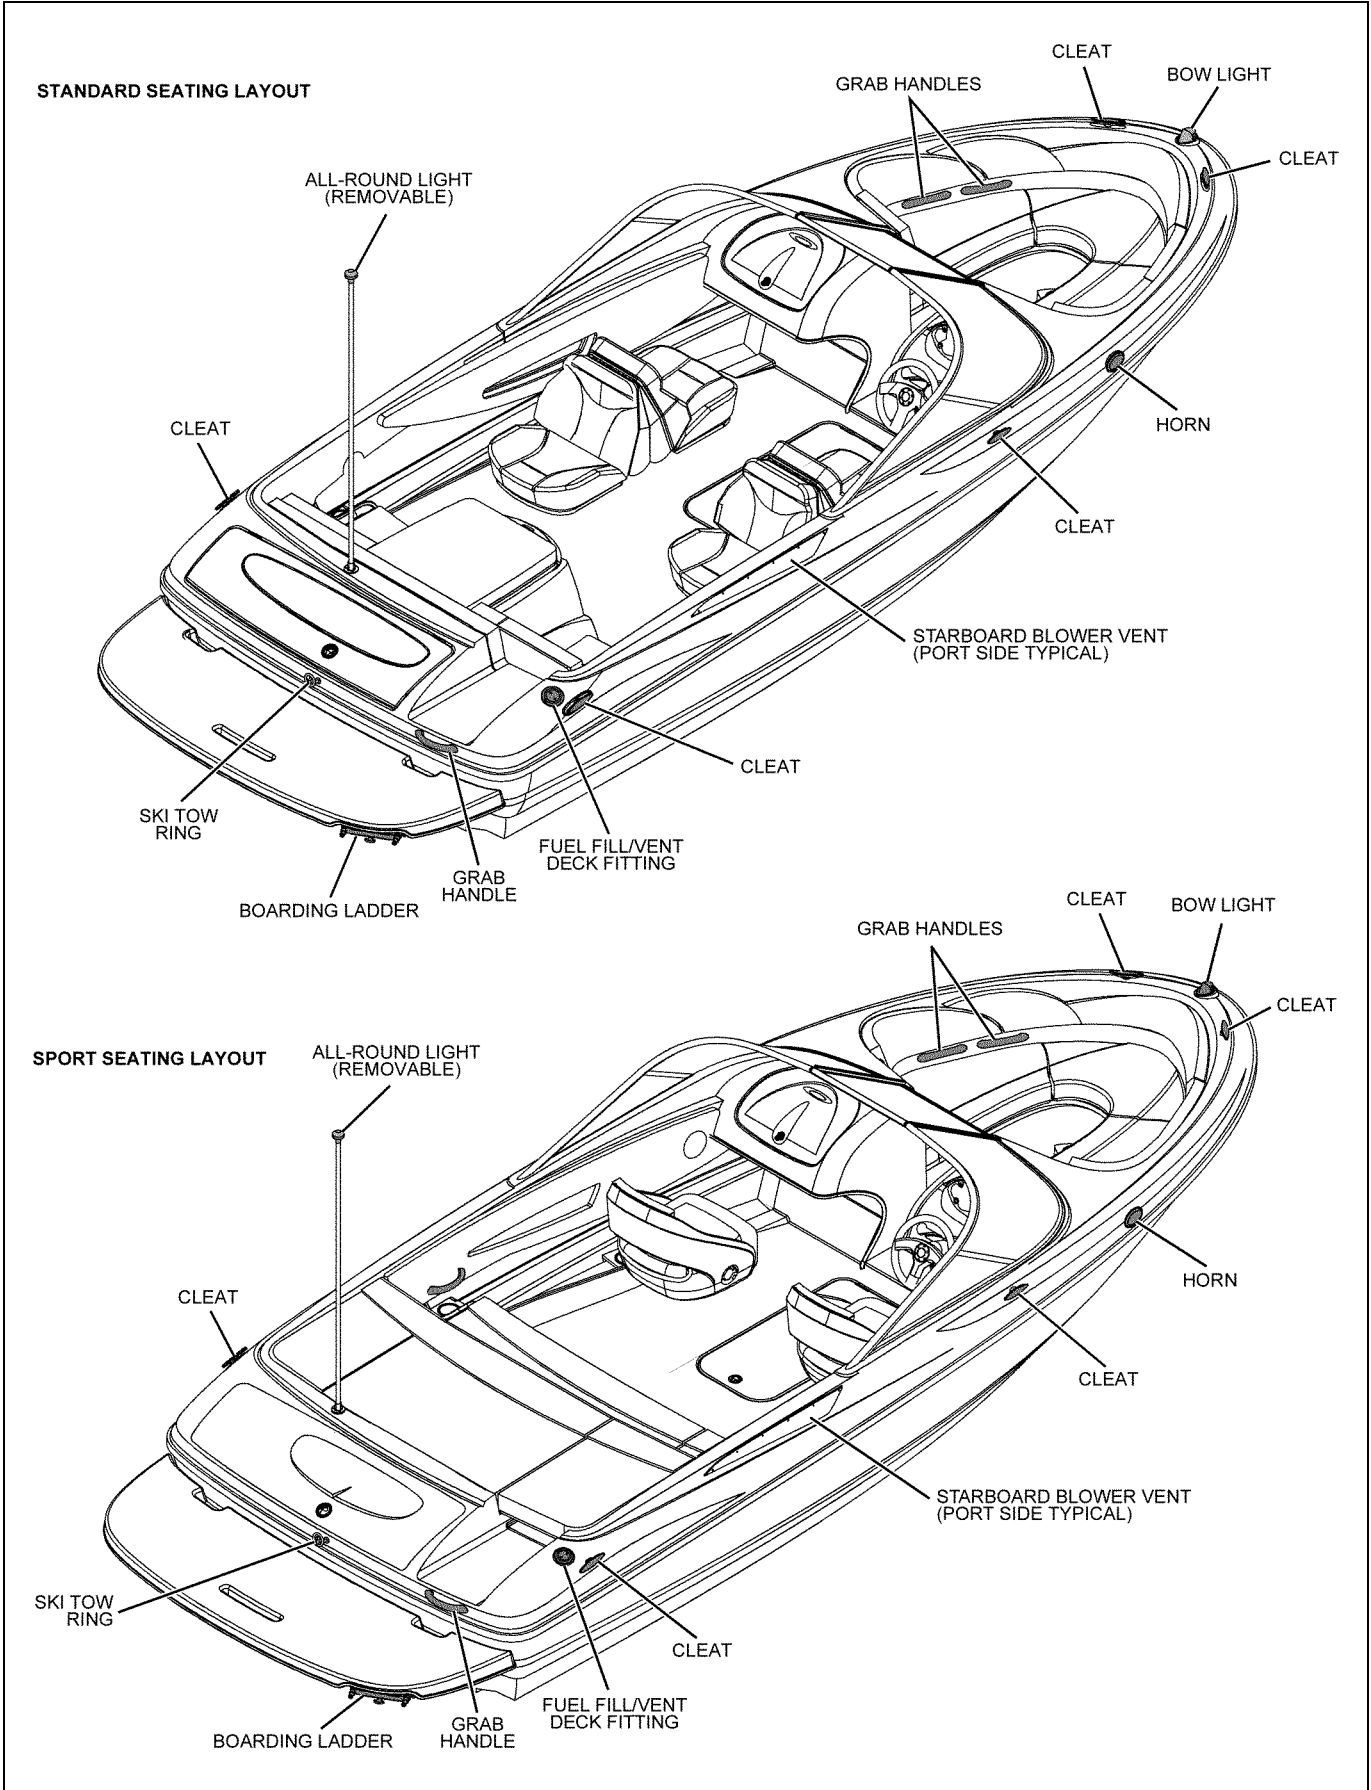

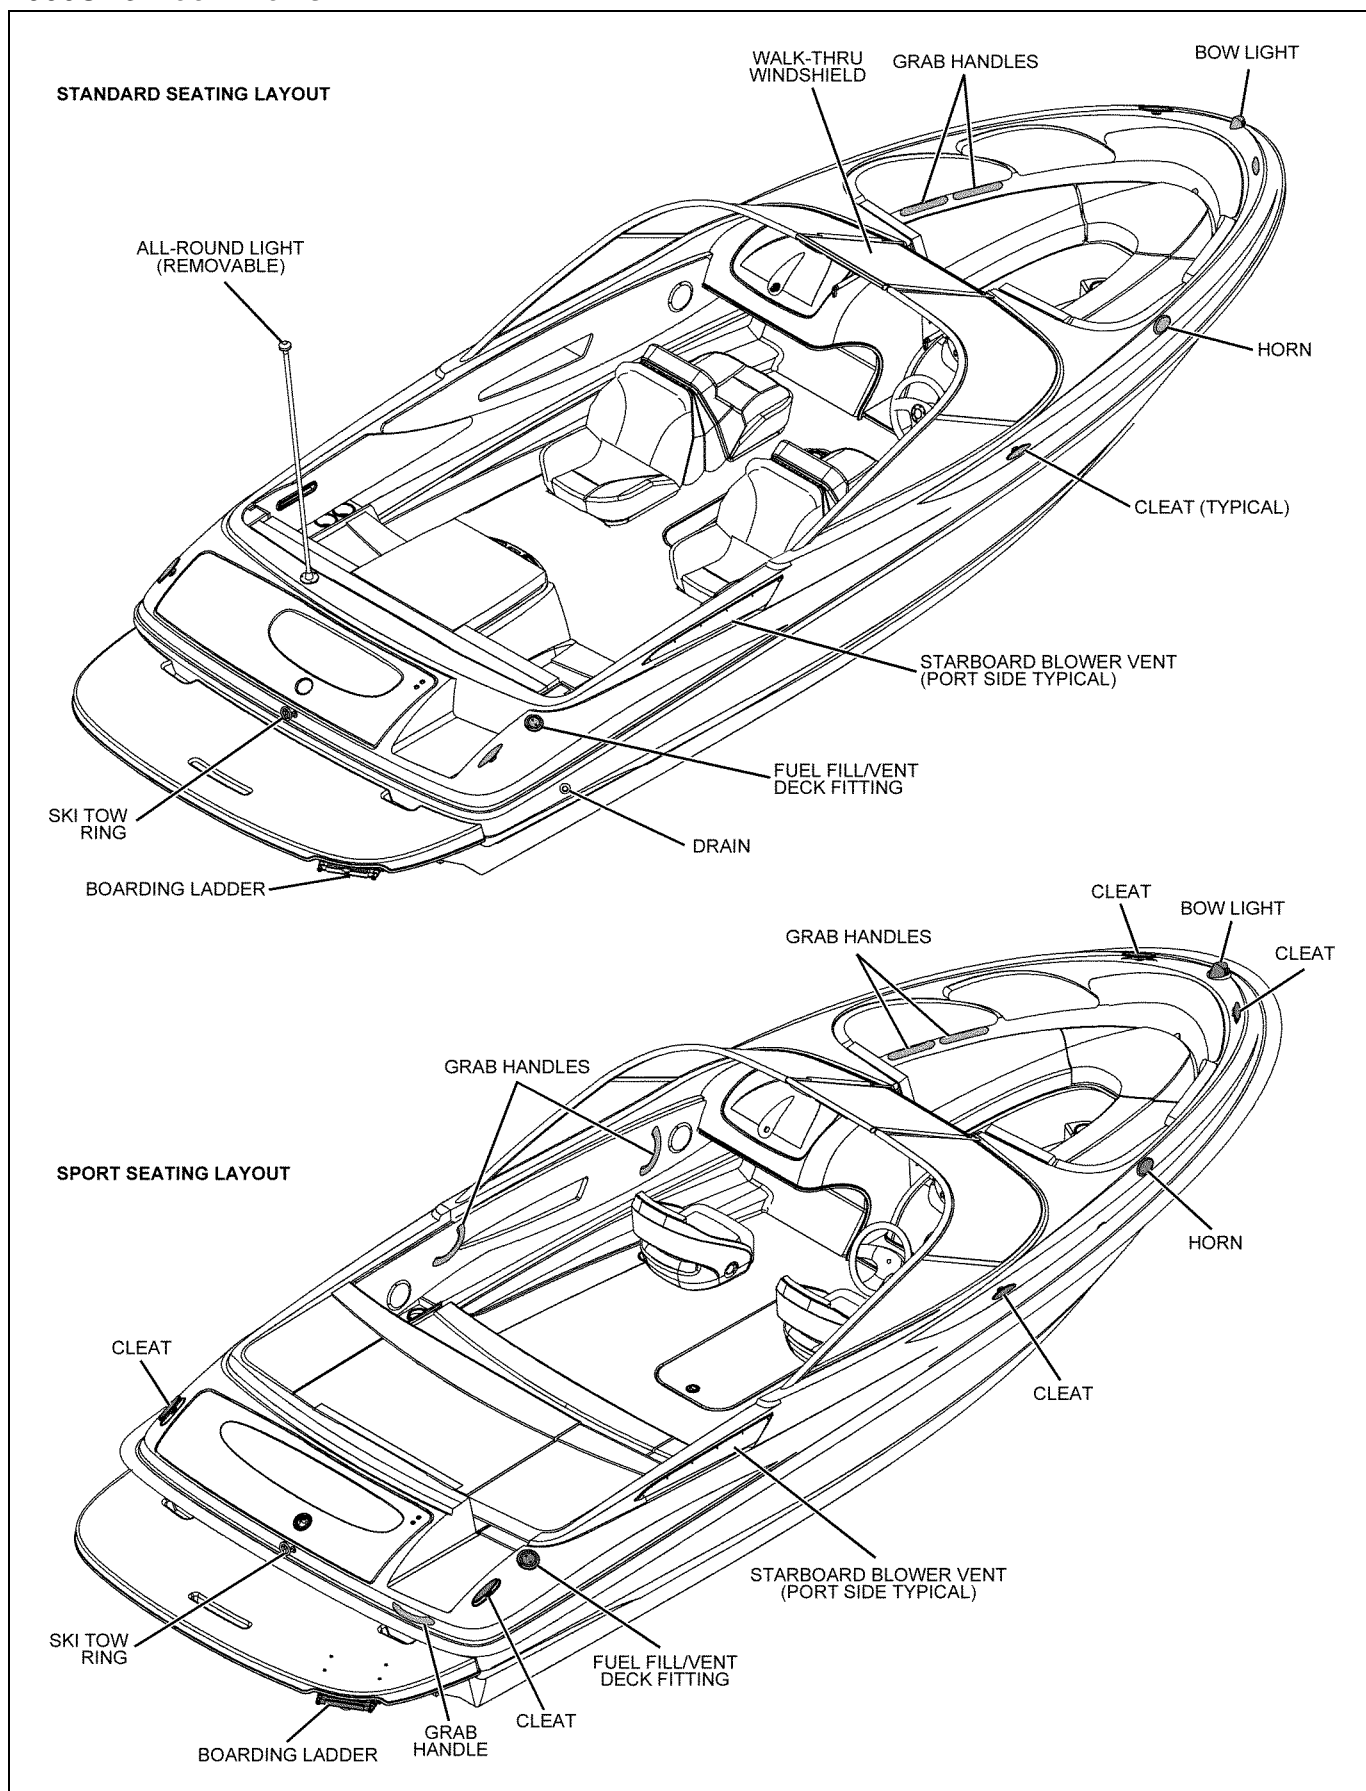
2000SR3 Deck Views

2100SC Deck Views

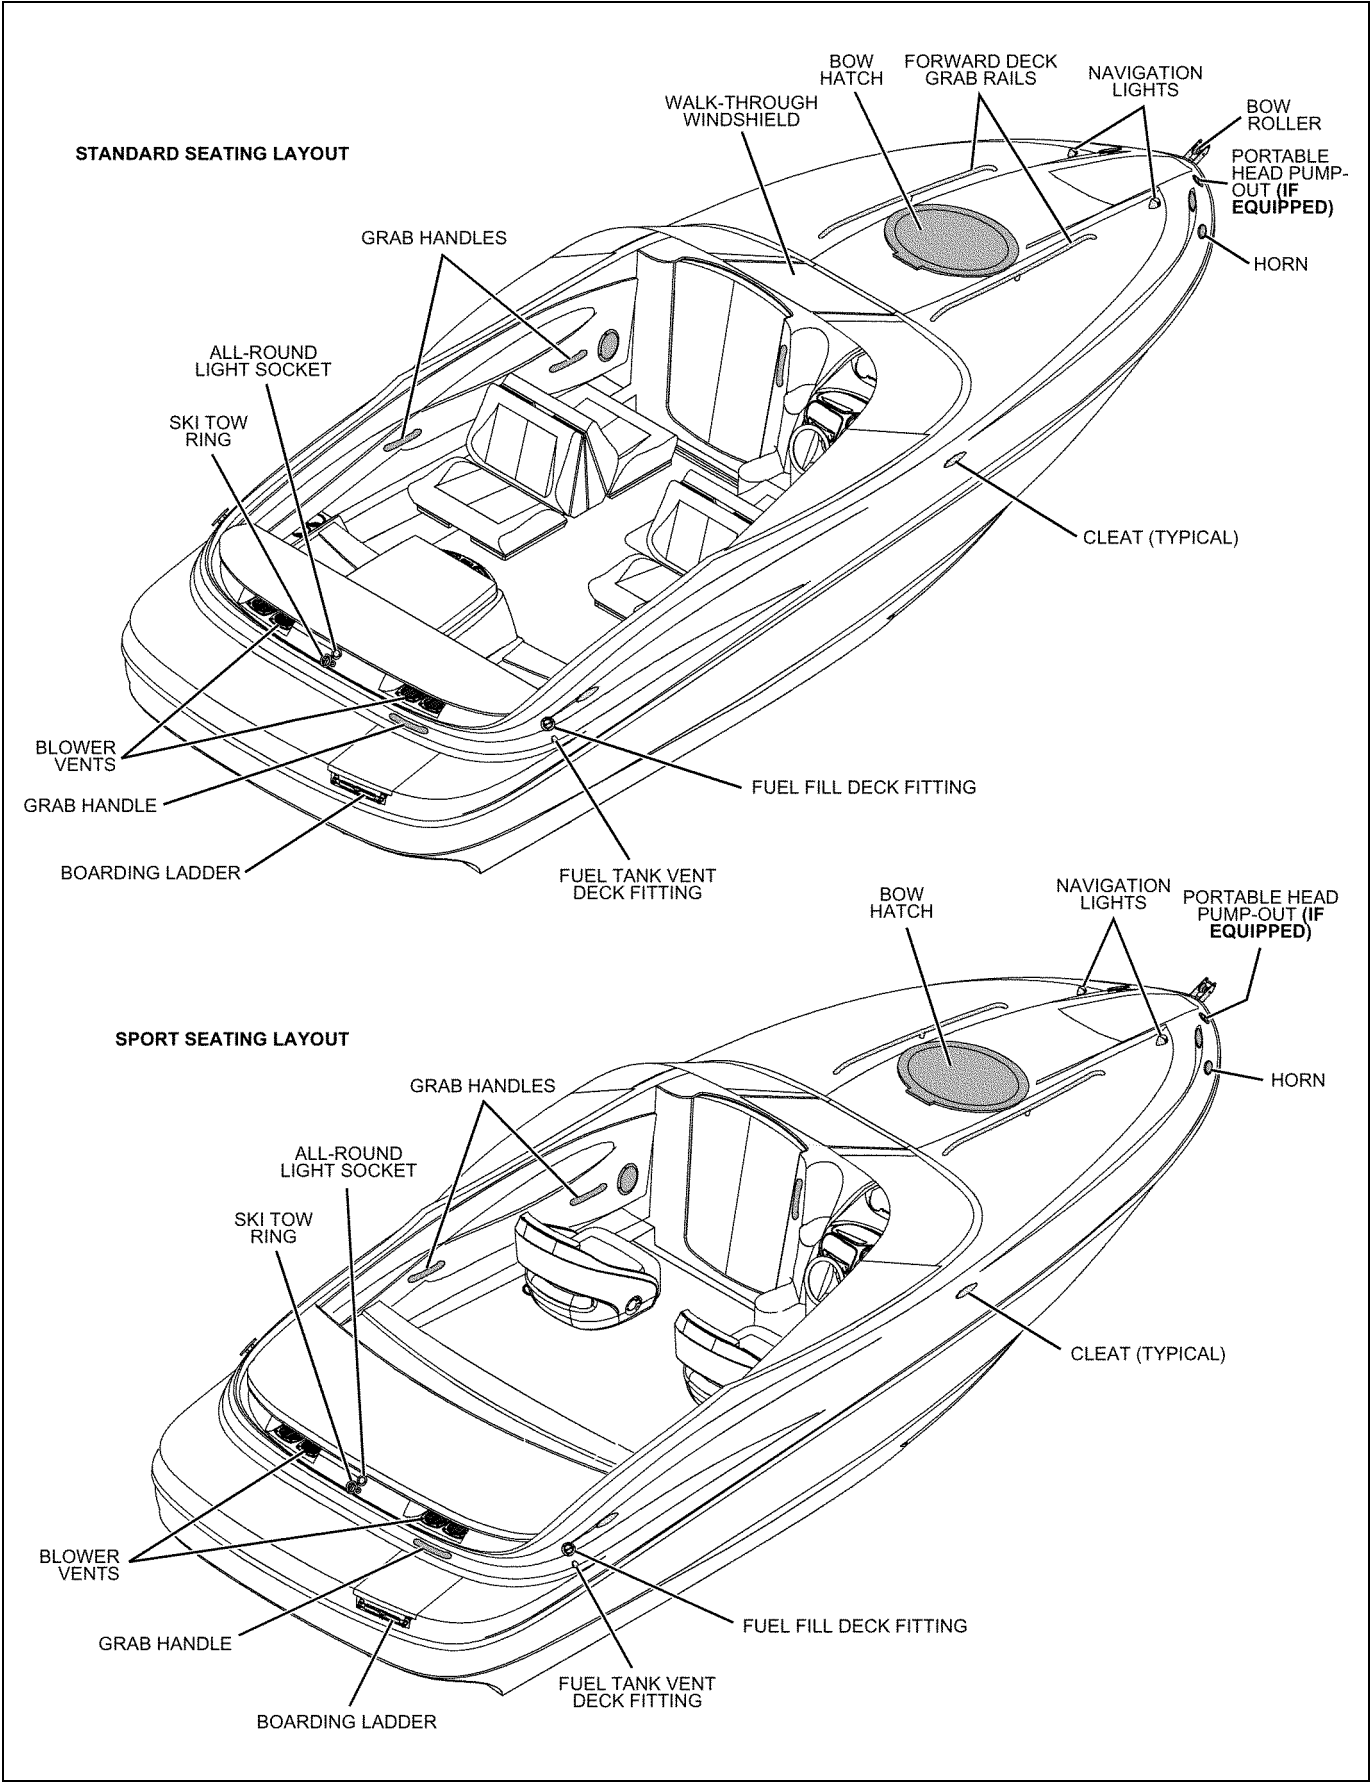


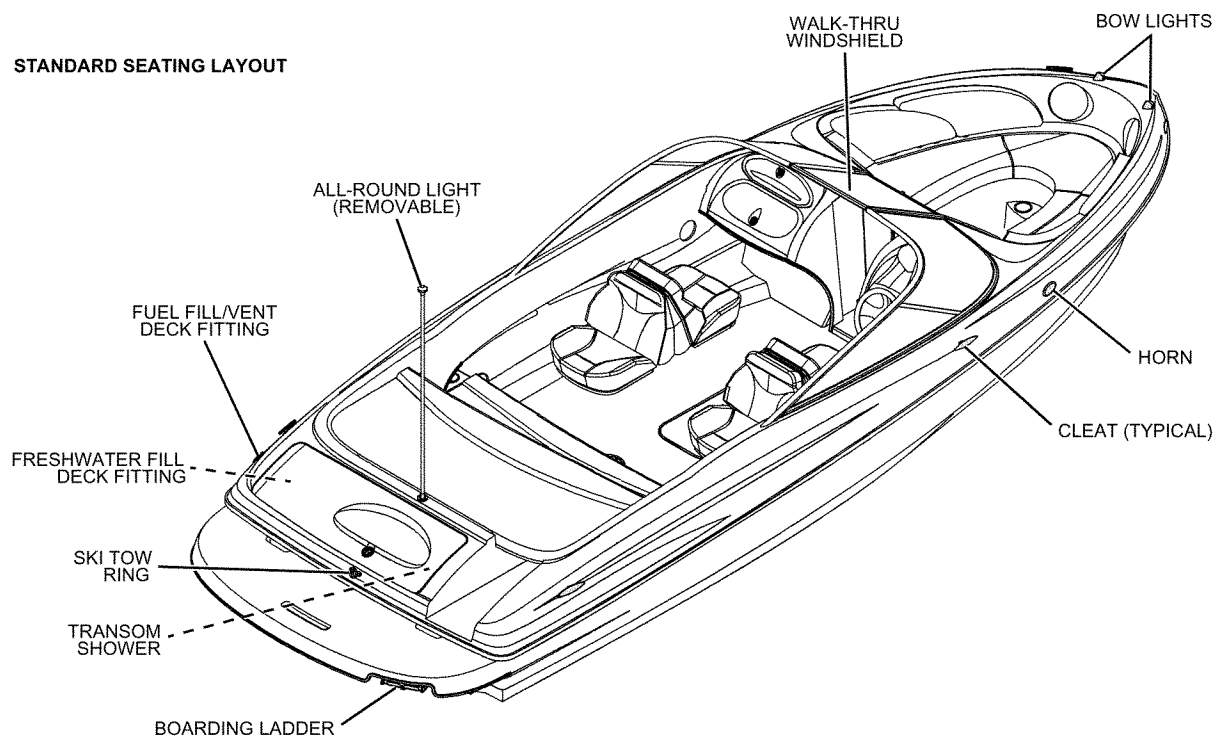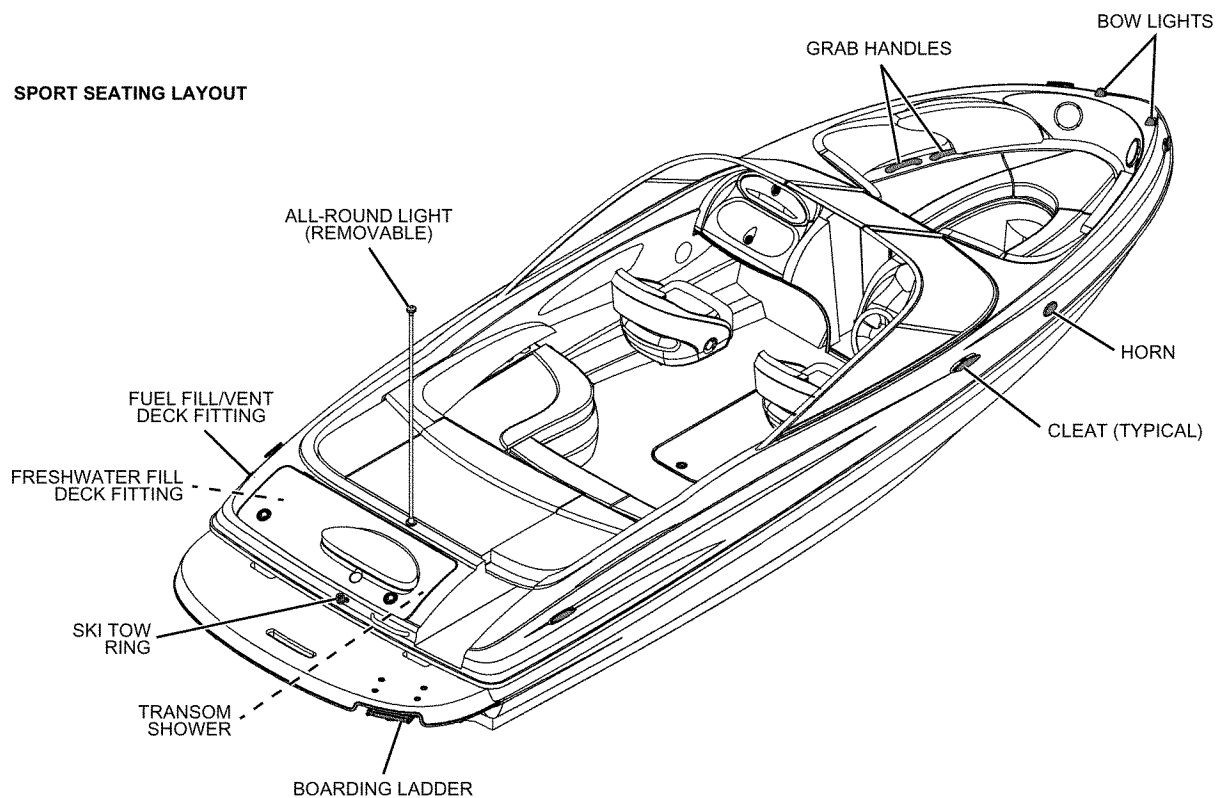2200SR3 Deck View**STANDARD SEATING LAYOUT****SPORT SEATING LAYOUT**

Helm Views
1800MX

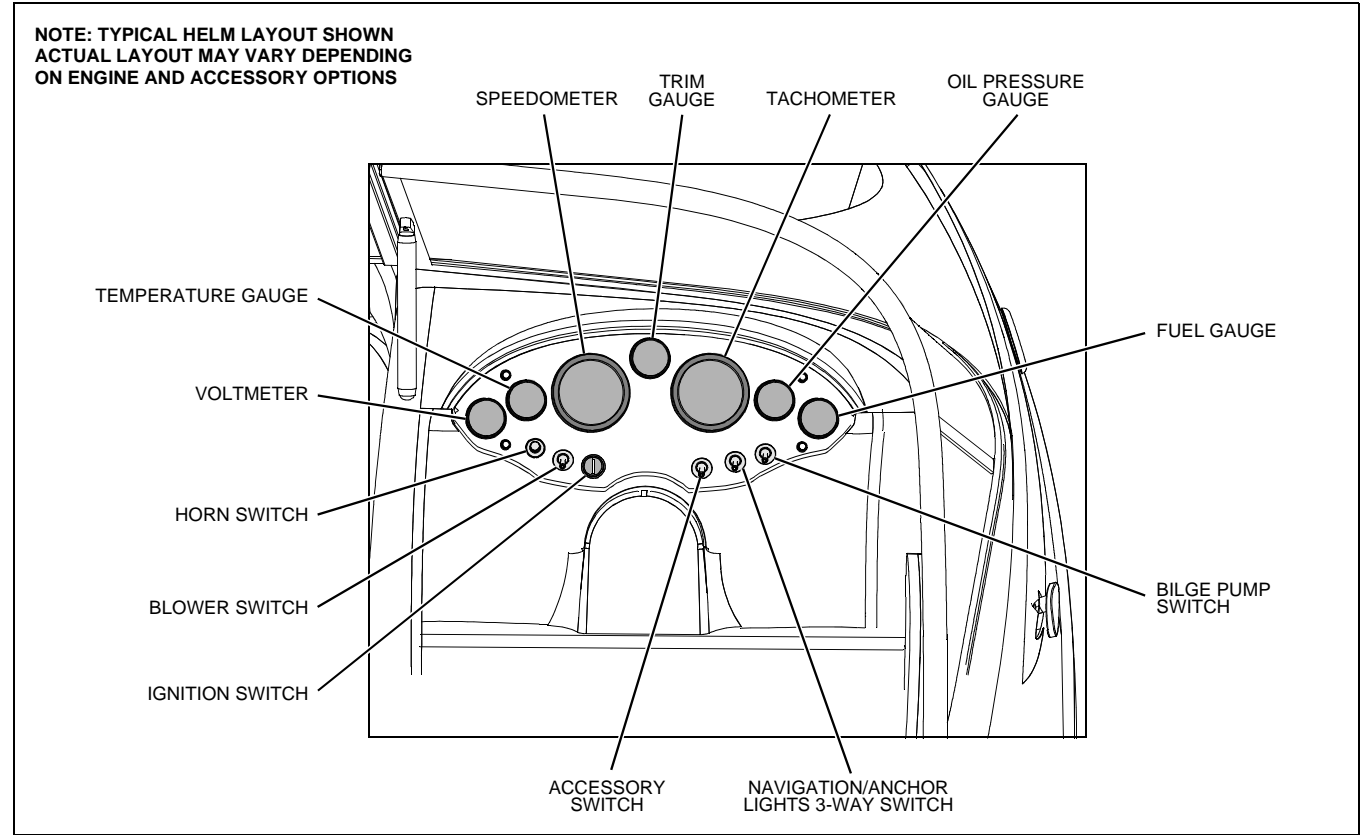


1800SR3, 1900SR3, & 2000SR3

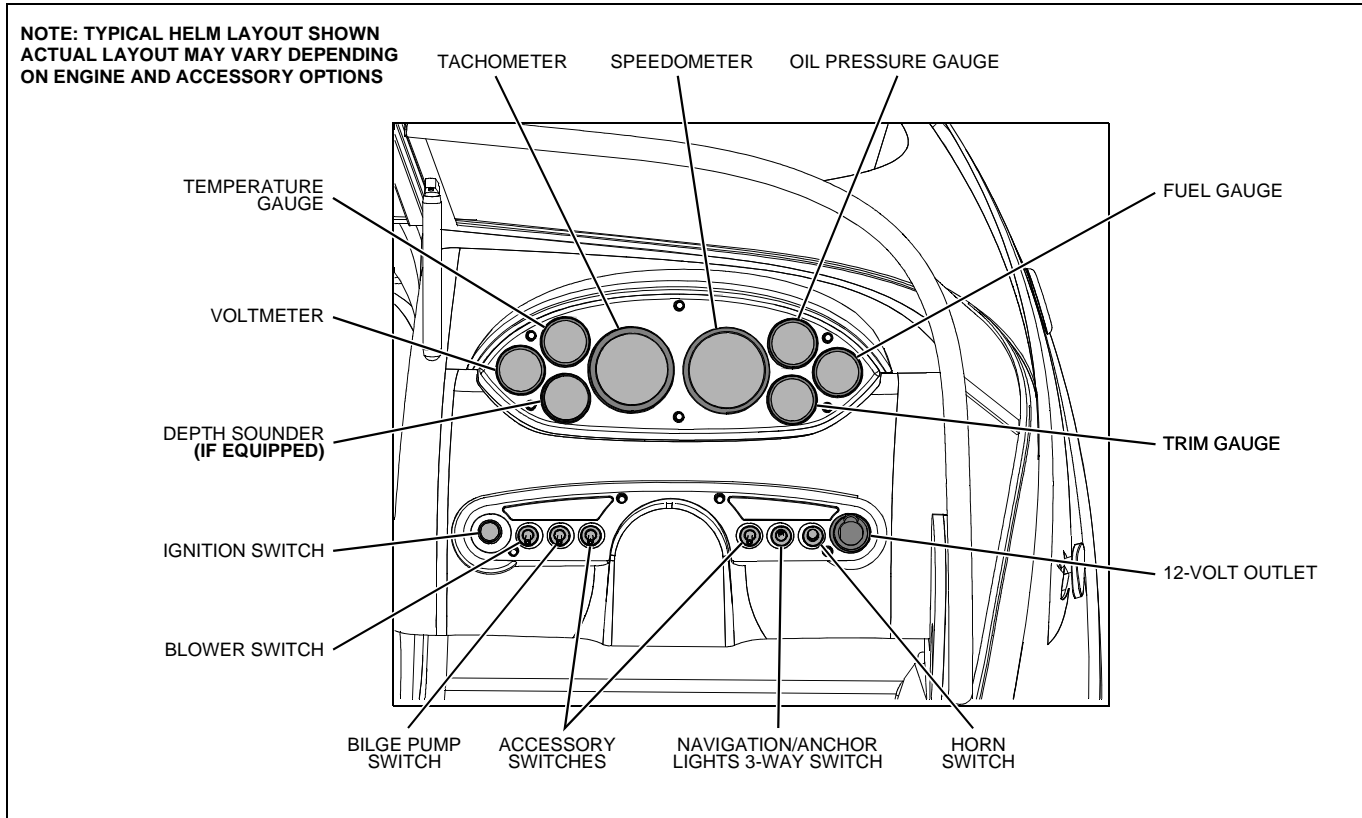


2100SC

**NOTE: TYPICAL HELM LAYOUT SHOWN
ACTUAL LAYOUT MAY VARY DEPENDING
ON ENGINE AND ACCESSORY OPTIONS**

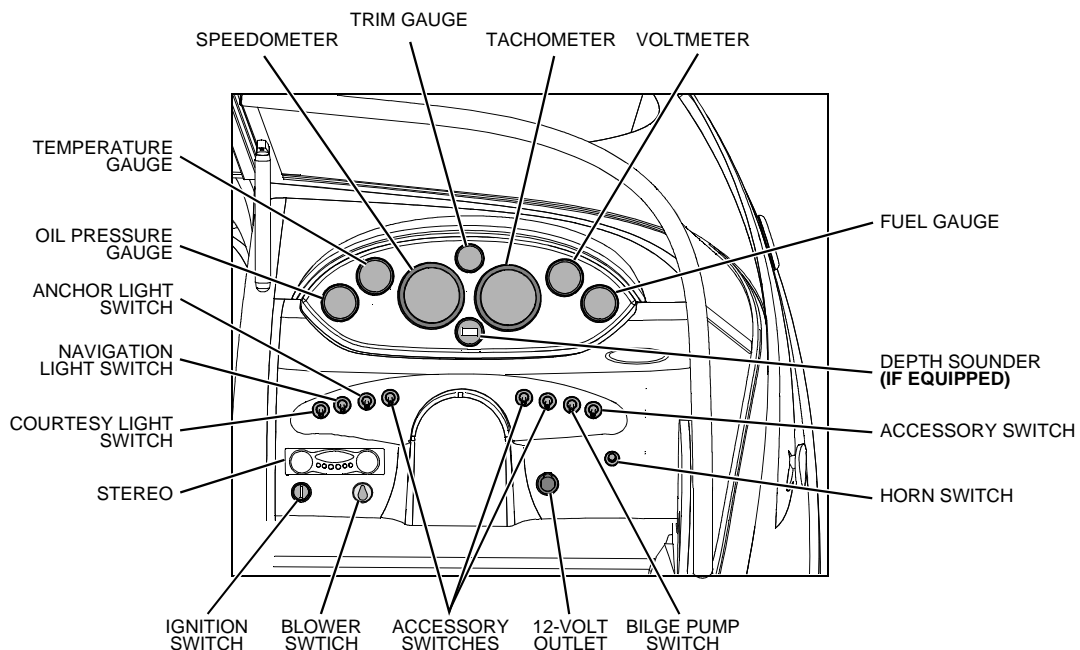
**2200SR3**

**NOTE: TYPICAL HELM LAYOUT SHOWN
ACTUAL LAYOUT MAY VARY DEPENDING
ON ENGINE AND ACCESSORY OPTIONS**

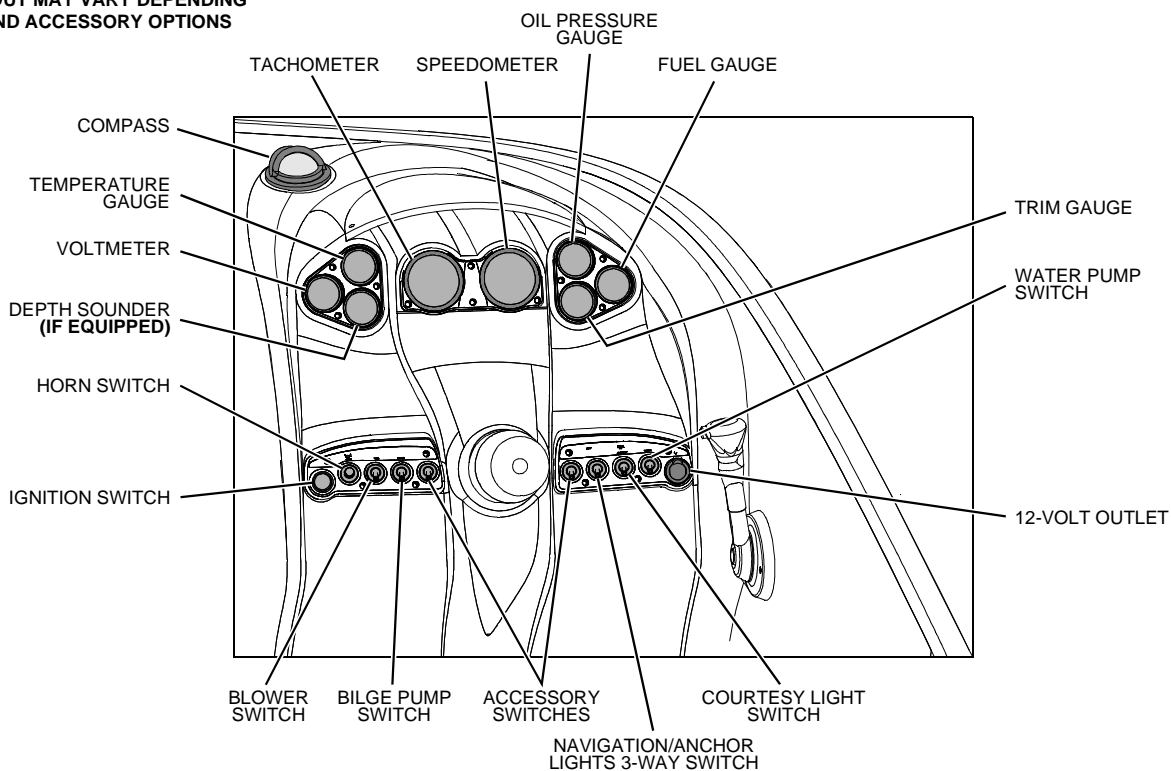


Component Locations

12-Volt Accessory Outlet - 1800MX: Located next to the CD player in the port glove box.

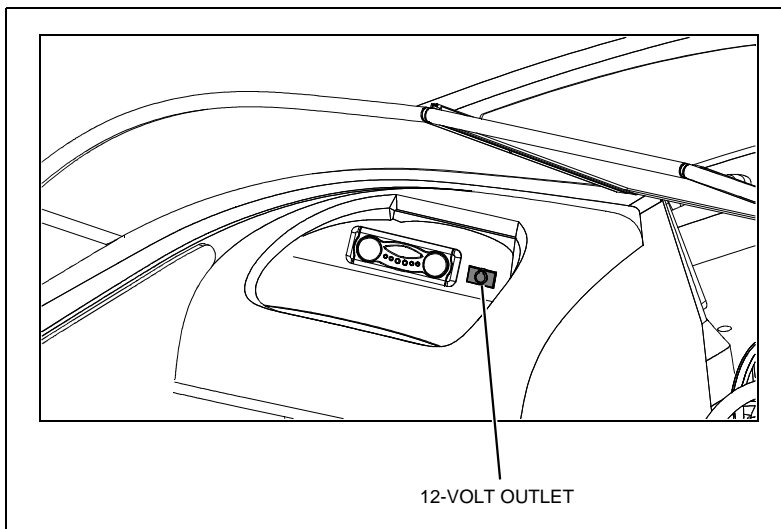


12-Volt Accessory Outlets - 1800SR3 & 2000SR3: One at the helm on the starboard switch panel, and one next to the CD player in the port glove box.

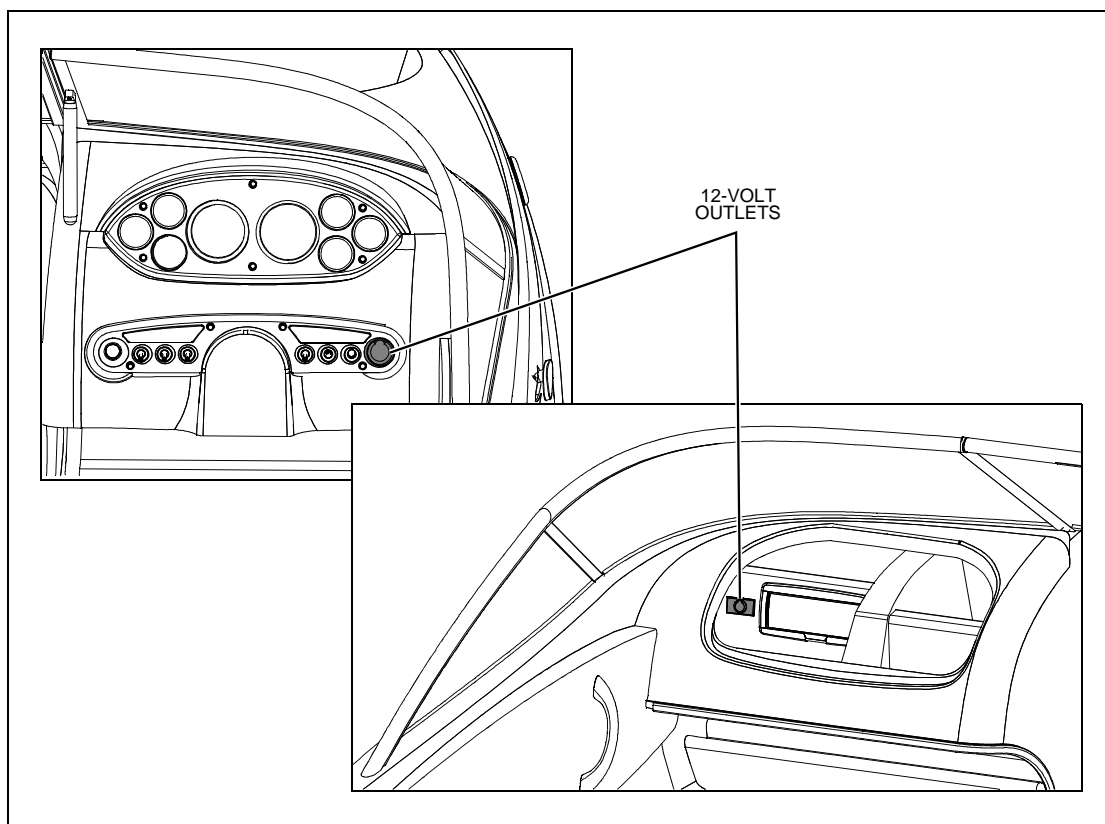


12-Volt Accessory Outlets -

1900SR3: One at the helm on the starboard switch panel, and one next to the CD player in the port glove box.

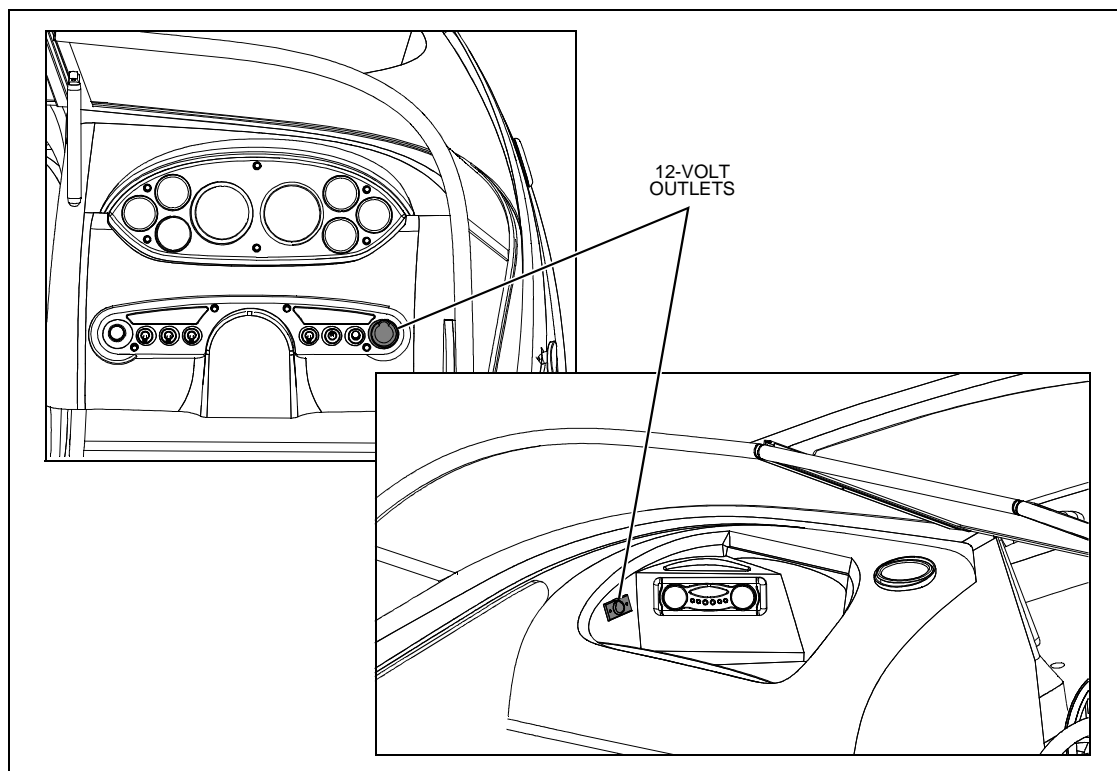


12-Volt Accessory Outlet - 2100SC: Located at the helm, on the starboard side.

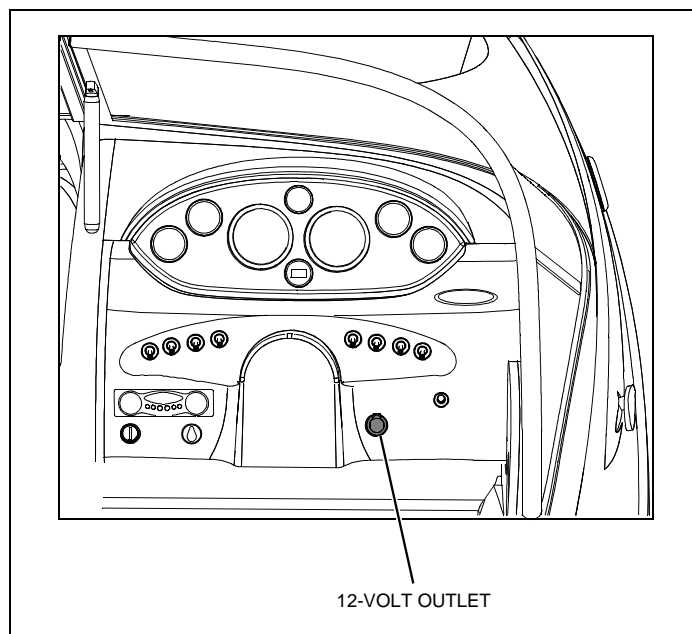


12-Volt Accessory Outlets - 2200SR3:


One on the starboard switch panel and one next to the CD player in the port glove box.

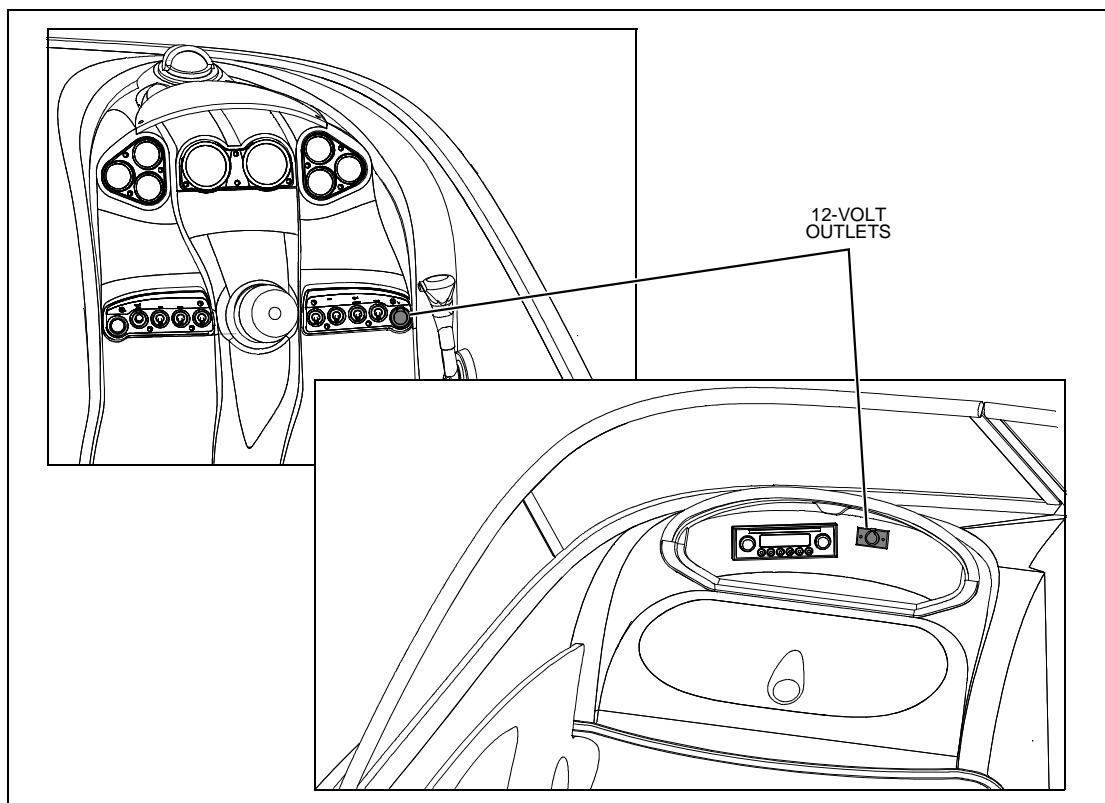**Battery - 1800MX:**


- **Standard Seating Layout:** Access is through the hatch located under the starboard jump seat.

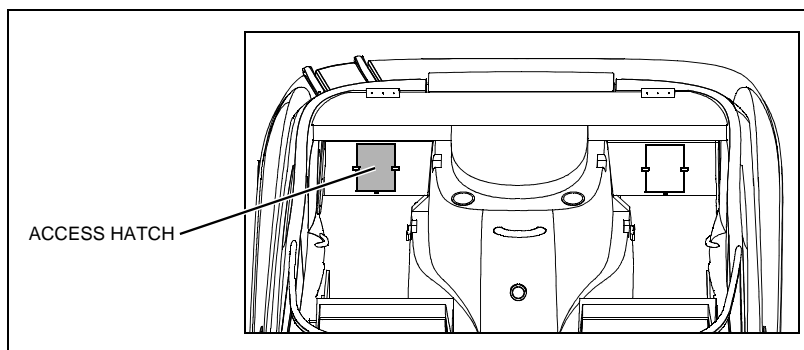

- **Sport Seating Layout:** Located on the port side of the engine compartment.

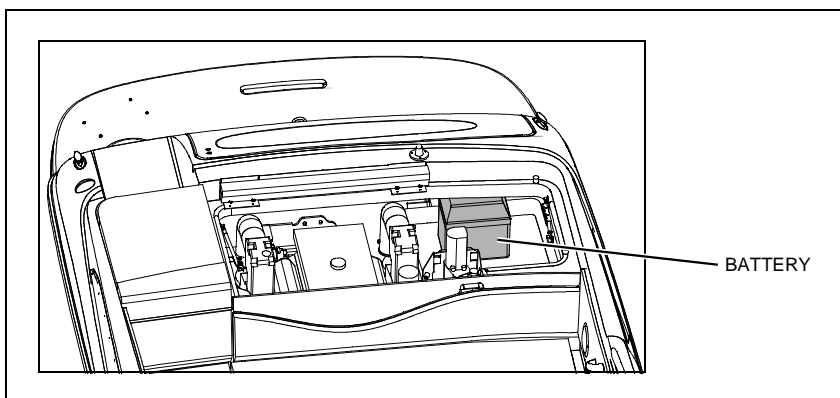


Battery - 1800SR3, 1900SR3, 2000SR3 & 2200SR3: Located on the port side of the engine compartment.

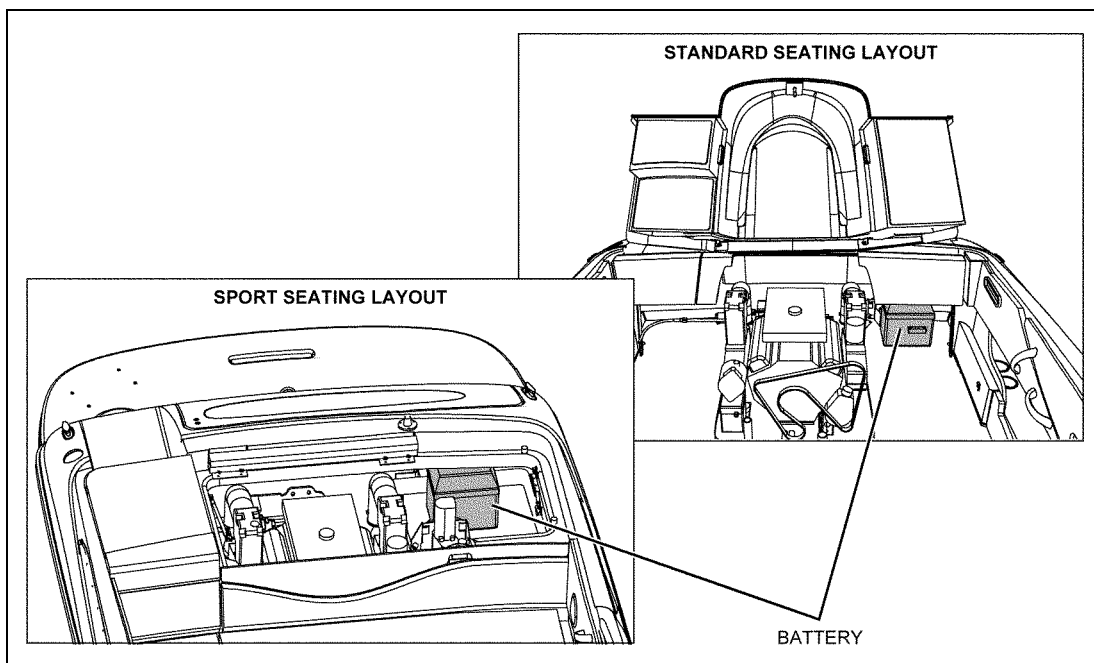


Battery 2100SC:


- **Standard Seating Layout:** Access is through the hatch under the port jump seat.

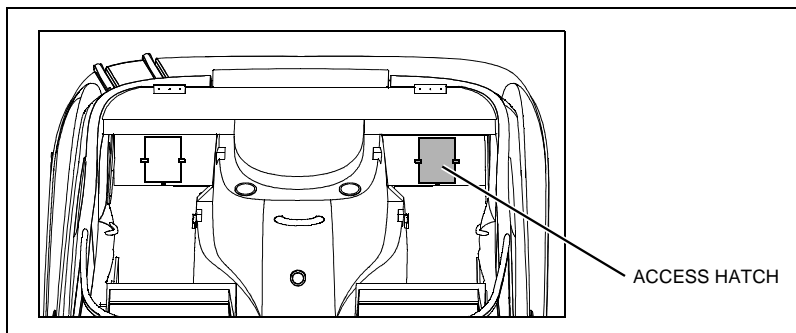


- **Sport Seating Layout:** Located on the port side of the engine compartment.

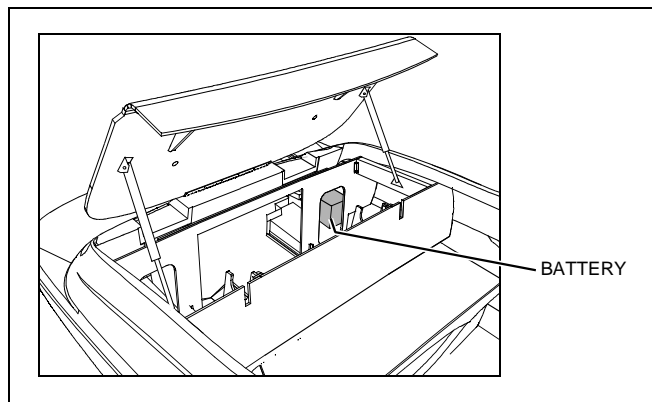


Battery Switch (If Equipped): Located on the port side of the engine compartment.

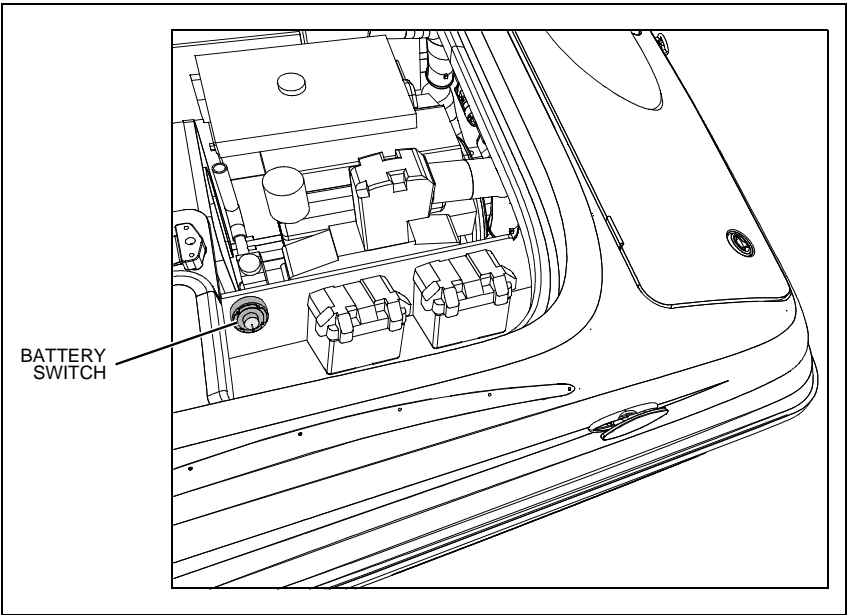


Bilge Pump: Located in the engine compartment, forward of the engine.

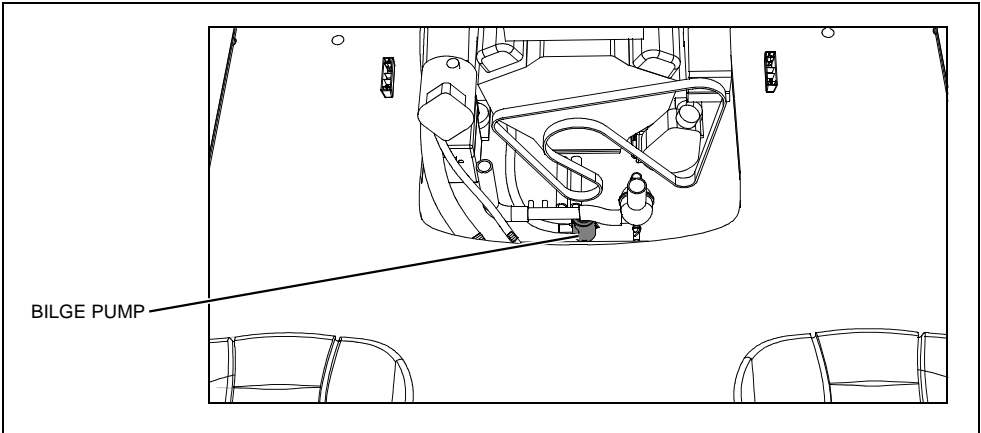


Blower Switch - 1800MX: Located at the helm, on the ignition switch panel.

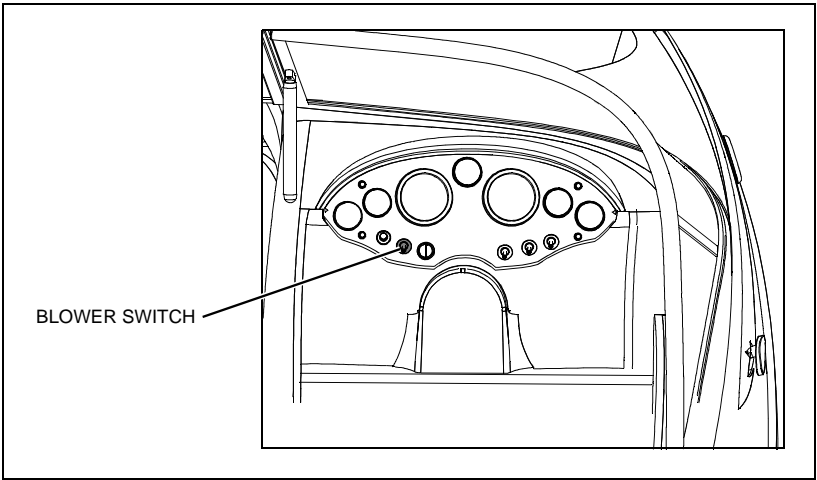


Blower Switch - 1800SR3, 1900SR3 & 2000SR3: Located at the helm, on the ignition switch panel.

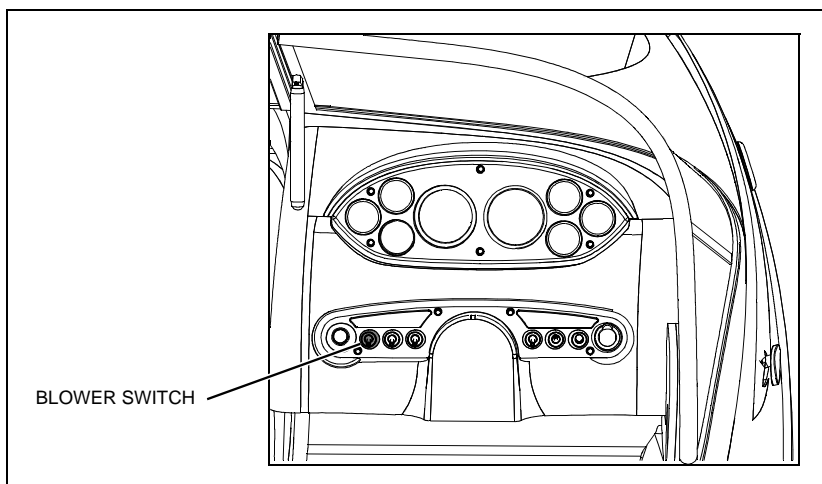


Blower Switch - 2100SC: Located at the helm, below the stereo.

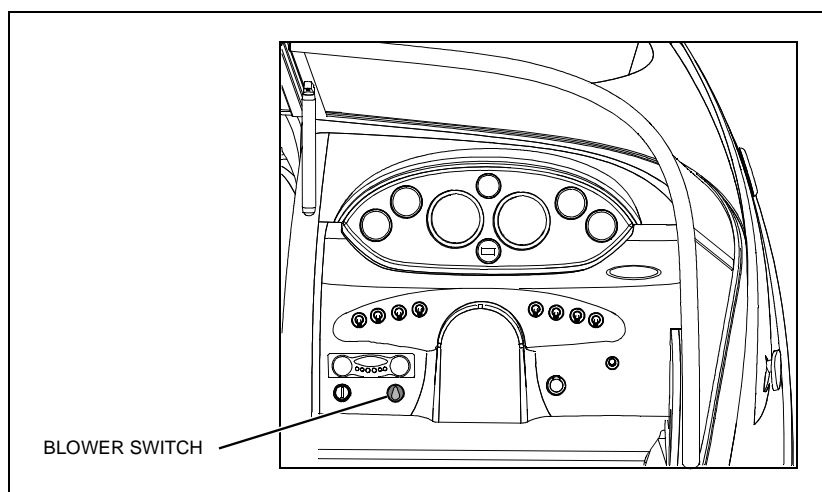


Blower Switch - 2200SR3: Located at the helm, on the ignition switch panel.

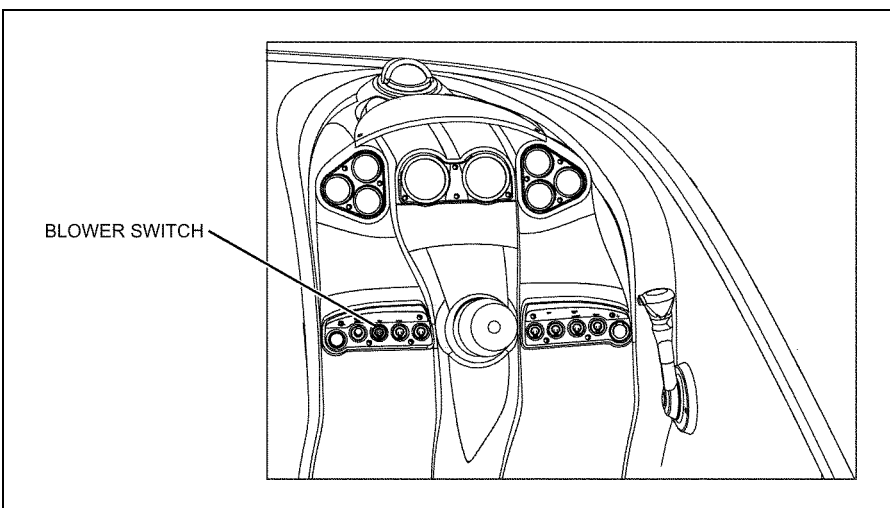


Carbon Monoxide Detector (2100SC Only): Located on the starboard aft wall of the cuddy cabin.

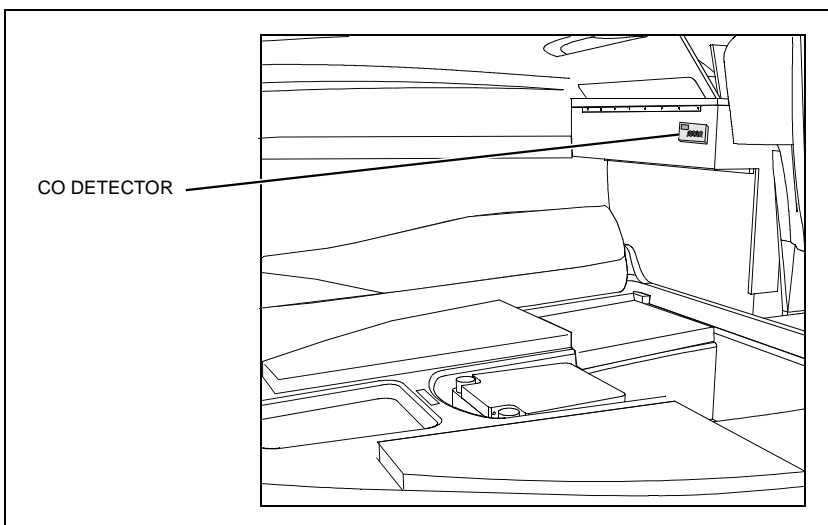


Depth Sounder Transducer: Located in the engine compartment, forward of the engine.

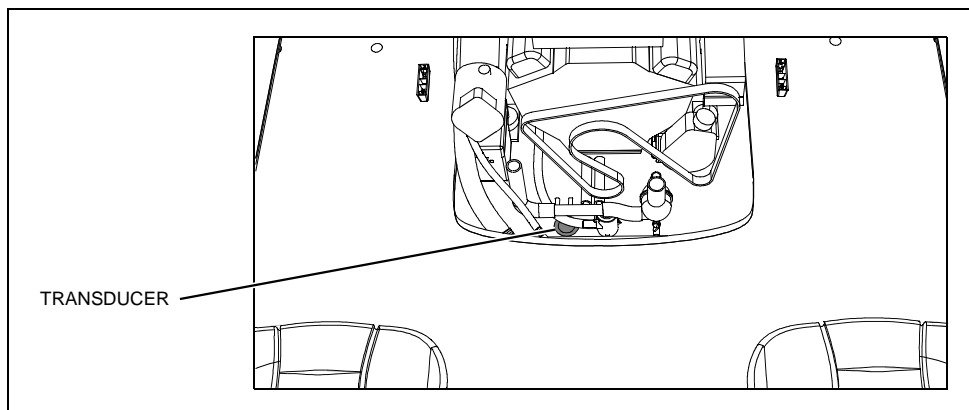


Engine Circuit Breaker: Located on the engine.

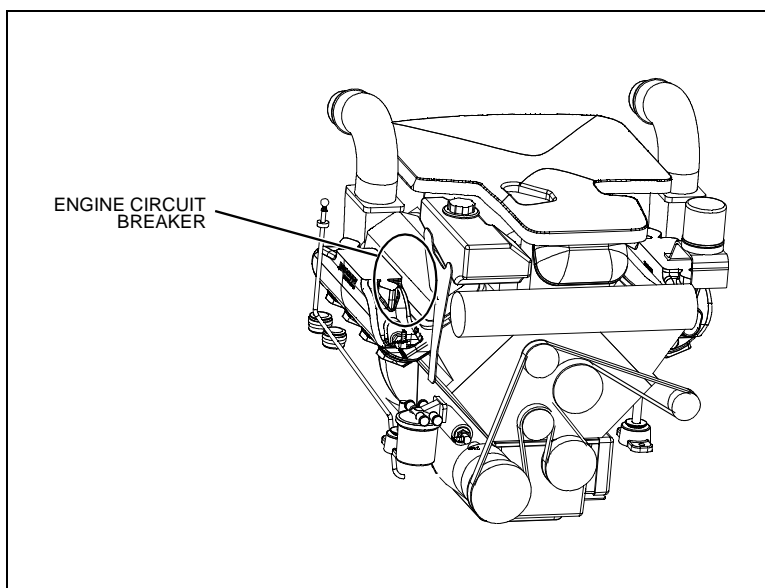


Freshwater Fill Deck Fitting (2200SR3 Only): Located inside the transom storage hatch.

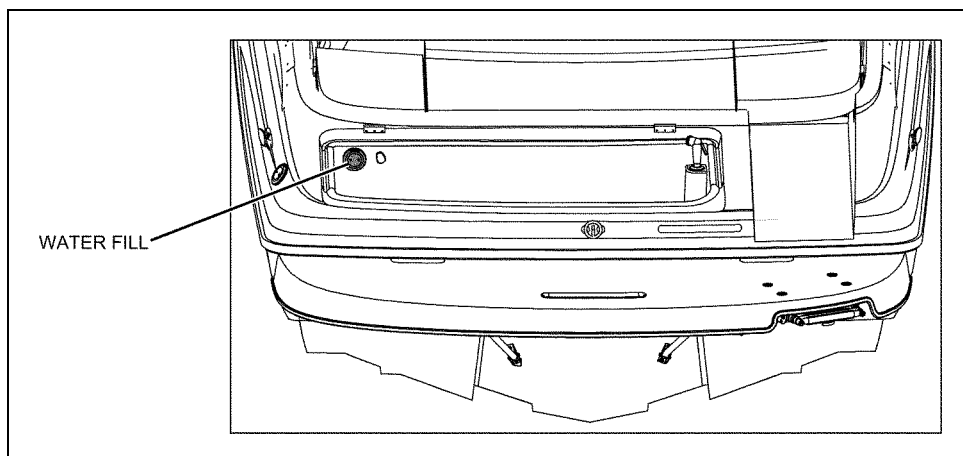


Freshwater Pump & Filter (2200SR3 Only): Located on the port side of the engine compartment.

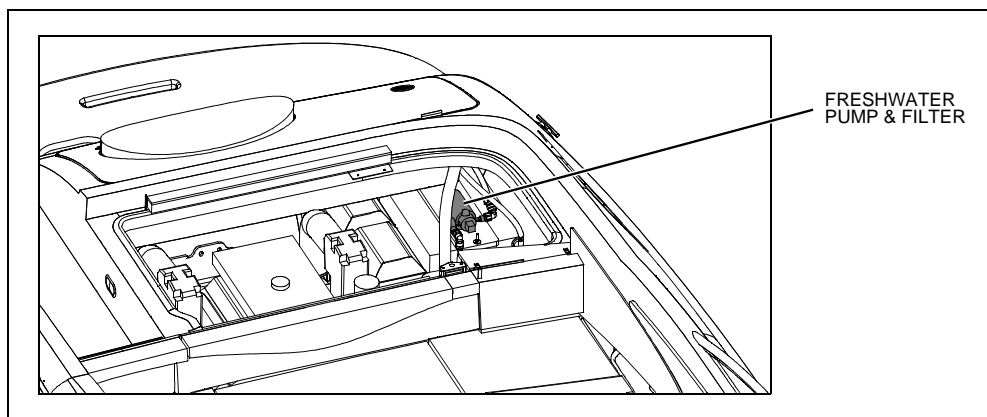


Freshwater Pump Switch (2200SR3 Only): Located at the helm, on the starboard switch panel.

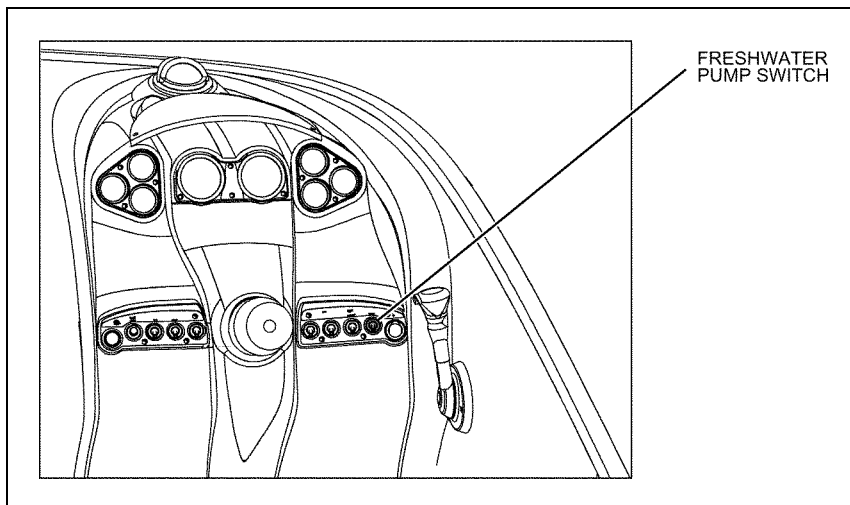


Freshwater Tank (2200SR3 Only): Located on the port side of the engine compartment.

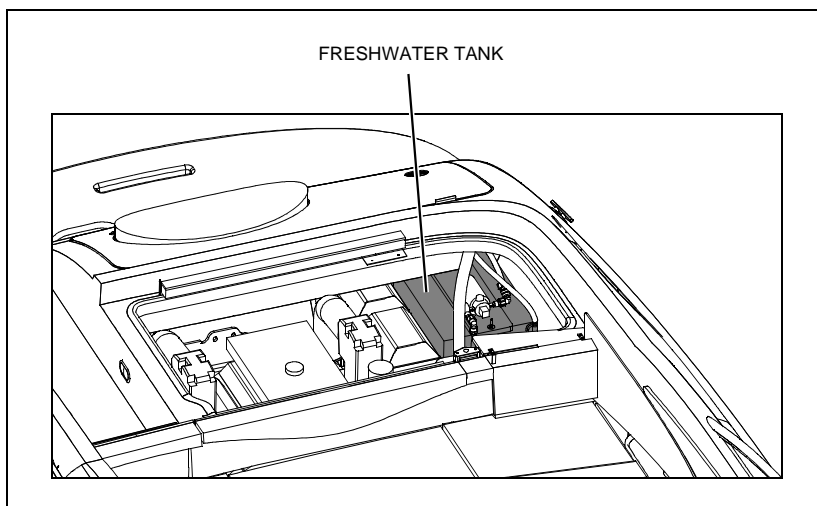


Fuel Fill/Vent Deck Fitting - 1800SR3, 1900SR3, 2000SR3, & 2100SC: Located on the starboard aft corner of the deck.

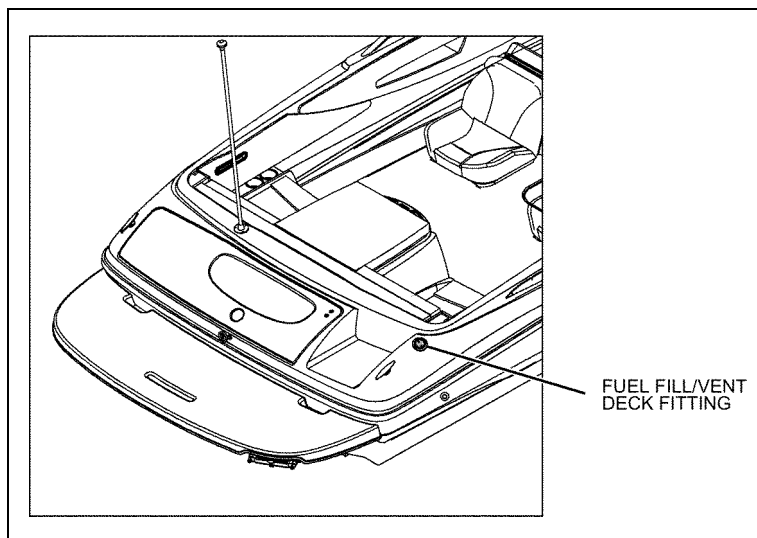


Fuel Fill/Vent Deck Fitting - 1800MX & 2200SR3: Located on the port aft corner of the deck.

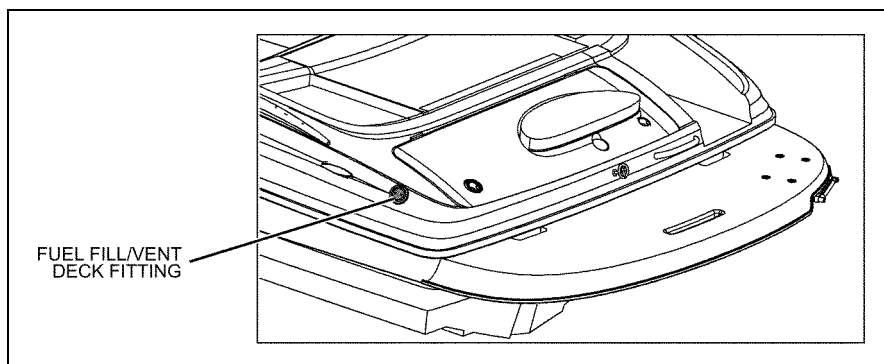


Fuel Tank - 1800MX: Located in the engine compartment, on the port side of the engine.

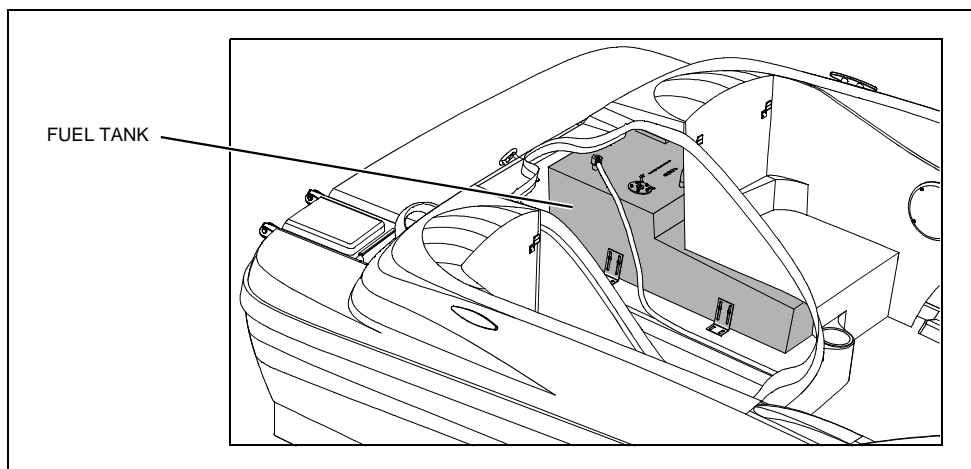


Fuel Tank - 1800SR, 1900SR, 2000SR, 2100SC, & 2200SR: Located in the engine compartment, forward of the engine.

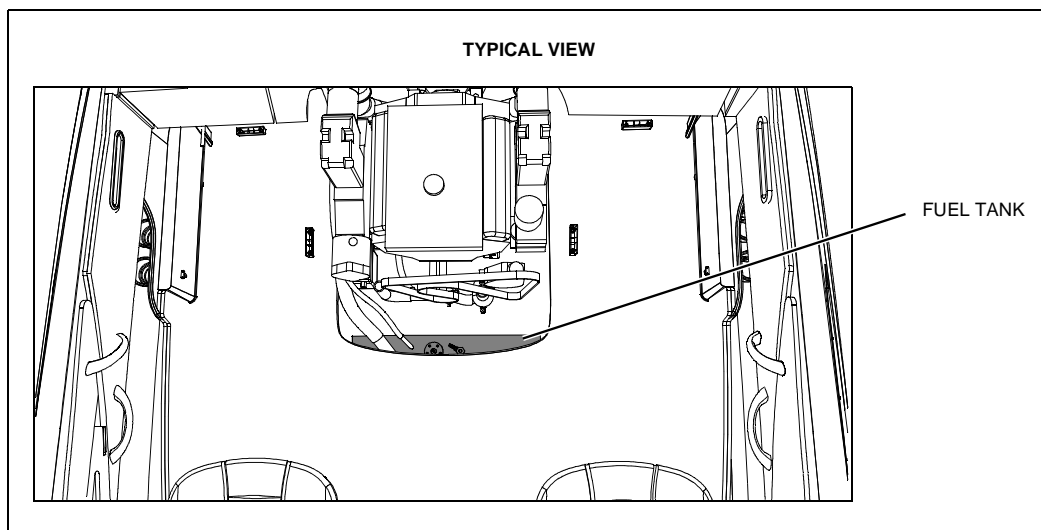


Fuse Block- 1800MX, 1800SR, 1900SR, & 2000SR: Access is through the starboard aft seat back in the bow seating area.

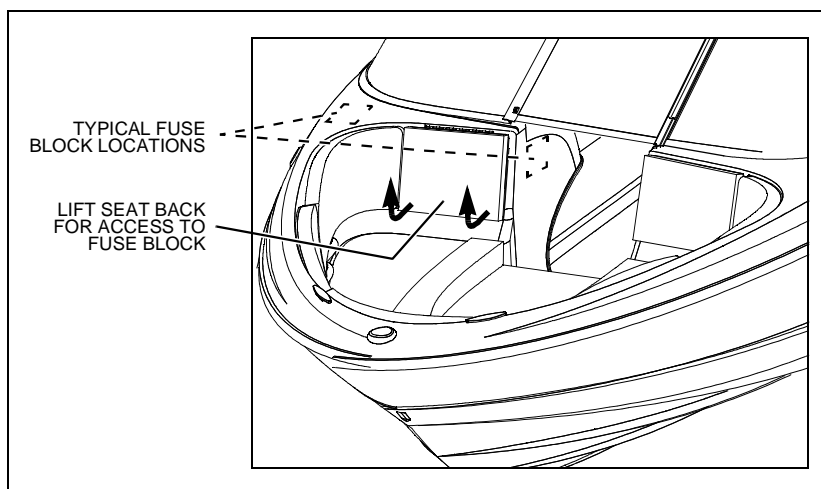


Fuse Block - 2100SC: Access is through the access panel in the cuddy cabin on the starboard aft wall.

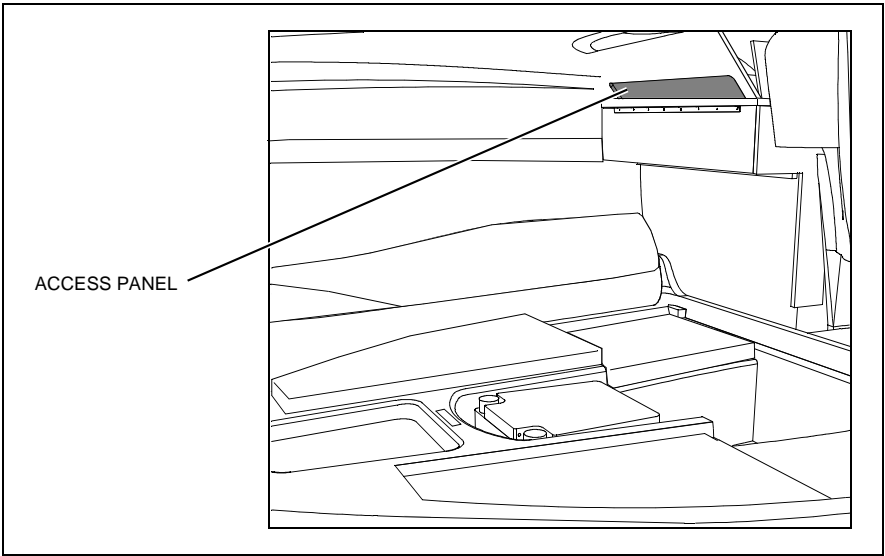


Fuse Block - 2200SR: Access is under the helm dash.

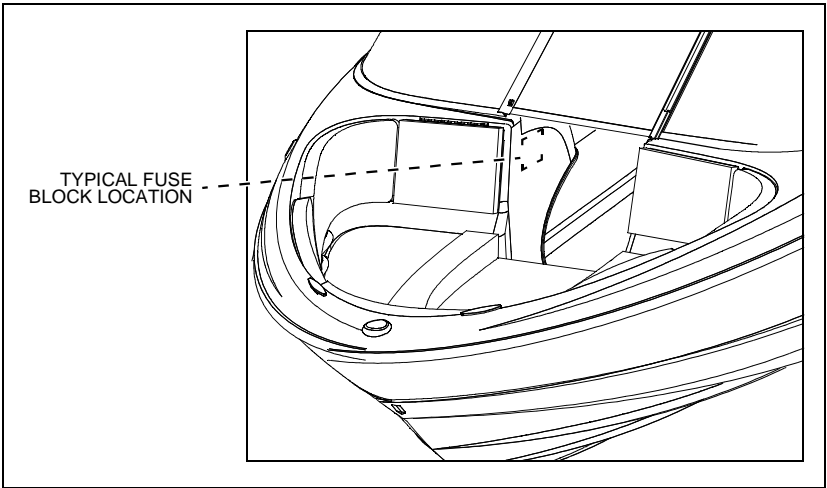


Navigation Lights: Red and green lights at the bow. White all-around light on the transom.

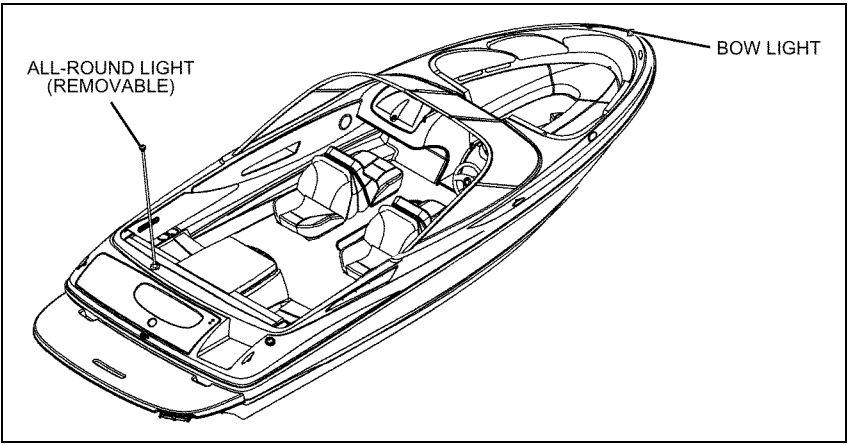


Portable Head (2100SC Only) (If Equipped): Located in the cuddy cabin.

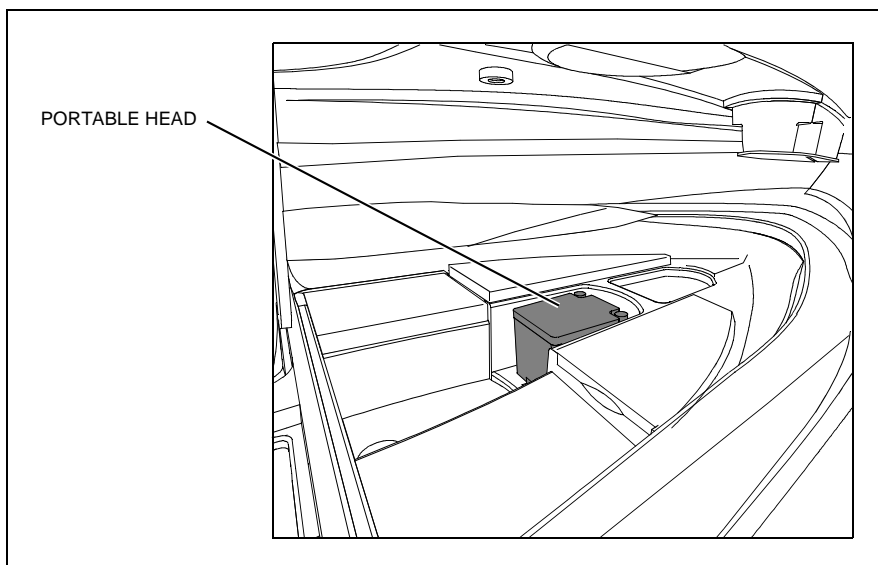

Portable Head Pump-Out Deck Fitting (2100SC Only) (If Equipped): Located at the bow.

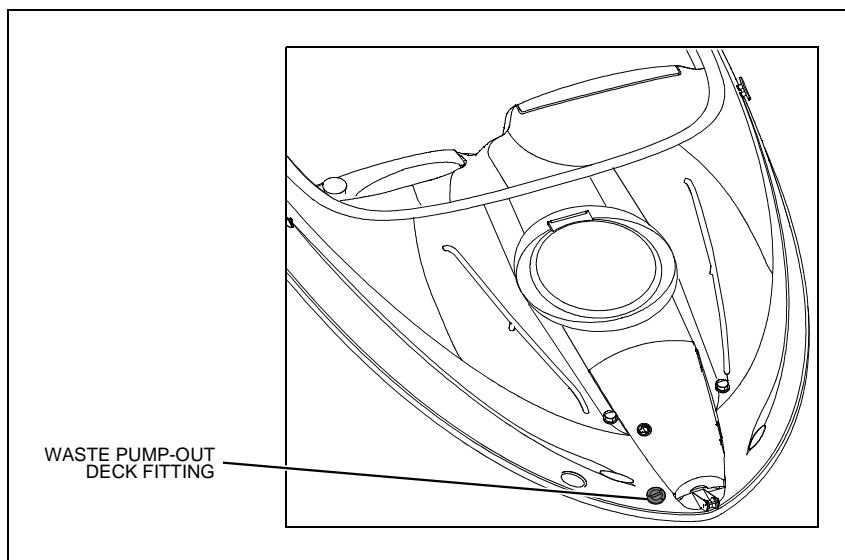

Transom Shower (2200SR3 Only): Located inside the transom storage hatch.

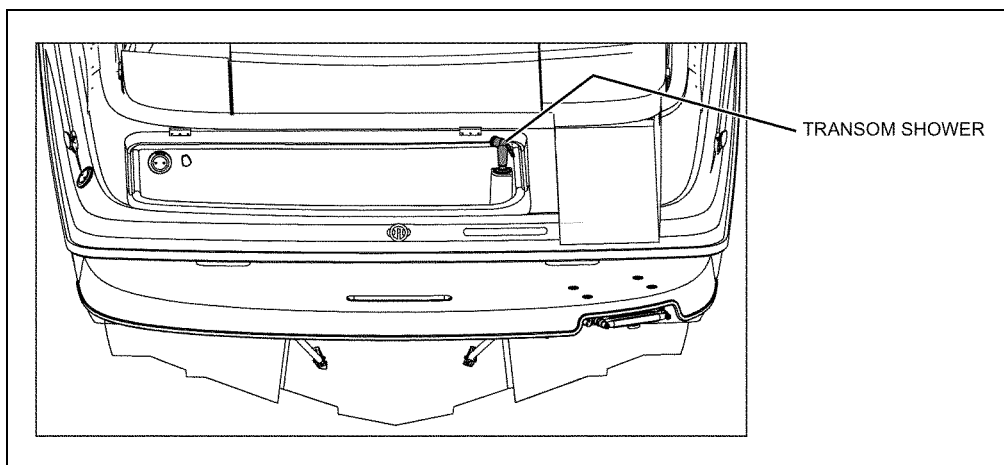

Chapter 4: Propulsion & Related Systems

Engine


Read the engine operation and maintenance manuals *before* starting or doing any maintenance on the engine.


Special Starting Instructions for Carbureted Engines (If Equipped)

Some carbureted engines can be difficult to start when they are cold. In addition to following *all* instructions and heeding *all* warnings in the engine manual, try the following:

1. Pump the throttle lever from the 1/4 throttle position to the full throttle position 3 or 4 times.
2. Return the throttle lever to the 1/4 throttle position.
3. Continue the starting procedure as described in the engine manual.

Bilge Blower System


WARNING!




FIRE/EXPLOSION HAZARD

- Use of the bilge blower system is *NOT A GUARANTEE* that explosive fumes have been removed.
- *BEFORE* starting the engine *ALWAYS* use the "sniff test" to check the engine and bilge areas for fuel vapors.
- If you smell fuel, do *NOT* start the engine and do *NOT* turn *On* any electrical devices.
- If you smell fuel and the engine is already running, shut *Off* the engine and turn *Off* all electrical devices. Investigate *immediately*.
- Do *NOT* obstruct or modify the bilge blower system.

- The bilge blower removes explosive fumes from the engine and bilge areas.
- Fresh air is drawn into the engine and bilge areas through the vents.

To make sure the engine and bilge areas are properly ventilated:

- Use the "sniff test" to check the engine and bilge areas for fuel vapors *before* starting the engine.
- *Always* run the bilge blower for at least four minutes *before* starting the engine.
- Continue to run the blower until your boat has reached cruising speed.
- *Always* run the blower when running the boat below cruising speed.

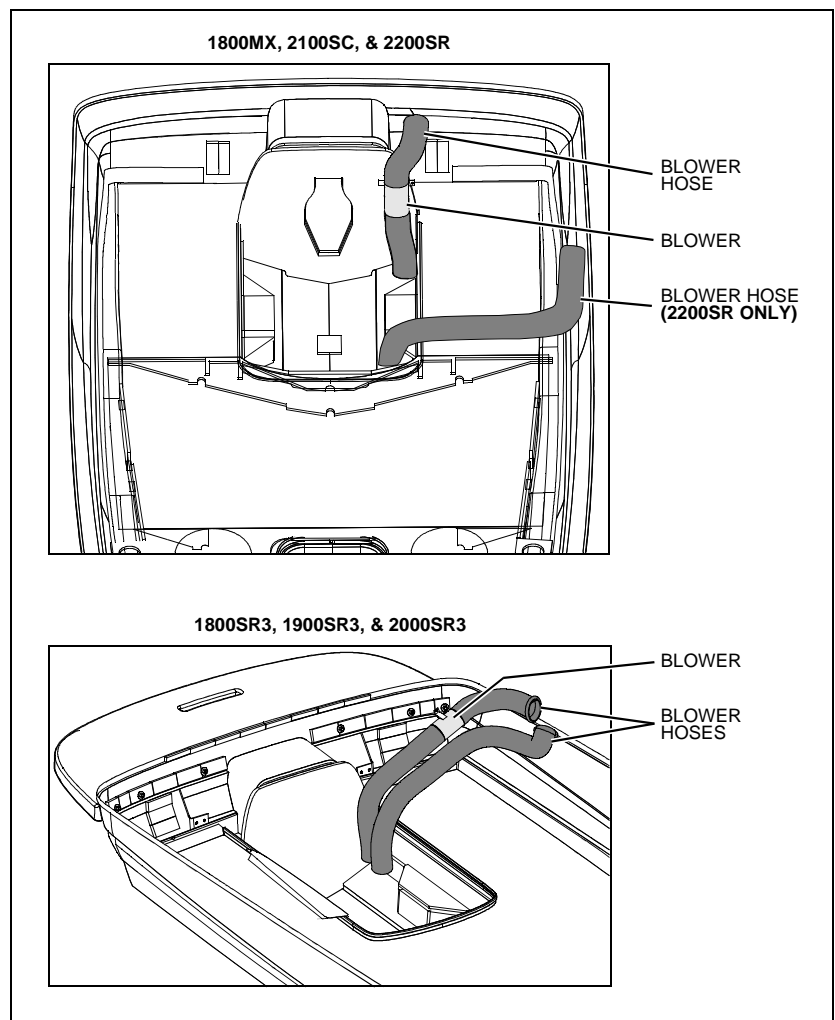

Fuel System

⚠ WARNING!



FIRE, EXPLOSION AND OPEN FLAME HAZARD!


- It is very important that the fuel system be inspected thoroughly the first time it is filled and at each subsequent filling.
- The fueling instructions in the *Sport Boat Owner's Manual* and the fuel recommendations in the engine operation manual *must* be followed.


CAUTION

Avoid the storage or handling of gear near the fuel lines, fittings and tank.

NOTICE

Carefully read the fuel section of both the *Sport Boat Owner's Manual* and the engine operation manual, paying special attention to the subject of *fuel recommendations*.

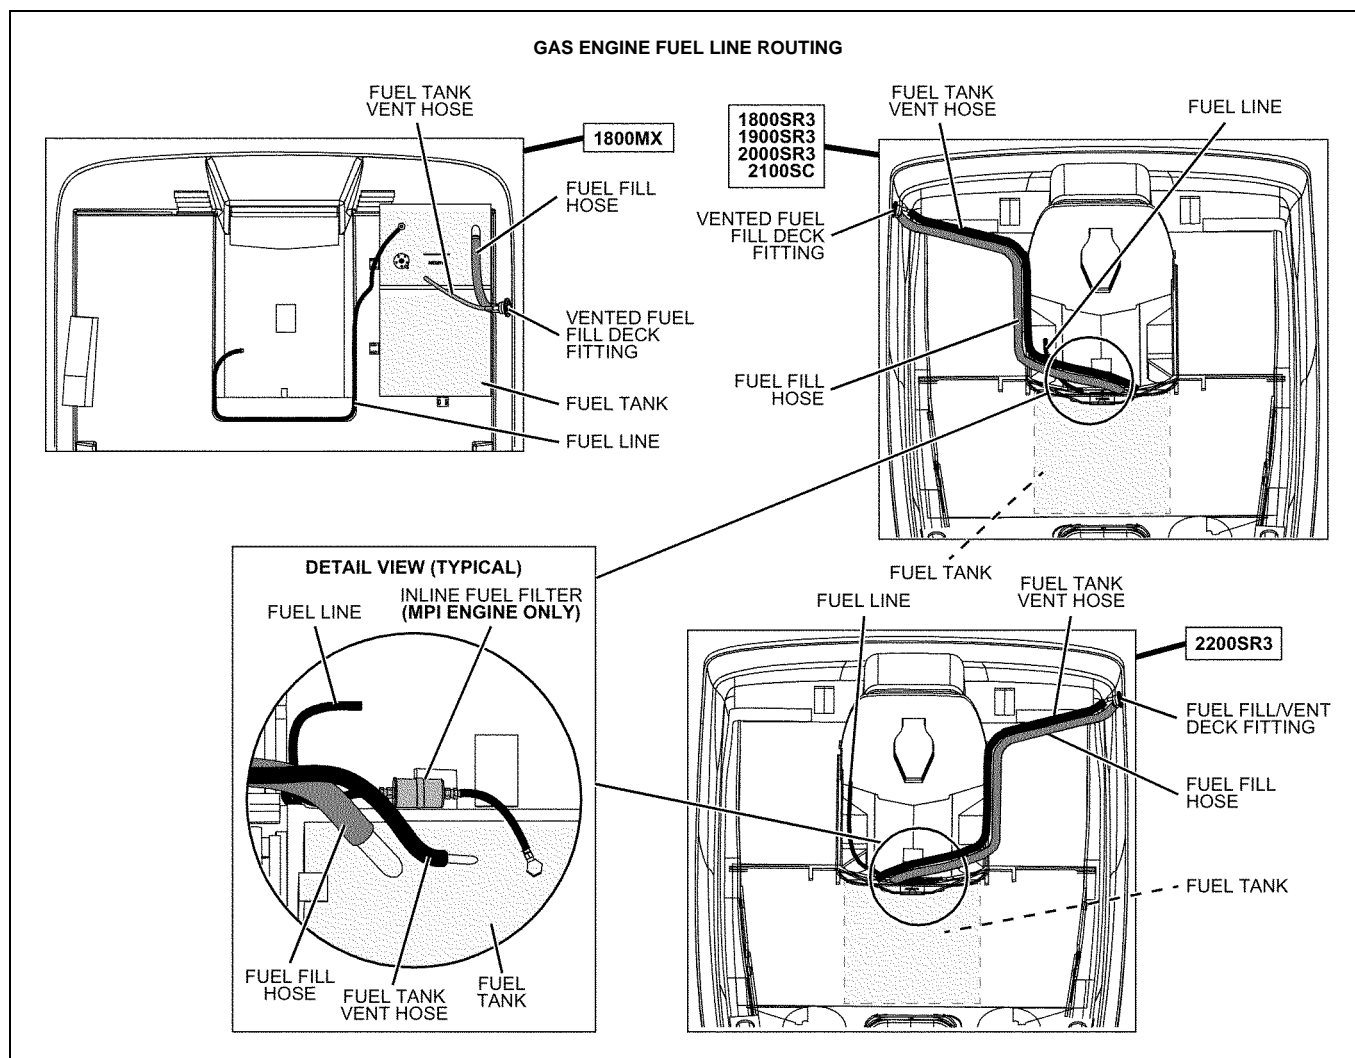

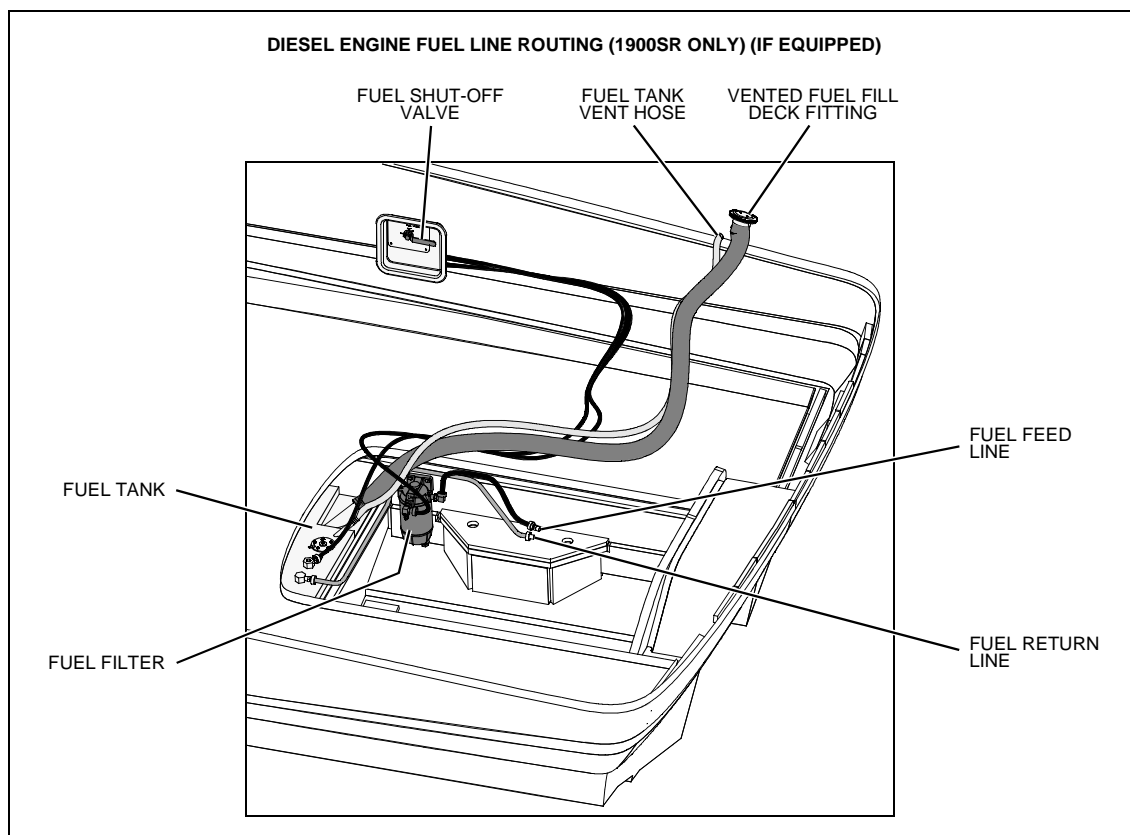

Fuel Fill & Vent

- The fuel fill/vent fitting is marked "Gas" or "Diesel".
- If you have problems filling the fuel tank, see if the fuel fill hose or fuel tank vent hose is kinked or collapsed.
- If there are no visible signs of a problem, contact your local dealer.

Anti-siphon Valve (Gas Engine Only)

NOTICE

- **If an engine running problem is diagnosed as fuel starvation, check the anti-siphon valve.**
- **If the valve is stuck or clogged, change or replace it while the engine is *shut down*.**
- ***NEVER* run the engine with the anti-siphon valve removed, except in an emergency.**

- The anti-siphon valve is a vital fuel system part.
- If the fuel line ruptures, this valve will prevent the fuel from siphoning from the tank.
- The valve is located on the fuel tank, where the fuel feed line attaches to the tank.
- The valve is spring loaded and is opened by fuel pump vacuum.

Gas Engine Fuel Filters


- The fuel pickup tube, located inside the fuel tank, is equipped with a fine mesh screen filter.
- If your boat features an MPI engine, there is an inline fuel filter on the fuel line.
- In addition, when supplied by the engine manufacturer, a fuel filter is installed on the engine.
- Periodically replace the fuel filters to make sure they remain clean and free of debris.
- Talk to your selling dealer or local marina about fuel additives that help prevent fungus or other buildup in your gas fuel tank.

Fuel Filter/Water Separator (Diesel Engine Only)

NOTICE

- **The frequency of water draining or element replacement is determined by the contamination level in the fuel.**
- **Inspect the collection bowls for water daily.**
- **Replace the elements at least once a year, or when a loss of power is noticed, whichever comes first.**

- The fuel feed line features a fuel filter/water separator.
- Service instructions for the fuel filter/water separator is provided on the filter.

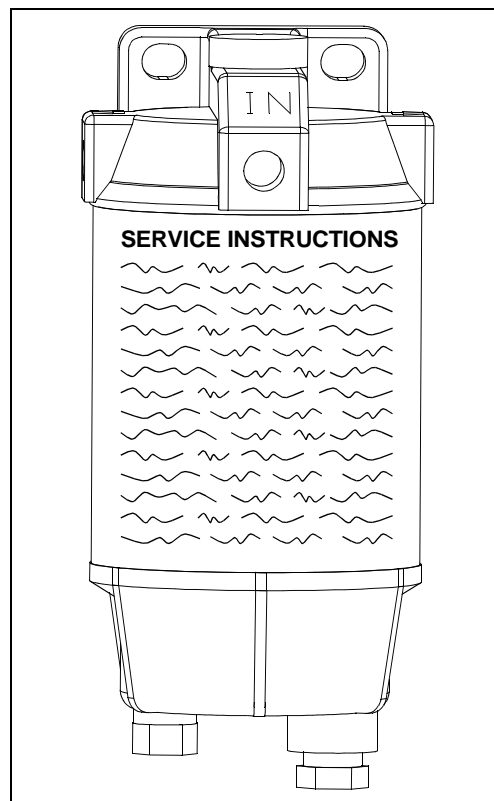


Quick Oil Drain System

The quick oil drain hose was attached to the engine oil pan at the factory. However, some minor assembly is still needed *before* you can use this system.

How to install the quick oil drain system:

1. Unscrew the factory installed garboard drain plug from the garboard drain (A). Keep the factory garboard drain plug on the boat as a spare.
2. Unclip the quick oil drain assembly from the wire loop (B) on the engine.
3. Un-clip the draw cord section (C) from the draw cord section (D).
4. Thread the draw cord section (D), the oil drain plug (E), and the oil drain hose (F) through the garboard drain (A).
5. **Adjust the hose stop clamp (G) so that no more than 12 inches of hose, including the oil drain plug, can extend out of the garboard drain (A).**
6. Re-clip the draw cord section (C) to the draw cord section (D).
7. Push the oil drain hose, oil drain plug, and both sections of the draw cords through the garboard drain and into the bilge area.
8. Screw the oil drain garboard drain plug (H) into the garboard drain (A) and tighten firmly.

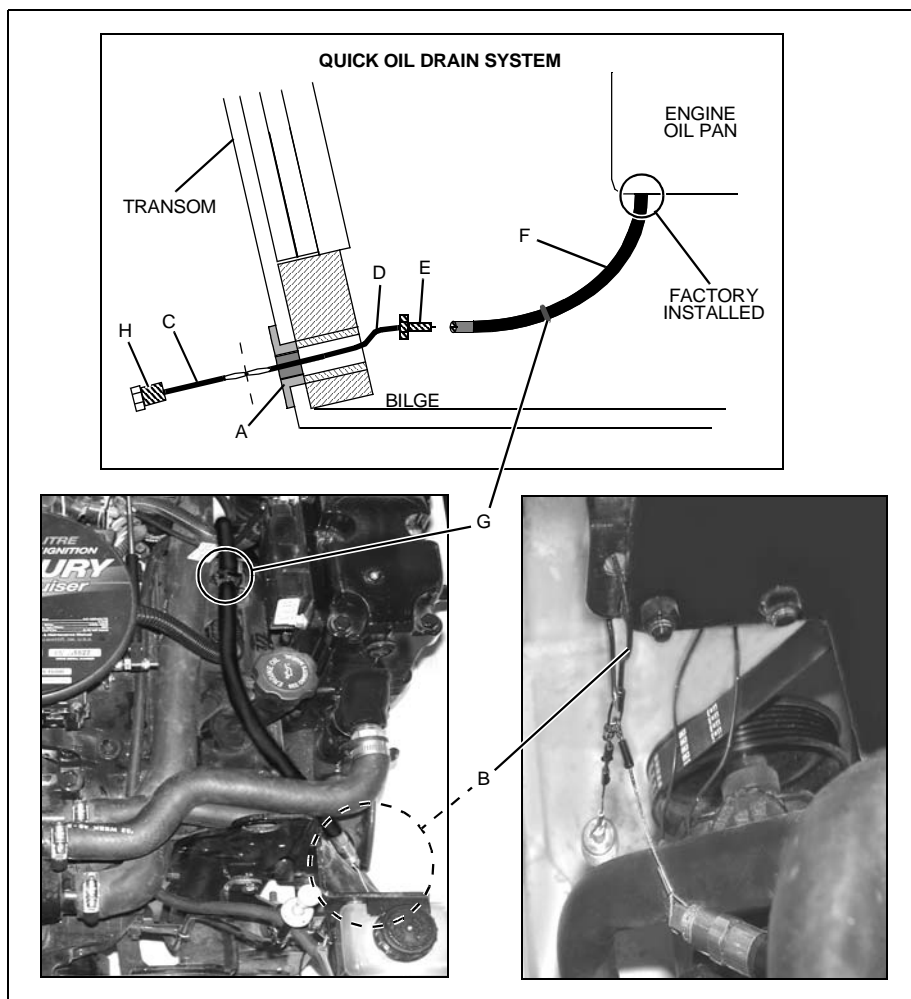

To drain the engine oil:

1. Remove the boat from the water.
2. Unscrew the garboard drain plug.
3. Pull the draw cord until the oil drain plug and the oil drain hose slide out of the garboard drain.
4. Place the end of the oil drain hose into a suitable container.
5. Unscrew the oil drain plug and drain the engine oil.
6. Replace the oil drain plug.
7. Push the drain hose back into the bilge.
8. Replace the garboard drain plug and tighten firmly.

Always dispose of waste oil in accordance with local regulations.

Fire Suppression System (If Equipped)

- The fire suppression system is designed to extinguish engine compartment fires.
- **Before** using your boat for the first time, read the fire suppression system's instruction and maintenance manual and follow **all** warnings.
- The system will discharge automatically whenever direct heat from a fire is detected in the engine compartment.
- The system can be discharged manually by pulling the T-handle (labeled "FIRE") at the helm.
- The system can **only** be discharged **once**.
- After the system is discharged it **must** be refilled and refurbished **before** it can be used again.

Chapter 5: Controls & Gauges

Steering

Rack-and-Pinion Steering System

- Your boat features a power assisted* rack-and-pinion steering system.
- For information about the 'power assist fluid reservoir', refer to the engine operation and maintenance manual.
- Boat steering is ***not*** self-centering.
- Refer to the engine manual for more steering system details.

*3.0L Carbureted engines feature mechanical rack-and-pinion steering.

Shift/Throttle Control

 WARNING!
<i>LOSS OF CONTROL HAZARD!</i>
Improper maintenance of shift/throttle hardware may cause a sudden loss of control!

- Read ***all*** of the information about the shift/throttle controls in the *Sport Boat Owner's Manual*.
- Also, read the shift/throttle controls' manual and the engine manual.

Power Trim and Tilt

- The stern drive on your boat is equipped with power trim and tilt.
- Trim and tilt instructions are provided in the engine operation manual and the shifter/throttle manual.

Gauges

Cleaning Gauges



CAUTION!

PRODUCT or PROPERTY DAMAGE HAZARD!

- Use only mild soap and water to clean the gauge lenses and bezels.
- Use of other cleaners, including common window cleaning solutions, may cause the lense to crack.
- Lenses cracked in this manner will **NOT** be covered by our warranty.

Gauge Fogging

- Moisture may occasionally find its way into the gauges causing lens fogging.
- Turning **On** the gauge lights will help dry the lenses.
- Fogging will not harm the gauges.

Radio Transmission Interference

VHF or other radio transmissions may cause brief erratic readings on the tachometer. This will not damage the tachometer gauge or affect its accuracy when **not** transmitting.

Fuel Gauge

It is normal for the pointer on your fuel gauge to bounce as fuel sloshes back and forth in the fuel tank.

Depth Finder (If Equipped)



WARNING!

- Do **NOT** use the depth finder as a navigational aid to prevent collision, grounding, boat damage or personal injury.
- When the boat is moving, submerged objects will **NOT** be seen until they are already under the boat.
- Bottom depths may change too quickly to allow time for the boat to react.
- If you suspect shallow water or submerged objects, run the boat at very slow speeds.


Chapter 6: Plumbing

Bilge Pump

NOTICE

Discharge of oil, oil waste or fuel into navigable waters is prohibited by law. Violators are subject to legal action by the local authorities.

- Your boat is equipped with a bilge pump for pumping water out of the bilge.
- The bilge pump is controlled by an automatic float switch (autofloat switch) and/or a switch at the helm.
- The bilge pump is wired directly to the battery.
- Unless the battery is dead, the pump should work even when the boat is unattended.

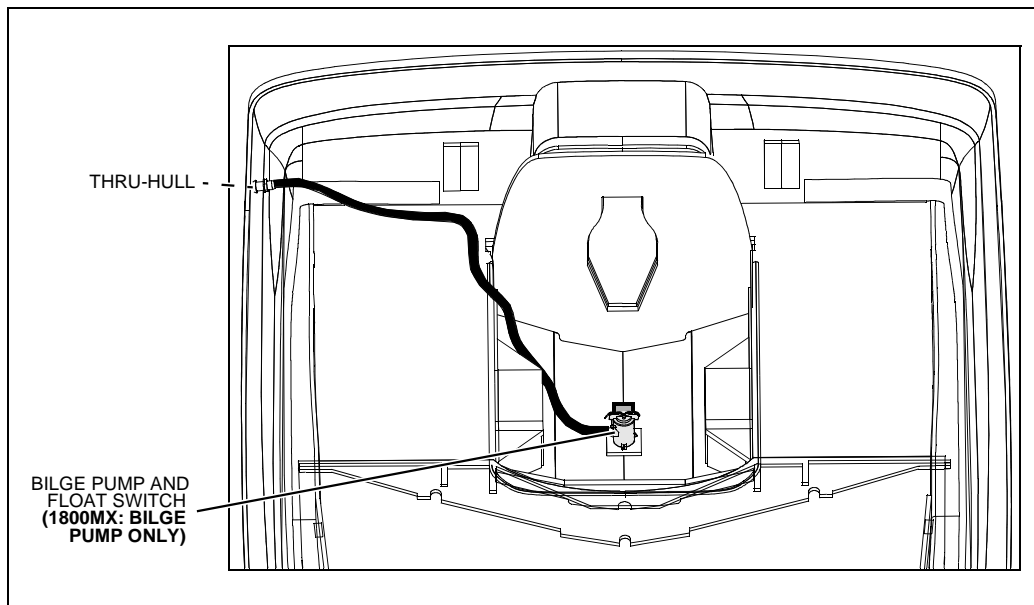

Bilge Pump Testing


- The bilge pump is vital to the safety of your boat.
- Test the bilge pump often to make sure it is working properly.

To test the bilge pump:

1. Turn **On** the bilge pump switch at the helm.
 2. Make sure that water in the bilge is pumped overboard.
- If there is water in the bilge and the pump motor is running, but *not* pumping, inspect the discharge hose for a kink or collapsed area.
 - If the discharge hose looks okay, check the bilge pump housing for clogging debris.

Checking for clogging debris:

1. Remove the pump motor from the housing:
 - a. Lift the tab while rotating the fins counter-clockwise.
 - b. Lift out the pump motor.
 - c. Clear the housing of debris.
2. Reinstall the pump motor:
 - a. Make sure the "O" ring is properly seated.
 - b. Coat the "O" ring with a light film of vegetable or mineral oil.
 - c. Align the cams on either side of the pump motor with the slots on the housing.
 - d. Press the pump motor into the housing while twisting clockwise.
3. Check the reinstallation by trying to twist the fins counter-clockwise *without* lifting the tab; the pump motor should stay in place.

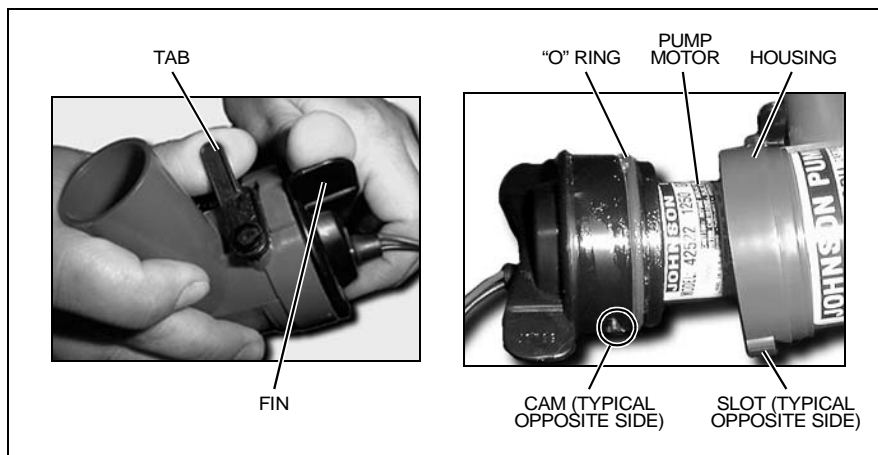


Autofloat Switch

- The automatic bilge pump uses a float (autofloat) switch to automatically turn **On** the pump whenever water rises to a preset level in the bilge.
- The autofloat switch is normally mounted next to the bilge pump it controls.
- The autofloat switch should be tested often as follows.

Autofloat testing:

1. Lift the float switch test button **up** to turn **On** the bilge pump.
 - If the pump does **not** turn **On**, check the fuse on the fuse block.
 - If the fuse is good but the switch still doesn't work, it may mean the switch is bad or possibly the battery is low.
-
2. After testing, push the test button all the way **down** to return the float switch to auto mode.

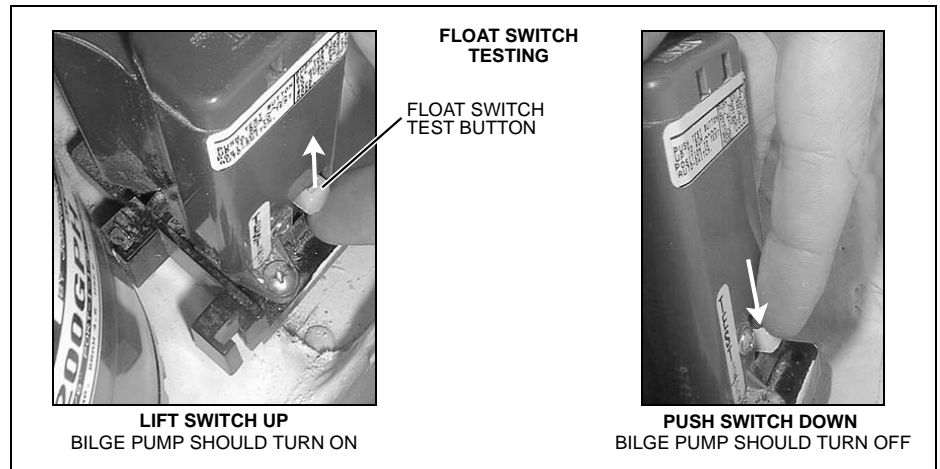

CAUTION!


When the test is completed on the float switch, you **MUST** push the test button *all the way down* to return the switch to auto mode!

Freshwater System (2200SR Only)



WARNING!

- **Only** use safe drinking (potable) water in your boat's freshwater system.
- **Only** use an FDA approved, white 'drinking water safe' hose to fill the freshwater tank.
- **NEVER** use a common garden hose for drinking water.

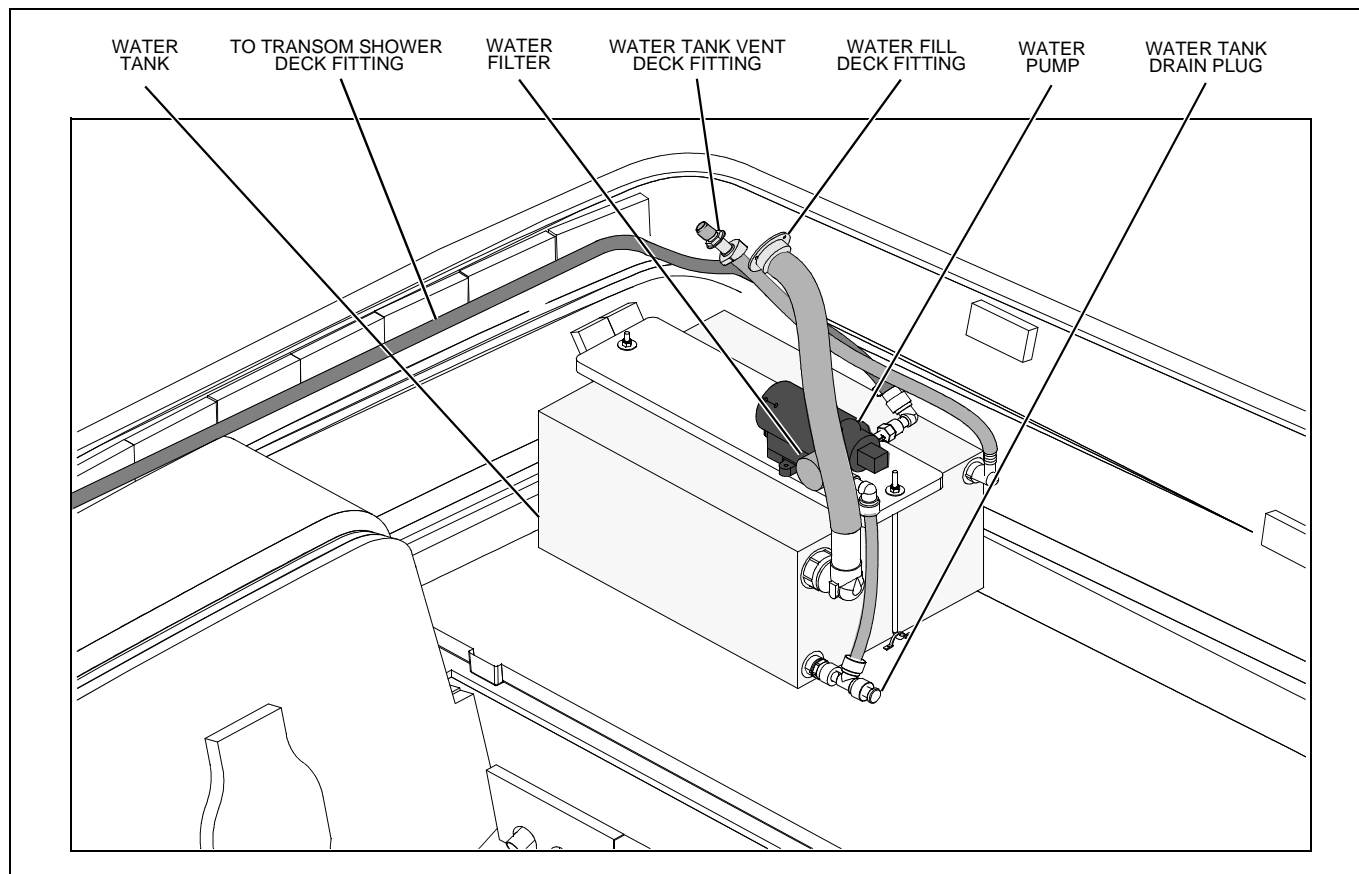

- Read the *Freshwater System* section in the *Sport Boat Owner's Manual*.
- Your boat is equipped with a pressure type (demand) freshwater (potable) system.
- Pressurize the system by turning **On** the freshwater pump switch.
- See the *Locations* section of this *Supplement* for the location of the freshwater pump switch.
- Since the freshwater pump requires DC power, the battery switch **must** also be turned **On** for the pump to work.
- Turn **Off** the freshwater pump switch when the boat is **not** in use or when the freshwater tank is empty.
- Inspect and clean the freshwater filter often (located on the freshwater pump).
- If your boat is to be left unattended for a long period of time, pump the freshwater tank dry to prevent stored water from becoming stagnant and distasteful.
- If the freshwater system needs to be disinfected, ask your dealer about treatments available for your boat's system.

Freshwater System Winterization



CAUTION!

WATER SYSTEM DAMAGE HAZARD!

NEVER blow compressed air through the freshwater system when *all* of the faucets are *Closed*.

1. Turn **On** the freshwater system switch.
2. **Open all** of the faucets and showers and let the freshwater system drain completely.
3. Turn **Off** the freshwater system switch.

All remaining water **must** be removed from the water lines. There are two ways to remove the remaining water from the lines:

- Compressed Air
- Gravity Draining


Compressed Air

You **must** have an air compressor with an air hose and an air nozzle.

1. Remove the water line from the outlet side of the freshwater pump (opposite side from filter).
2. **Open** the faucet that is furthest away from the freshwater pump.
3. Place the air nozzle against the end of the just removed water line and blow air through the system.
4. When water stops coming out of the **Open** faucet, stop the air and **Close** the faucet.
5. One at a time, repeat this process on **all** faucets and showers.

Gravity Draining

1. **Open all** faucets and showers.
2. Remove the drain plug from the tee fitting on the freshwater tank.
3. When the water has stopped draining from the freshwater tank, replace the drain plug.

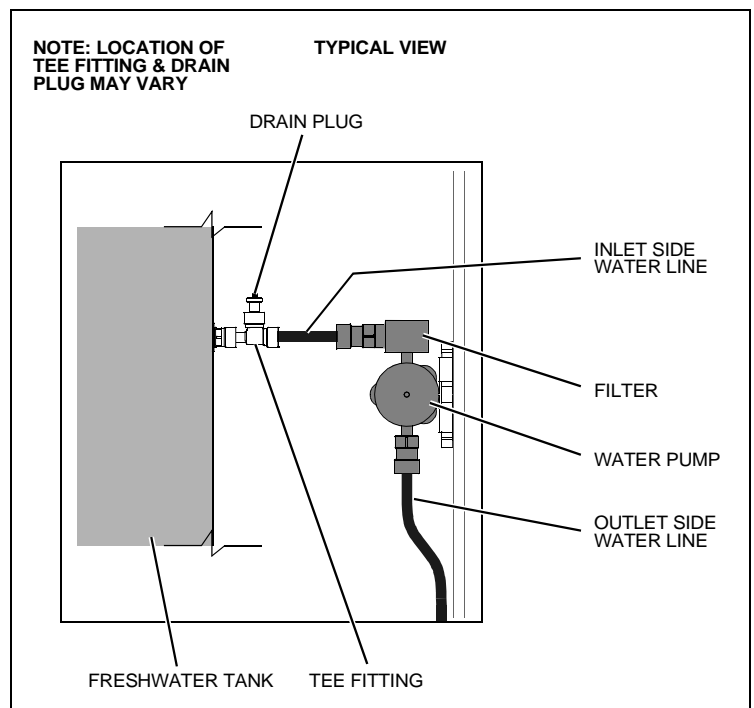

Transom Shower (2200SR Only)

- Read the manufacturer's instructions **before** using the transom shower for the first time.
- The freshwater pump switch **must** be turned **On before** using the transom shower.

Drain Systems

Deck Drains

- Water on the deck is drained overboard through the deck drains.
- Keep the deck drains free of debris.

Portable Toilet (2100SC Only) (If Equipped)


NOTICE

Check with local authorities for regulations regarding the legal use of marine head systems.

Read the manufacturer's operating instructions *before* using the portable toilet.

Portable Toilet Pump-Out (2100SC Only) (If Equipped)

- Read and follow the manufacturer's operating instructions *before* using this feature.

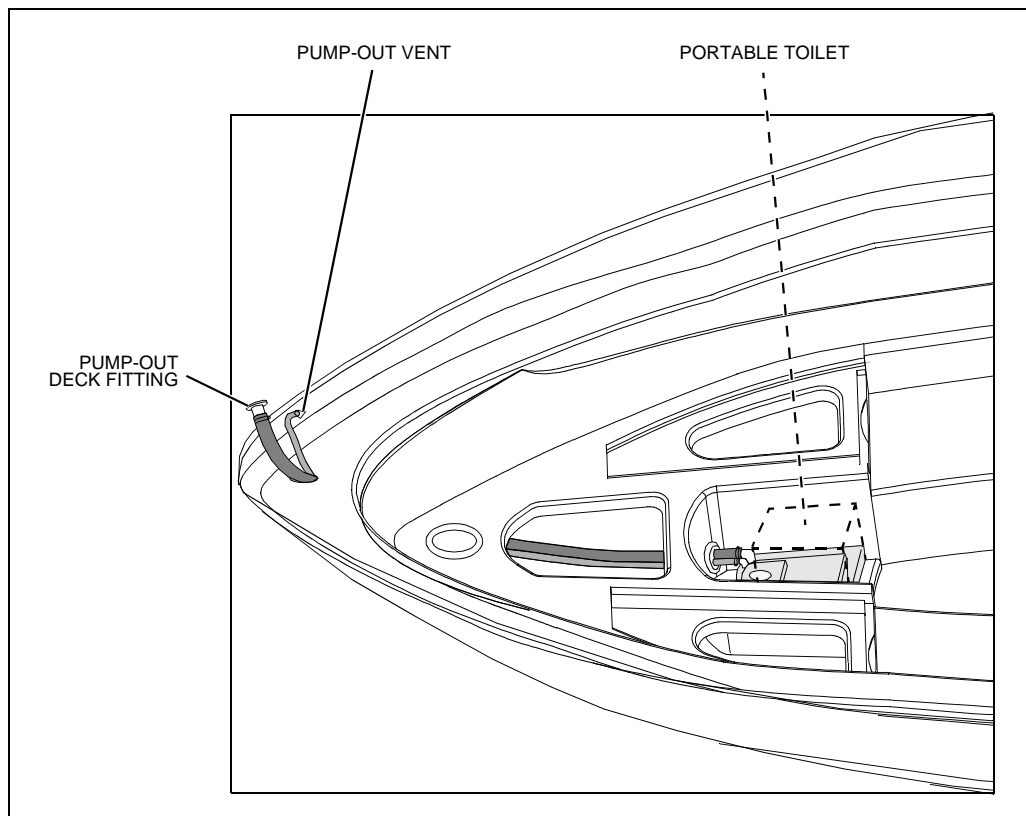

Chapter 7: Deck Equipment

Cleats and Tow Eyes

 **WARNING!**


PERSONAL INJURY and /or PRODUCT or PROPERTY DAMAGE HAZARD!

- ***NEVER*** lift the boat using the cleats, bow and stern eyes.

Carefully read the section on towing in the *Sport Boat Owner's Manual* **before**:

- Towing anything behind the boat.
- Being towed by another vessel.

Ski Tow Ring


 **WARNING!**

PERSONAL INJURY and /or PRODUCT or PROPERTY DAMAGE HAZARD!

Failure to follow these guidelines can result in injury or death:

- **Only** tow water skis, wakeboards, or recreational towables.
- **Do NOT** tow parasails, kites, or other boats.
- **Do NOT** tow more than two persons at one time.
- Use caution with skier in tow as tow rope may snap back into cockpit when released.

Attach tow rope as shown in the photo.

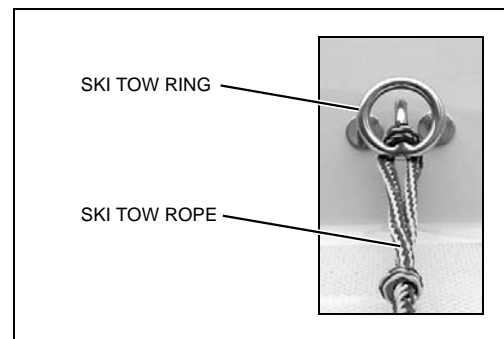

Ski-Tow Tower (If Equipped)



WARNING!



PERSONAL INJURY and /or PRODUCT or PROPERTY DAMAGE HAZARD!

Failure to follow these guidelines can result in injury or death:


- Read *all* warning labels on ski-tow tower.
- *Before* each use, make sure all bolts are in place and tight.
- *Only* tow water skis, wakeboards, or recreational towables.
- Do *NOT* exceed the following *maximum* tow weights:
1800MX model - 400 pounds
1800SR3, 1900SR3, 2000SR3 & 2200SR3 models - 600 pounds
- Do *NOT* tow parasails, kites, or other boats.
- Do *NOT* tow more than two persons at one time.
- Do *NOT* climb on, sit on, stand on, jump off or dive off tower.
- *NEVER* allow passengers to sit behind tow rope attachment point.
- Use caution with skier in tow as tow rope may snap back into cockpit when released.
- *NEVER* allow loose tow rope ends to dangle off tower.
- When tower is up, watch for low obstacles such as tree limbs, bridges, or power lines.

Attaching the Ski-Tow Rope

1. Place the ski-tow rope loop (A) over the ski-tow pylon (B).
2. Put a twist in the ski-tow rope loop (A) and place over the ski-tow pylon (B) again.

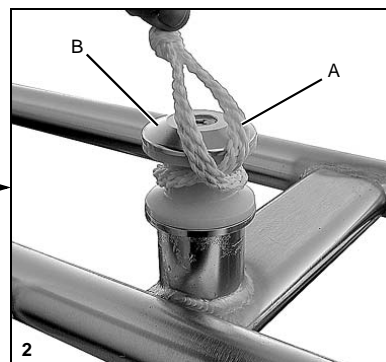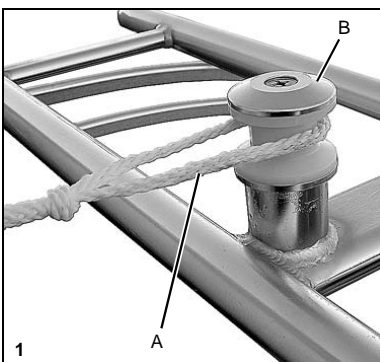

3. Pull ski-tow rope to tighten.

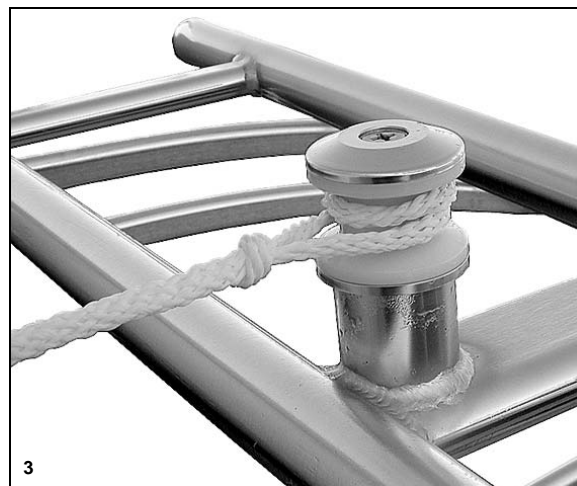

Folding The Ski-Tow Tower




WARNING!

PERSONAL INJURY and /or PRODUCT or PROPERTY DAMAGE HAZARD!


- Folding or unfolding the ski-tow tower is a two person task.
- *Before* each use of the folding ski-tow tower, make sure *all* four lock-down bolts are tightened firmly.
- Read *all* warning labels on the ski-tow tower.

To fold the ski-tow tower into the storage position:


1. Remove the lower lock-down bolt (A) on each side of the tower.

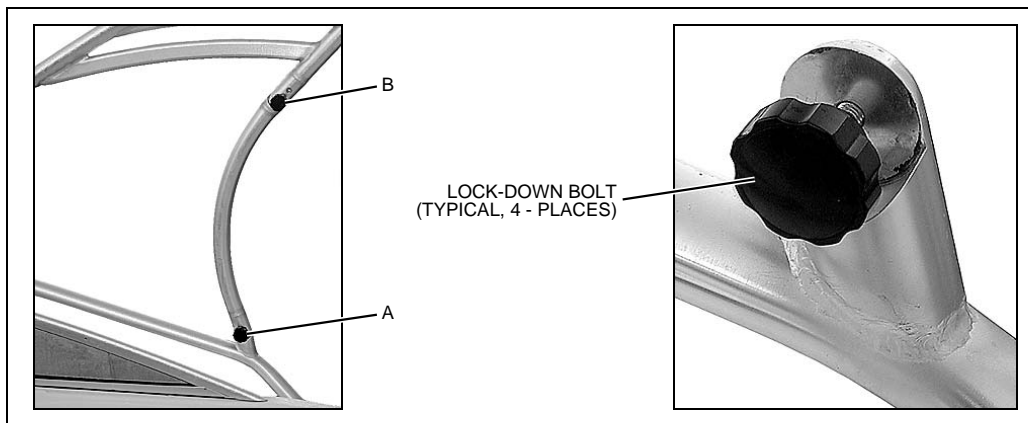

2. Carefully fold the tower forward.
3. Replace the lower lock-down bolts (A).
4. Remove the upper lock-down bolts (B).

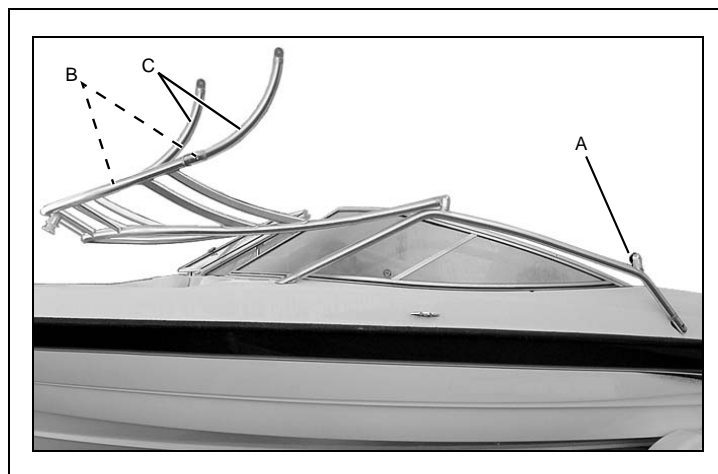

5. Lower the support legs (C).
6. Replace the upper lock-down bolts (B).

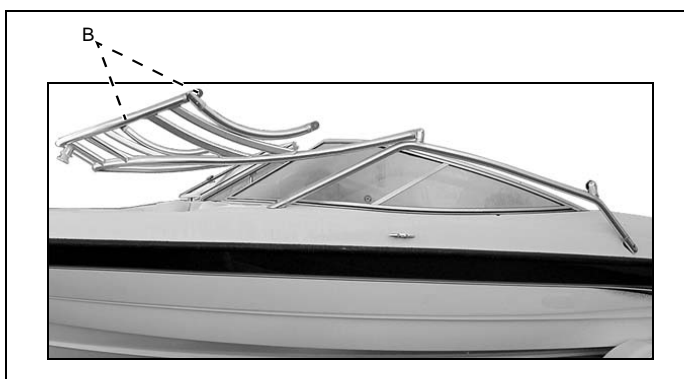

To return the tower to the towing position, perform the above steps in reverse order.

Canvas



CAUTION

PRODUCT or PROPERTY DAMAGE HAZARD!

Take down and securely stow *ALL* canvas before transporting your boat by road.

NOTICE

Two people are needed for most of the tasks listed in this section.

NOTICE


Before cleaning and/or stowing your canvas or vinyl, read the sections later in this chapter, *Canvas Care* and *Vinyl Care*.

Bow Well Cover (Bowriders Only) (If Equipped)

1. Snap the two forward snaps (A) to the deck.
2. Snap the bow cover to the entire port side.



3. On the starboard side, only snap the forward half of the bow cover to the deck.
4. Insert the adjustable, center support pole (B) into both the bow cover and the table base (C).
5. Adjust the support pole so that it is just high enough to stay inserted in the bow cover.

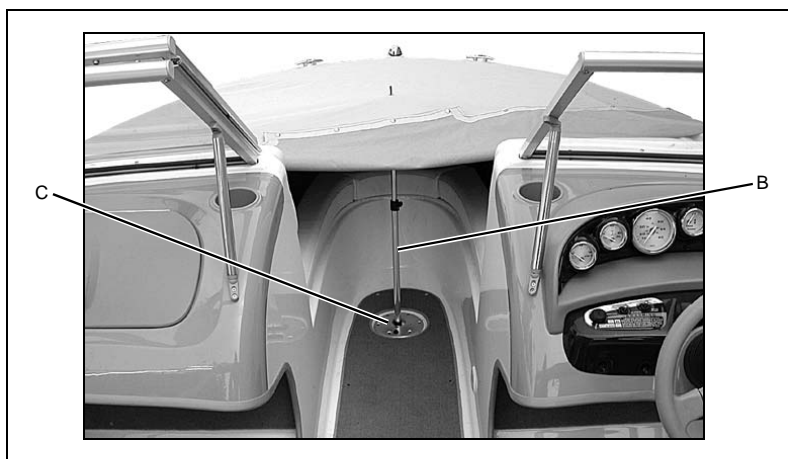



6. Snap the rest of the bow cover to the deck.
7. Adjust the support pole to take any slack out of the bow cover.



1800MX Convertible Top (If Equipped)

1. Insert the end eyes of the main bow (A) into the forward deck hinges and secure them with the pins.
 2. Insert the end eyes of the aft braces (B) into the aft deck hinges and secure them with the pins.
 3. Unfold the canvas top and pull the secondary bow (C) and the canvas forward.
 4. Open the center windshield panel and stand in the opening.
 5. Snap the snaps (D) on each side of the zipper to the first two snaps (E) on the starboard forward windshield frame.
 6. Snap the forward edge canvas snaps to the port and starboard windshield frames.
 7. Carefully close the center windshield panel and snap the remaining snaps to the center windshield frame.
 8. Align the secondary bow (C) with the center seam of the canvas by loosening or tightening the top straps (not pictured).
- The jaw slides (F) should not need to be adjusted.
 - If you decide to adjust the jaw slide positions, obtain the correct measurements from your selling dealer.
 - If other canvas (i.e. side curtains or slant back cover) is installed, the canvas top may need adjustment to align the snaps on the canvas with the snaps on the boat.

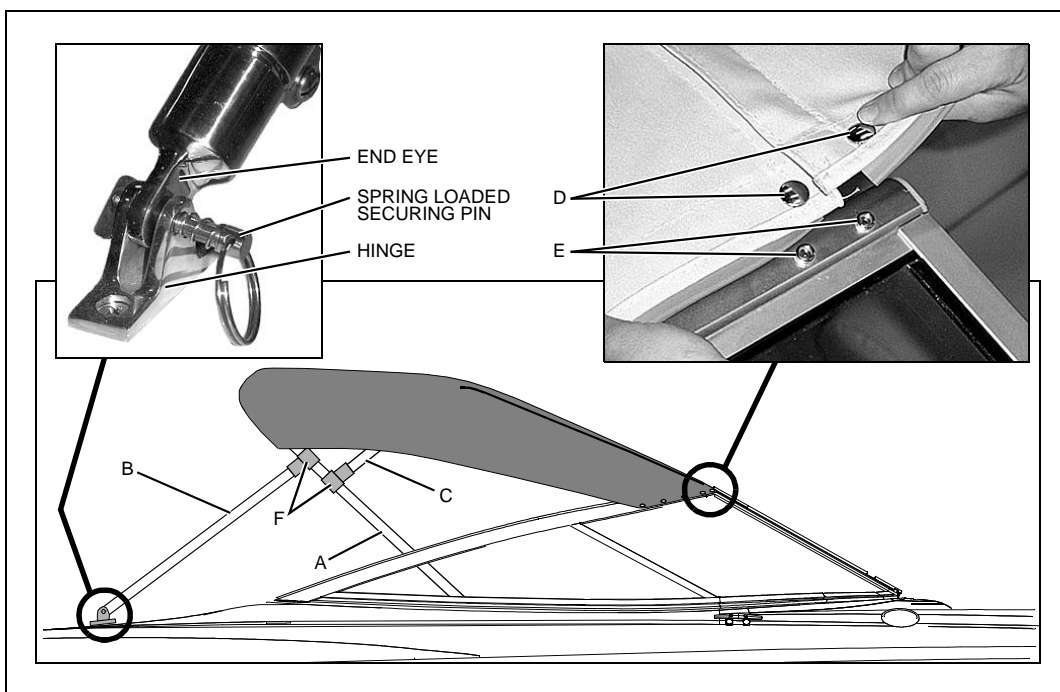

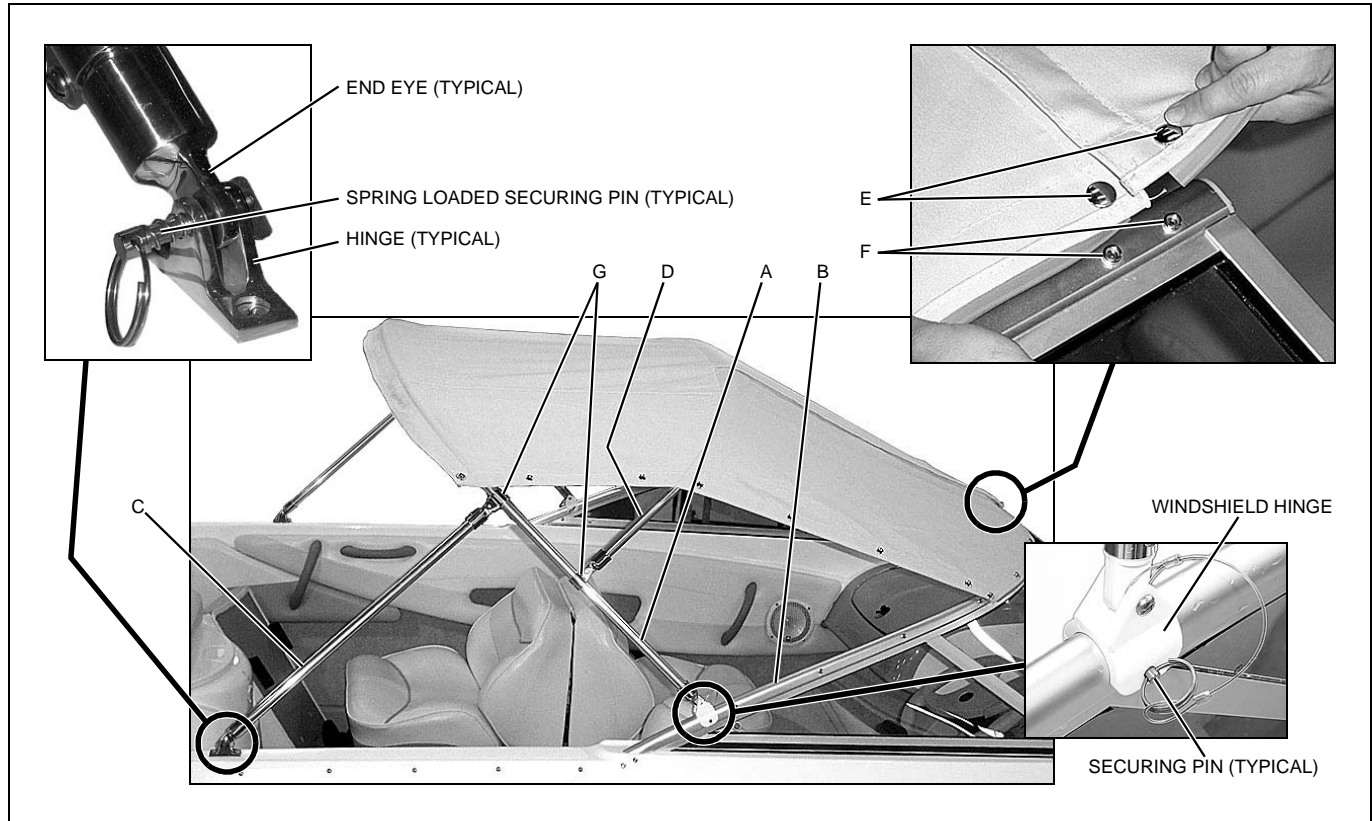
1800SR3, 1900SR3, & 2000SR3 Convertible Top (If Equipped)

1. Slide the windshield hinges of the main bow (A) over the pre-drilled hole on each side windshield frame (B) and secure with the attached pins.
 2. Insert the end eyes of the aft braces (C) into the deck hinges and secure them with the spring-loaded pins.
 3. Unfold the canvas top and pull the secondary bow (D) and the canvas forward.
 4. Open the center windshield panel and stand in the opening.
 5. Snap the snaps (E) on each side of the zipper to the first two snaps (F) on the starboard windshield frame.
 6. Snap the forward edge canvas snaps to the port and starboard windshield frames.
 7. Carefully close the center windshield panel and snap the remaining snaps to the center windshield frame.
 8. Align the secondary bow (D) with the center seam of the canvas by loosening or tightening the top straps (not pictured).
- The jaw slides (G) should not need to be adjusted.
 - If you decide to adjust the jaw slide positions, obtain the correct measurements from your selling dealer.
 - If other canvas (i.e. side curtains or slant back cover) is installed, the canvas top may need adjustment to align the snaps on the canvas with the snaps on the boat.

2100SC & 2200SR3 Convertible Top (If Equipped)

1. Slide the windshield hinges of the main bow (A) over the pre-drilled hole on each side windshield frame (B) and secure with the attached pins.
2. Hook the hold down straps (C) into the deck loops (D).
3. Unfold the canvas top and pull the secondary bow (E) and the canvas forward.
4. Open the center windshield panel and stand in the opening.
5. Snap the snaps (F) on each side of the zipper to the first two snaps (G) on the starboard windshield frame.
6. Snap the forward edge canvas snaps to the port and starboard windshield frames.

NOTE: 2100SC TOP PICTURED. 2200SR3 TOP SIMILAR.

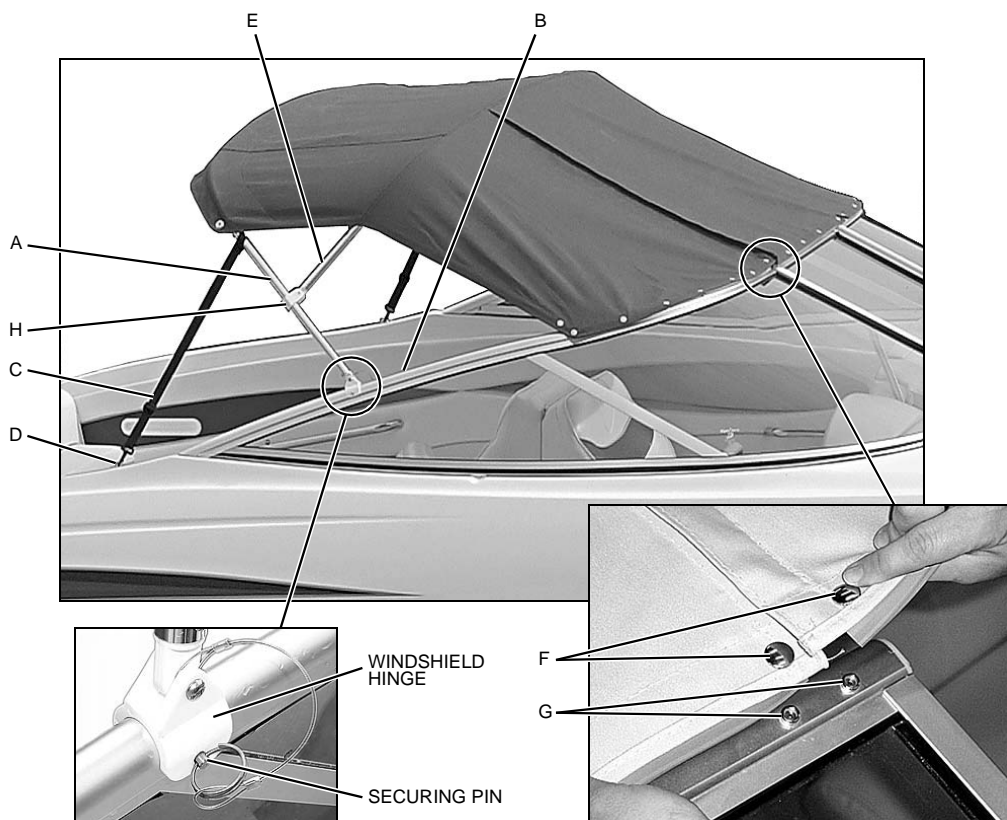

7. Carefully close the center windshield panel and snap the remaining snaps to the center windshield frame.
 8. Align the secondary bow (E) with the center seam of the canvas by loosening or tightening the top straps (not pictured).
- The jaw slides (H) should not need to be adjusted.
 - If you decide to adjust the jaw slide positions, obtain the correct measurements from your selling dealer.
 - If other canvas (i.e. side curtains or slant back cover) is installed, the canvas top may need adjustment to align the snaps on the canvas with the snaps on the boat.

Side Curtains (If Equipped)


1. Snap the forward bottom snap (A) of the side curtain to the windshield frame.
2. Snap the forward top snap (B) to the the convertible top.
3. Working your way aft, snap an upper snap to the convertible top, and then a lower snap to the windshield frame, and so on until complete.

NOTE:
PORT SIDE
SHOWN.
STARBOARD
SIDE TYPICAL.




1800MX Bimini Top (If Equipped)

1. Insert the end eyes of the main bow (A) into the deck hinges located next to the aft ends of the windshield frames and secure them with the spring loaded pins.
 2. Insert the end eyes of the aft braces (B) into the aft deck hinges and secure them with the spring loaded pins.
 3. Unfold the canvas and insert the end eyes of the forward braces (C) into the hinges located on top of the windshield frames and secure them with the spring loaded pins.
- The jaw slides (D) should not need to be adjusted.
 - If you decide to adjust the jaw slide positions, obtain the correct measurements from your selling dealer.

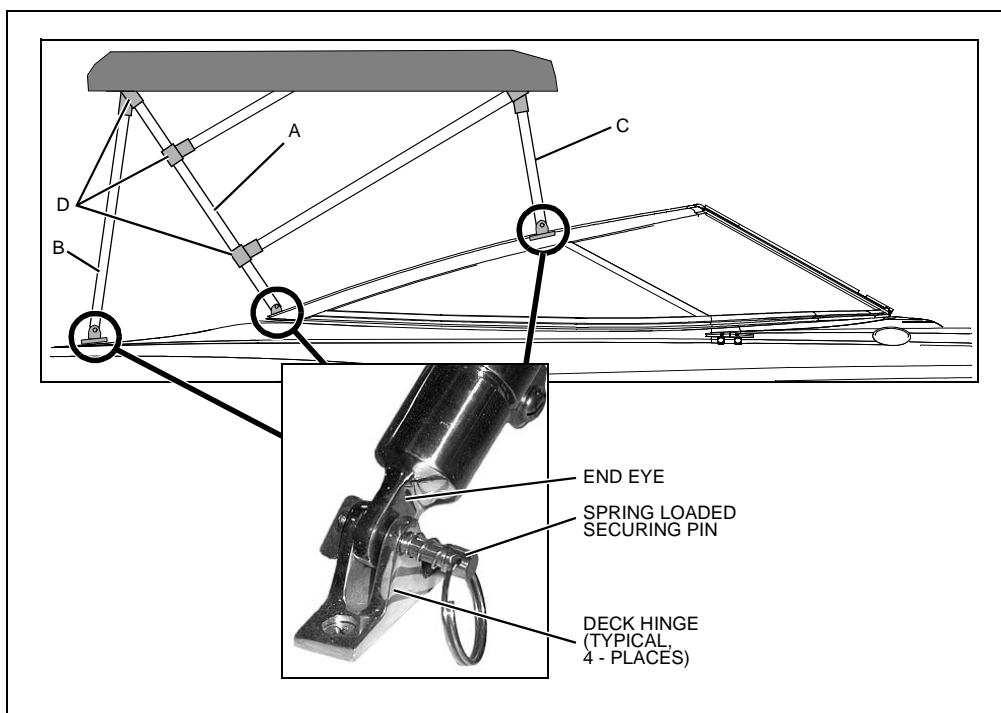**1800SR3 Bimini Top (If Equipped)**


1. Slide the windshield hinges of the main bow (A) over the holes in the side windshield frames and secure with the attached pins.
 2. Insert the end eyes of the aft braces (B) into the aft deck hinges and secure them with the spring loaded pins.
 3. Unfold the canvas and slide the end eyes of the forward braces (C) into the forward deck hinges and secure them with the spring loaded pins.
- The jaw slides (D) should not need to be adjusted.

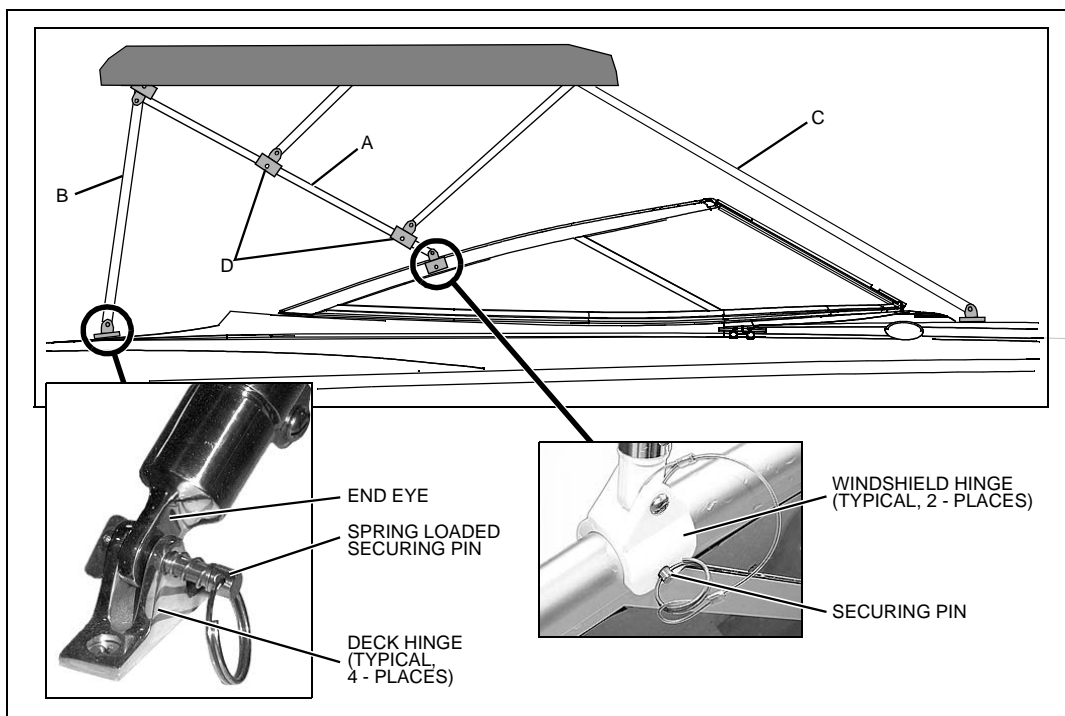


- If you decide to adjust the jaw slide positions, obtain the correct measurements from your selling dealer.

2100SC Bimini Top (If Equipped)

1. Slide the windshield hinges of the main bow (A) over the aft holes in the side windshield frames and secure with the attached pins.
 2. Hook the aft strap (B) into the deck loops (C).
 3. Unfold the canvas and slide the windshield hinges of the forward braces (D) over the forward holes in the side windshield frames and secure with the attached pins.
 4. Adjust the strap buckles (E) as needed.
- The jaw slides (F) should not need to be adjusted.
 - If you decide to adjust the jaw slide positions, obtain the correct measurements from your selling dealer.

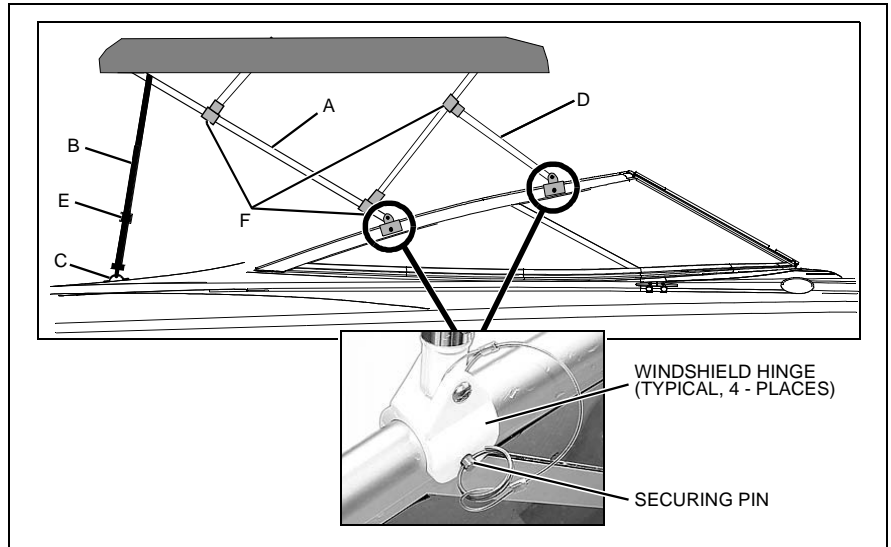**1900SR3, 2000SR3, & 2200SR3 Bimini Top (If Equipped)**

1. Slide the windshield hinges of the main bow (A) over the aft holes in the side windshield frames, and secure with the attached pins.
 2. Insert the end eyes of the aft braces (B) into the deck hinges, and secure them with the spring loaded securing pins.
 3. Unfold the canvas and slide the windshield hinges of the forward braces (C) over the forward holes in the side windshield frames and secure with the attached pins.
- Since the jaw slides (D) were preset during manufacturing they should **not** need to be adjusted.
 - However, if you think the jaw slides need to be adjusted, obtain the measurements from your selling dealer.

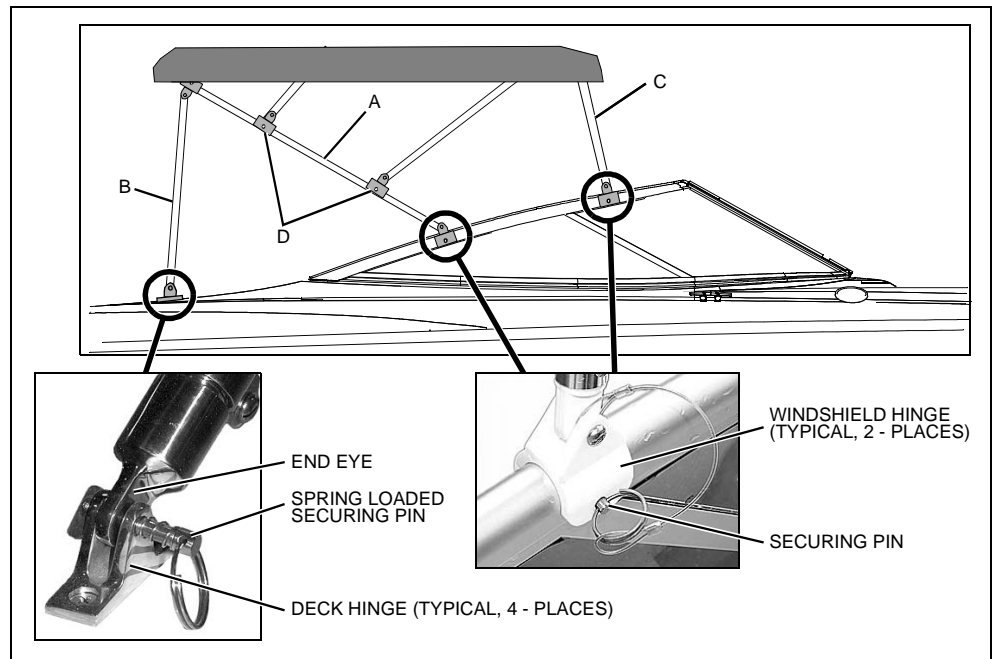

Canvas Care (see also, 'Clear Vinyl Care' on next page)

- After each use, especially in saltwater, rinse the canvas with cold freshwater.
- **Before** stowing, let the canvas air dry completely.
- The canvas can be rolled or folded for stowage.

Cleaning Canvas**CAUTION**

NEVER use detergents when washing the canvas. Detergents can destroy the water repellency, and mildew/UV resistant finish of your canvas.

Regularly clean the canvas to prevent dirt, pollen, and etc. from embedding in the fabric. Generally, it is easiest to wash the canvas while it is installed on the boat.

- Use a soft-bristled brush to remove all dust and loose dirt.
1. Hose down the canvas with freshwater.
 2. Gently wash the canvas with a solution of lukewarm water (no more than 100 F) and non-detergent soap, such as Lux or Ivory Flakes.
 3. Rinse thoroughly to remove the soap.
 4. **Before** stowing, let the canvas dry completely.

Stubborn Stains**CAUTION**

- **Soaking in bleach solutions may remove the waterproof finish of the fabric and may also decrease the life of the polyester thread used in the canvas.**
- **If necessary, a water repellent treatment should be re-applied to your canvas. Ask your dealer about the treatments available for your boat's canvas.**

Some stubborn stains may resist normal washing and you can try the following methods. However, these methods may remove the waterproof finish of the fabric and may also decrease the life of the polyester thread used in the canvas. Reapply a water repellent treatment as necessary.

Method 1

1. Add 1/8 cup (2 oz.) of **non-chlorine** bleach to one gallon of water and mix thoroughly.
2. Thoroughly wet the canvas and then gently scrub the stained area with the weak bleach solution.
3. Rinse with cold water to remove all of the solution.

Method 2

1. Add 1/2 cup (4 oz.) of **non-chlorine** bleach and 1/2 cup (4 oz.) Ivory Flakes to one gallon of water and mix thoroughly.
2. Soak the canvas in this solution for about 20 minutes.
3. Rinse with cold water to remove all of the solution.

Clear Vinyl Care



CAUTION

- **NEVER** store the clear vinyl pieces wet, as this will cause a milky film to develop.
- **NEVER** fold or crease the clear vinyl pieces as cracking will occur.
- Clear vinyl is **NOT** intended for use when the boat is in storage or being moored.
- Clear vinyl does **NOT** hold up well against ultraviolet rays.
- Under direct sunlight conditions, do **NOT** let the clear vinyl touch the framework. The framework radiates heat and can burn the clear vinyl.



- After each use, especially in saltwater, rinse the clear vinyl with cold freshwater.
- **Before** stowing, the clear vinyl must be completely dry. Air drying is best, but you can also carefully dry the vinyl with a chamois or soft cotton cloth.
- The clear vinyl can be rolled or laid out flat for stowage.
- **Never** fold or crease the clear vinyl parts as cracking will occur.

Cleaning Clear Vinyl

Regularly clean the clear vinyl to prevent dirt, pollen, and etc. from marring the surface. Generally, it is easiest to clean the clear vinyl while it is installed on the boat.

1. Hose down the clear vinyl with freshwater.
 2. Using a soft cotton cloth (**paper towels are abrasive and should never be used on clear vinyl**), gently wash the clear vinyl with soap and water.
 3. Rinse thoroughly to remove the soap.
 4. **Before** stowing, the clear vinyl must be completely dry. Air drying is best, but you can also carefully dry the vinyl with a chamois or soft cotton cloth.
- Ask your dealer about products available to keep the clear vinyl polished and looking new.

NEVER FOLD OR CREASE CLEAR VINYL!
FOLDING OR OTHERWISE CREASING
CLEAR VINYL WILL CAUSE DAMAGE
SUCH AS CRACKING TO OCCUR

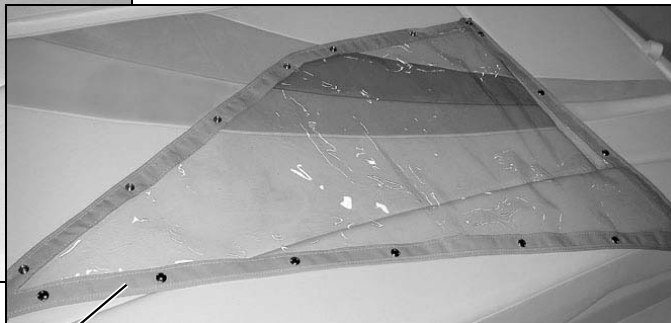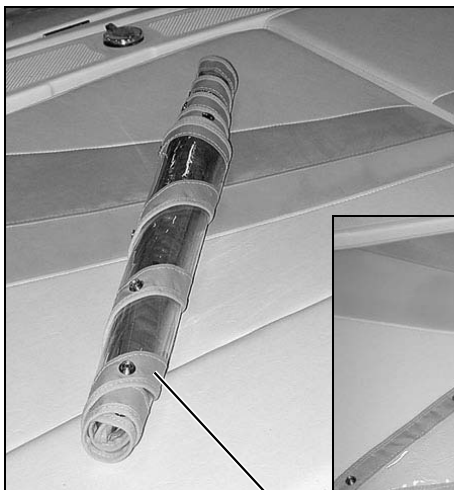

AFTER CLEAR VINYL PARTS HAVE
COMPLETELY AIR DRIED THEY CAN BE
ROLLED OR SIMPLY LAID FLAT FOR STOWAGE

Chapter 8: Entertainment Systems


Audio System

NOTICE

AM radio reception may be impaired anytime the engine is running.

Chapter 9: Convertible Seats, Beds, & Tables

Sleeper Seats (If Equipped)

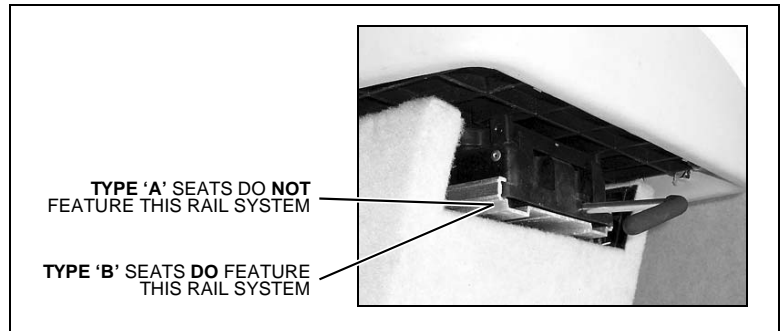

Type 'A' Sleeper Seats (If Equipped)


- These sleeper seats can be adjusted fore and aft in the upright, operating position.
- The seat bottoms adjust into backrests when the seats are in the lounge position.

Operating Positions

To slide the seat forward:

1. Lift the forward seat at point (A).
2. Push down on the forward seat at point (B) and pull the seat forward.
3. Lock the forward seat into the desired position by pushing down at point (A).
4. Lift the aft seat at point (C).
5. Push down on the aft seat at point (D) and push the seat forward until the aft seat back is flush against the forward seat back.
6. Lock the aft seat into position by pushing down at point (C).

To slide the seat aft, repeat the steps above, but start with the aft seat.

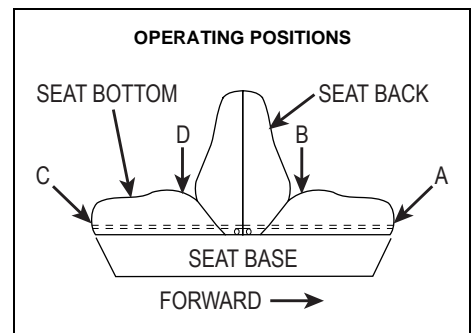


Lounge positions

To adjust into the flat lounge position:

1. Lift the forward seat at point (A).
2. Push down on the forward seat at point (B) and pull the seat forward until the seat back and bottom are flat.
3. Lift the aft seat at point (C).
4. Push down on the aft seat at point (D) and pull the seat aft until the seat back and bottom are flat.

To adjust into the chaise lounge position:

1. Lift up on the forward or aft seat bottom at point (A or C) and push the seat bottom down into the locked position.
2. To lower the seat bottom, lift the seat at point (A or C). Drop the seat bottom flat while holding the seat down at point (E).

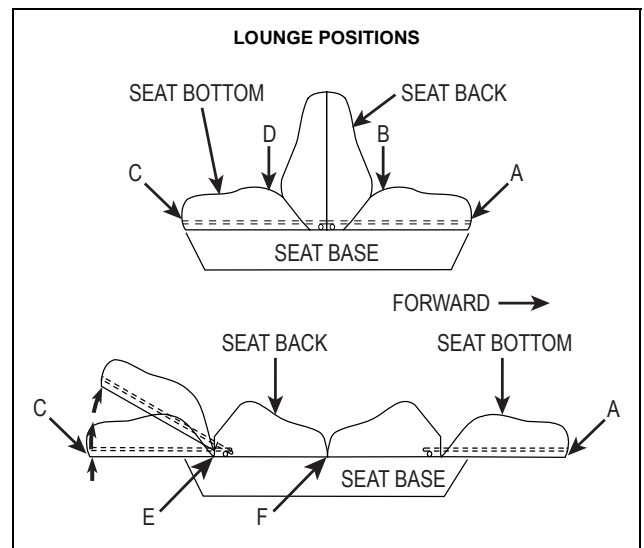

To return the seats to the operating position:

1. Lift the seat backs at point (F) and push down on the back edge of the seat bottom (B) and then seat bottom (D).
2. Push the seat bottoms towards the center of the seat until the seat backs are flush against each other and locked into place.


Type 'B' Sleeper Seats (If Equipped)

- These sleeper seats can be adjusted fore and aft in the upright, operating position.
- These sleeper seats can also be converted into a flat lounge or chaise lounge.

Operating Positions

To slide the seat forward or backward:


1. Pull up on the forward seat slider lever (A).
2. Slide the seats forward or aft to the desired position.

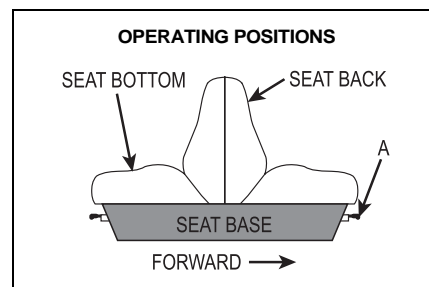

Lounge positions


To convert into a flat lounge:

1. Pull up on the forward seat slider lever (A) and slide the seats all the way forward.
2. Push down on the aft seat slider lever (B) and slide the aft seat all the way aft.
3. If necessary, push down on the top of the seat backs (C).

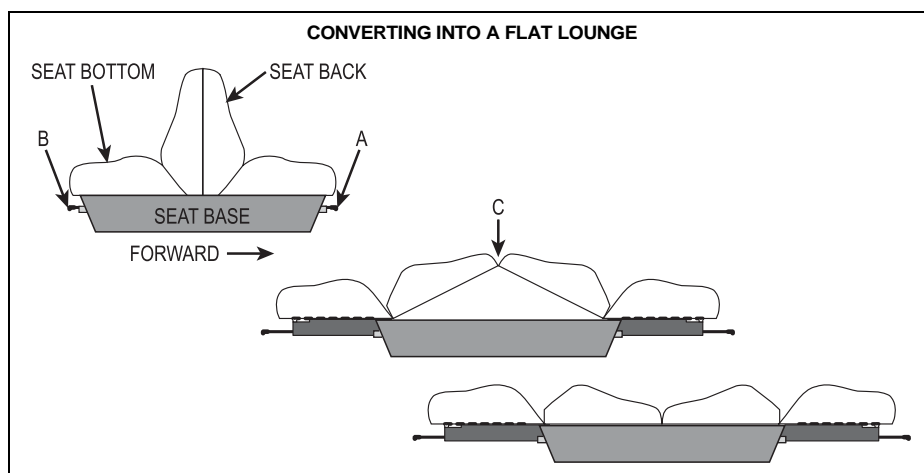


To convert into a chaise lounge:

1. First, convert the seats into a flat lounge as described above.
2. Lift the forward or aft seat bottom at point (D or E) and then lift the plastic seat support bracket (F).
3. Lower the seat until it rests securely on the support bracket.

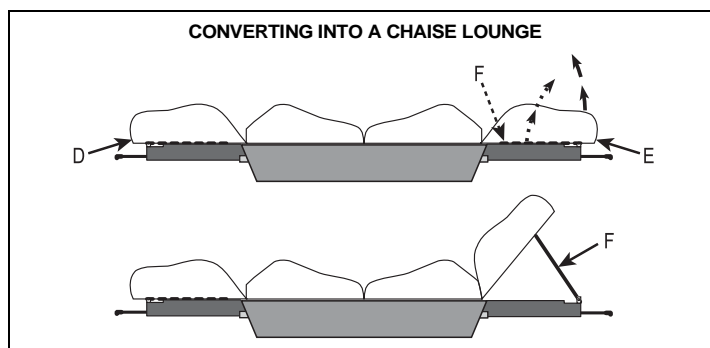


To return the seats to the operating position:

1. Lift the seat backs at point (C) and push the seat bottoms towards the center of the seat until the seat backs are flush against each other and locked into place.
2. Push the seat bottoms towards the center of the seat until the seat backs are flush against each other and locked into place.

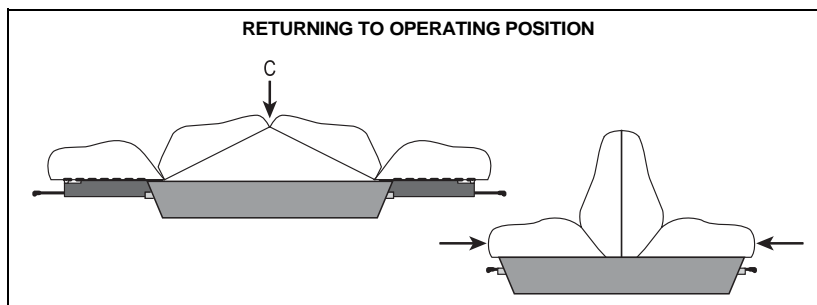


Cuddy Cabin to V-Berth Conversion (2100SC Only)


1. Place the forward filler cushion (A) over the portable toilet (B).
2. Remove the aft cushions (C).

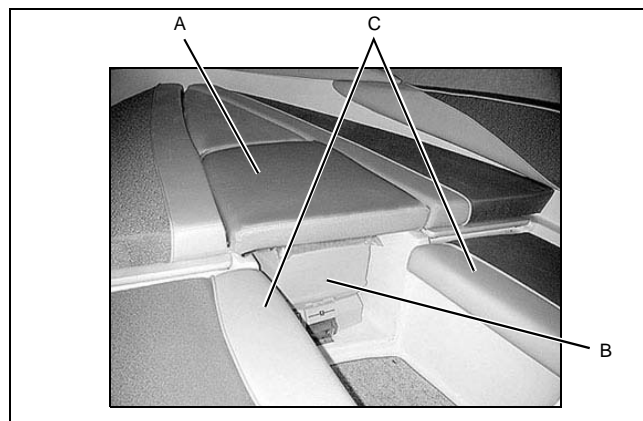


3. Lift the forward outboard cushions (D) and slide the filler boards (E) aft.

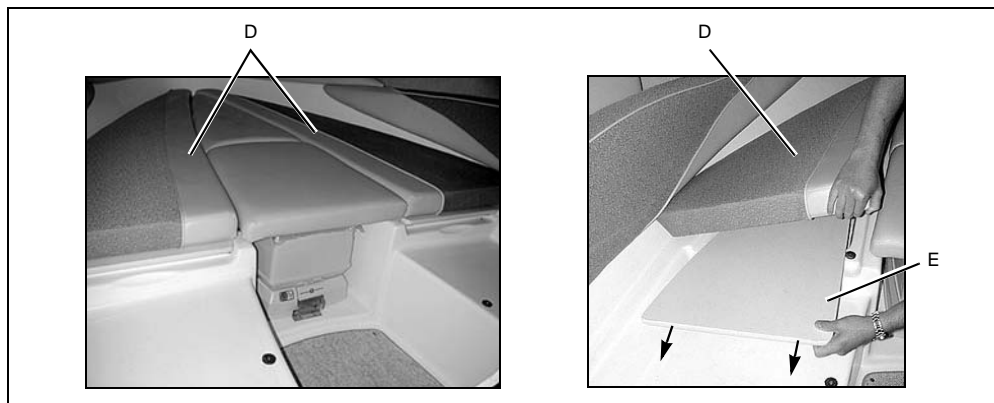


4. Align the velcro strips (F) on the underside of the filler boards with the velcro tabs (G) on the aft support lip.

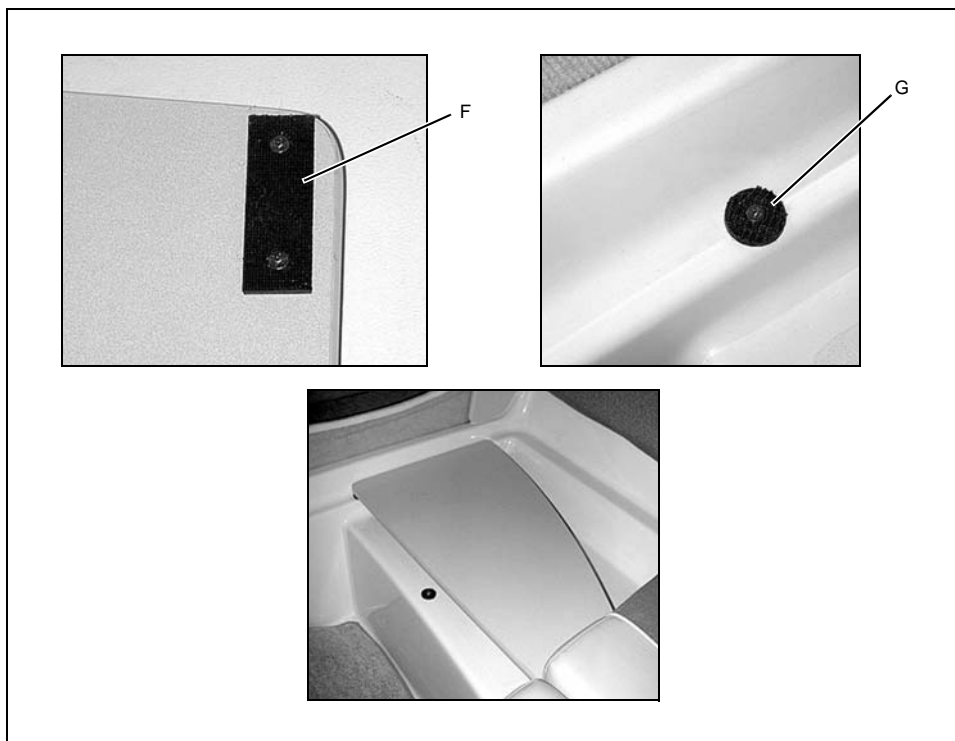

5. Place the aft cushions (C), that were removed in step two, on top of the filler boards.

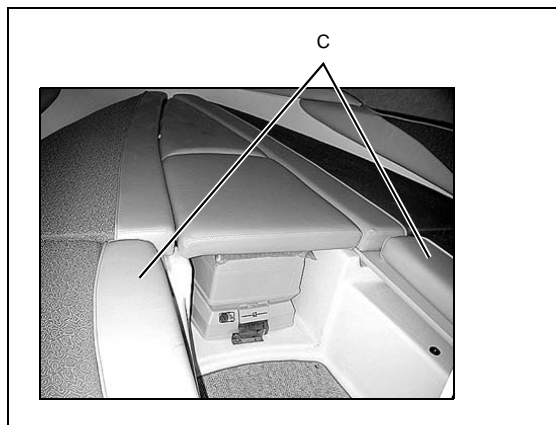

6. Insert the remaining center filler cushions (H).

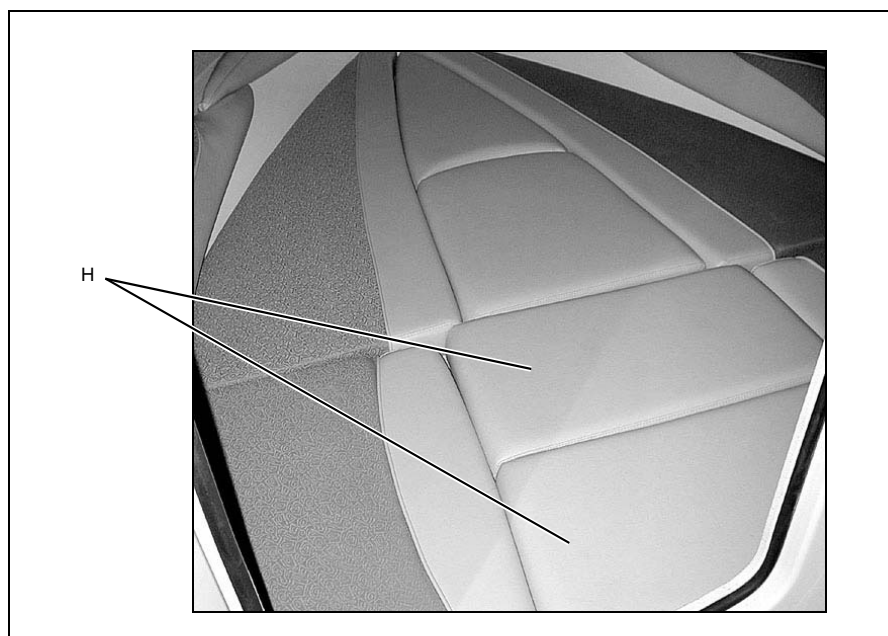

Jump Seat to Sunlounge Conversion (If Equipped)


**DANGER!**




PERSONAL SAFETY HAZARD!

Do *NOT* allow anyone to ride the aft sunlounge cushions while underway or any-time the engine is running.


1. Remove the jump seats (A) by lifting and pulling on their forward edges.

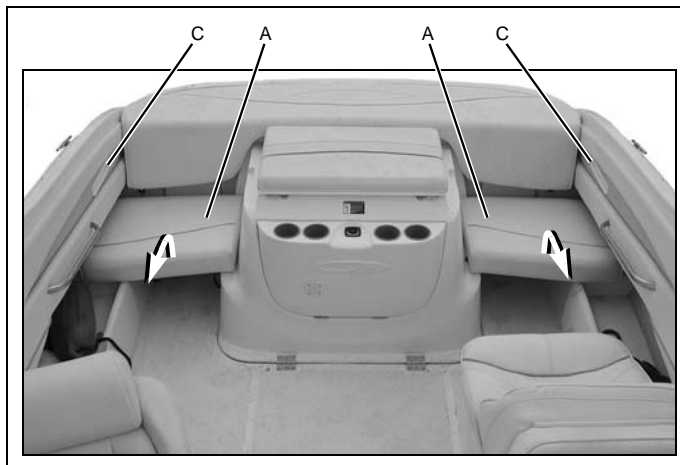


2. Rotate each jump seat so that the lounge support tabs (B) face the support slots (C).
3. Slide the lounge support tabs into the support slots.

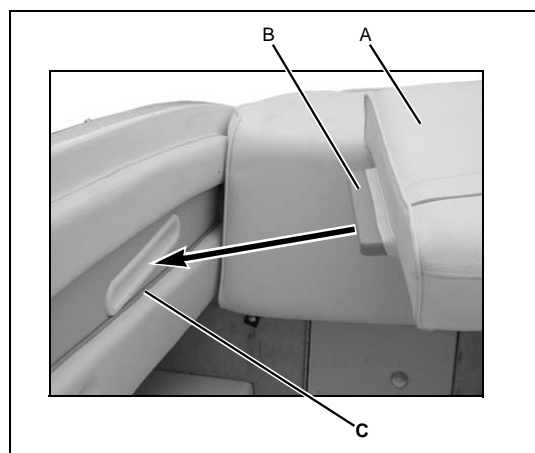


4. Press down firmly on the inboard side of each jump seat until they rest on the motor-box (D).

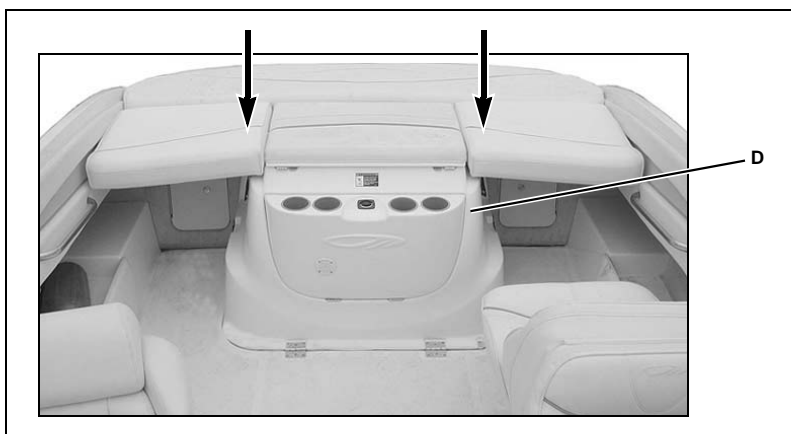


Engine Cover to Sunlounge Conversion (If Equipped)

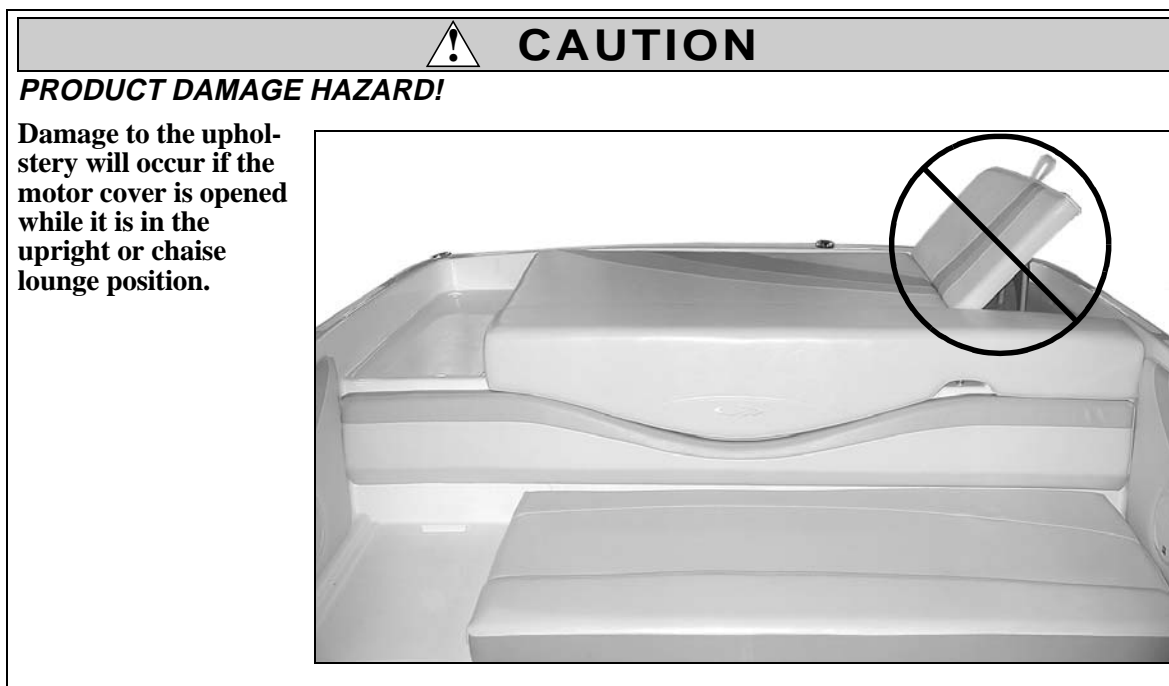

1. Pull up on the port aft corner loop (A).

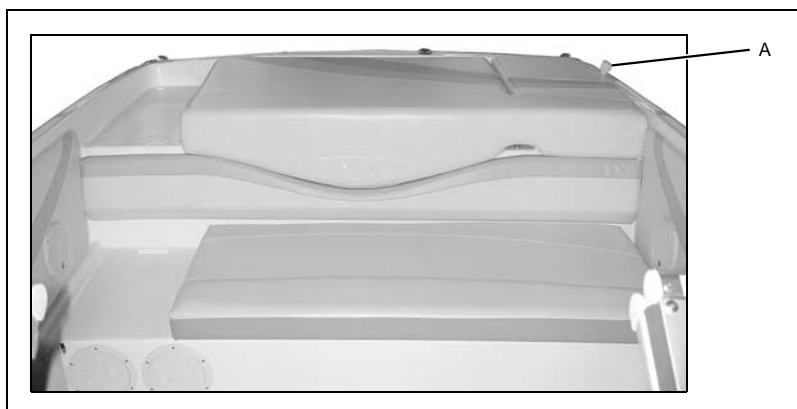

2. Place the plastic support (B) securely in the first notch (C) for an upright position or in the second notch (D) for a chaise lounge position.

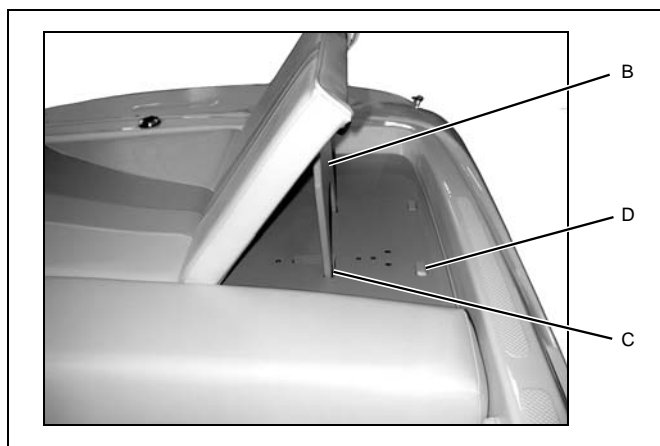

Chapter 10: Lights

Care and Maintenance

All of the lights installed on your boat are of top quality, but you should be aware that failure may periodically occur for a variety of reasons:

1. There may be a blown fuse - *replace the fuse.*
2. The bulb may be burned out - *carry spare bulbs for replacement.*
3. A wire may be damaged or may have come loose - *repair as required.*
4. The bulb base may be corroded - *clean the base and coat it with non-conductive electrical lubricant.*

Interior & Exterior Lights



CAUTION

- Be conservative in the use of battery power.
- Prolonged use of cabin interior lights (overnight) *will* result in a drained battery.

- The lights are powered by the boat's 12-volt DC system.
- The battery switch ***must*** be turned ***On*** for the lights to work.

Navigation Lights



CAUTION

Avoid the storage of gear where it would block navigation lights from view.

Read the navigation light section in the *Sport Boat Owner's Manual*.

Chapter 11: Electrical System



DANGER!









EXTREME FIRE, SHOCK & EXPLOSION HAZARD!


- To minimize the risks of fire and explosion, *NEVER* install knife switches or other arcing devices in the fuel compartments.
- NEVER* substitute automotive parts for marine parts. Electrical, ignition and fuel system parts were designed and manufactured to comply with rules and regulations that minimize risks of fire and explosion.
- Do *NOT* modify the electrical systems or relevant drawings.
- Have qualified personnel install batteries and/or perform electrical system maintenance.
- Make sure that *all* battery switches are turned *Off* before performing any work in the engine spaces.


WARNING!


1



2

4 min

3


FIRE & EXPLOSION HAZARD!

- Fuel fumes are heavier than air and will collect in the bilge areas where they can be accidentally ignited.
- Visually and by smell (sniff test), check the engine and fuel compartments for fumes or accumulation of fuel.
- ALWAYS* run the bilge blower(s) for at least four minutes prior to engine starting, electrical system maintenance or activation of electrical devices.
- Minimize the danger of fire and explosion by *NOT* exposing the batteries to open flame or sparks. *NEVER* smoke anywhere near the batteries.


CAUTION



SHOCK & ELECTRICAL SYSTEM DAMAGE HAZARD!
 When the engine is running, *NEVER* turn *Off* the battery switch or disconnect the battery cables. Doing either could cause damage to your boat's engine and/or electrical system components.

NOTICE


Electrical connections are prone to corrosion. To reduce corrosion caused electrical problems, keep *all* electrical connections clean and apply a spray-on protectant that is designed to protect connections from corrosion.


12-Volt DC System

Battery


The battery supplies electricity for lights, 12-Volt accessories, and engine and generator starting. The Electrical section of Chapter 8, in the *Sport Boat Owner's Manual*, provides battery care and maintenance instructions.

Battery Switch (If Equipped With Two Batteries)

**CAUTION**

**SHOCK & ELECTRICAL SYSTEM DAMAGE HAZARD!**
When the engine is running, *NEVER* turn *Off* the battery switch or disconnect the battery cables. Doing either could cause damage to your boat's engine and/or electrical system components.

- "Stand-by Loads", such as the automatic bilge pump, and the stereo memory, are *not* affected by the battery switch. Stand-by loads bypass the battery switch and are wired directly to the battery.
- Turn the battery switch to the *Off* position whenever the boat will be unoccupied for long periods of time.

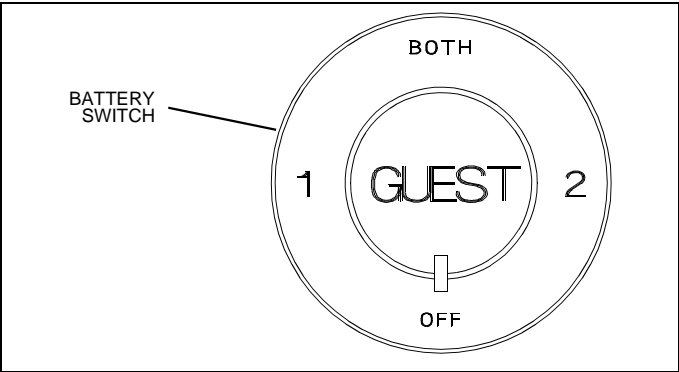

Battery Switch Positions

NOTICE

Since your boat's batteries were installed by your dealer, the battery switch positions listed below may vary. Make sure your selling dealer fully explains how to use the battery switches.

BATTERY SWITCH POSITIONS	ENGINE STARTING	ACCESSORIES & LIGHTS	ENGINE ALTERNATOR
POSITION "1"	Battery <u>1</u> Provides Starting Power	Battery <u>1</u> Provides Power for Accessories and Lights	Charges Battery <u>1</u>
POSITION "2"	Battery <u>2</u> Provides Starting Power	Battery <u>2</u> Provides Power for Accessories and Lights	Charges Battery <u>2</u>
"BOTH" POSITION	<u>BOTH</u> Batteries Provide Starting Power	<u>BOTH</u> Batteries Provide Power for Accessories and Lights (not advised unless engine is running)	Charges <u>BOTH</u> Batteries

Fuses

- Fuses for the engine and main accessory power are on the fuse block under the helm dash.
- Some equipment may have secondary fuse protection at the unit, or at the battery.

12-Volt Accessory Outlet(s)

 CAUTION
Do <i>NOT</i> use the 12-volt accessory outlet with a cigarette or cigar lighter. High temperatures may melt the outlet.


- Your boat is equipped with one or more 12-volt accessory outlets.
- The outlet(s) can be used with any 12-volt device which draws 15 amps or less.
- Each 12-volt accessory outlet is protected by a 15 amp fuse on the DC breaker panel.

Alternator


The alternator will keep the battery properly charged when the engine is running at cruising speeds.


Electrical Routings

1800MX Deck Electrical Harness

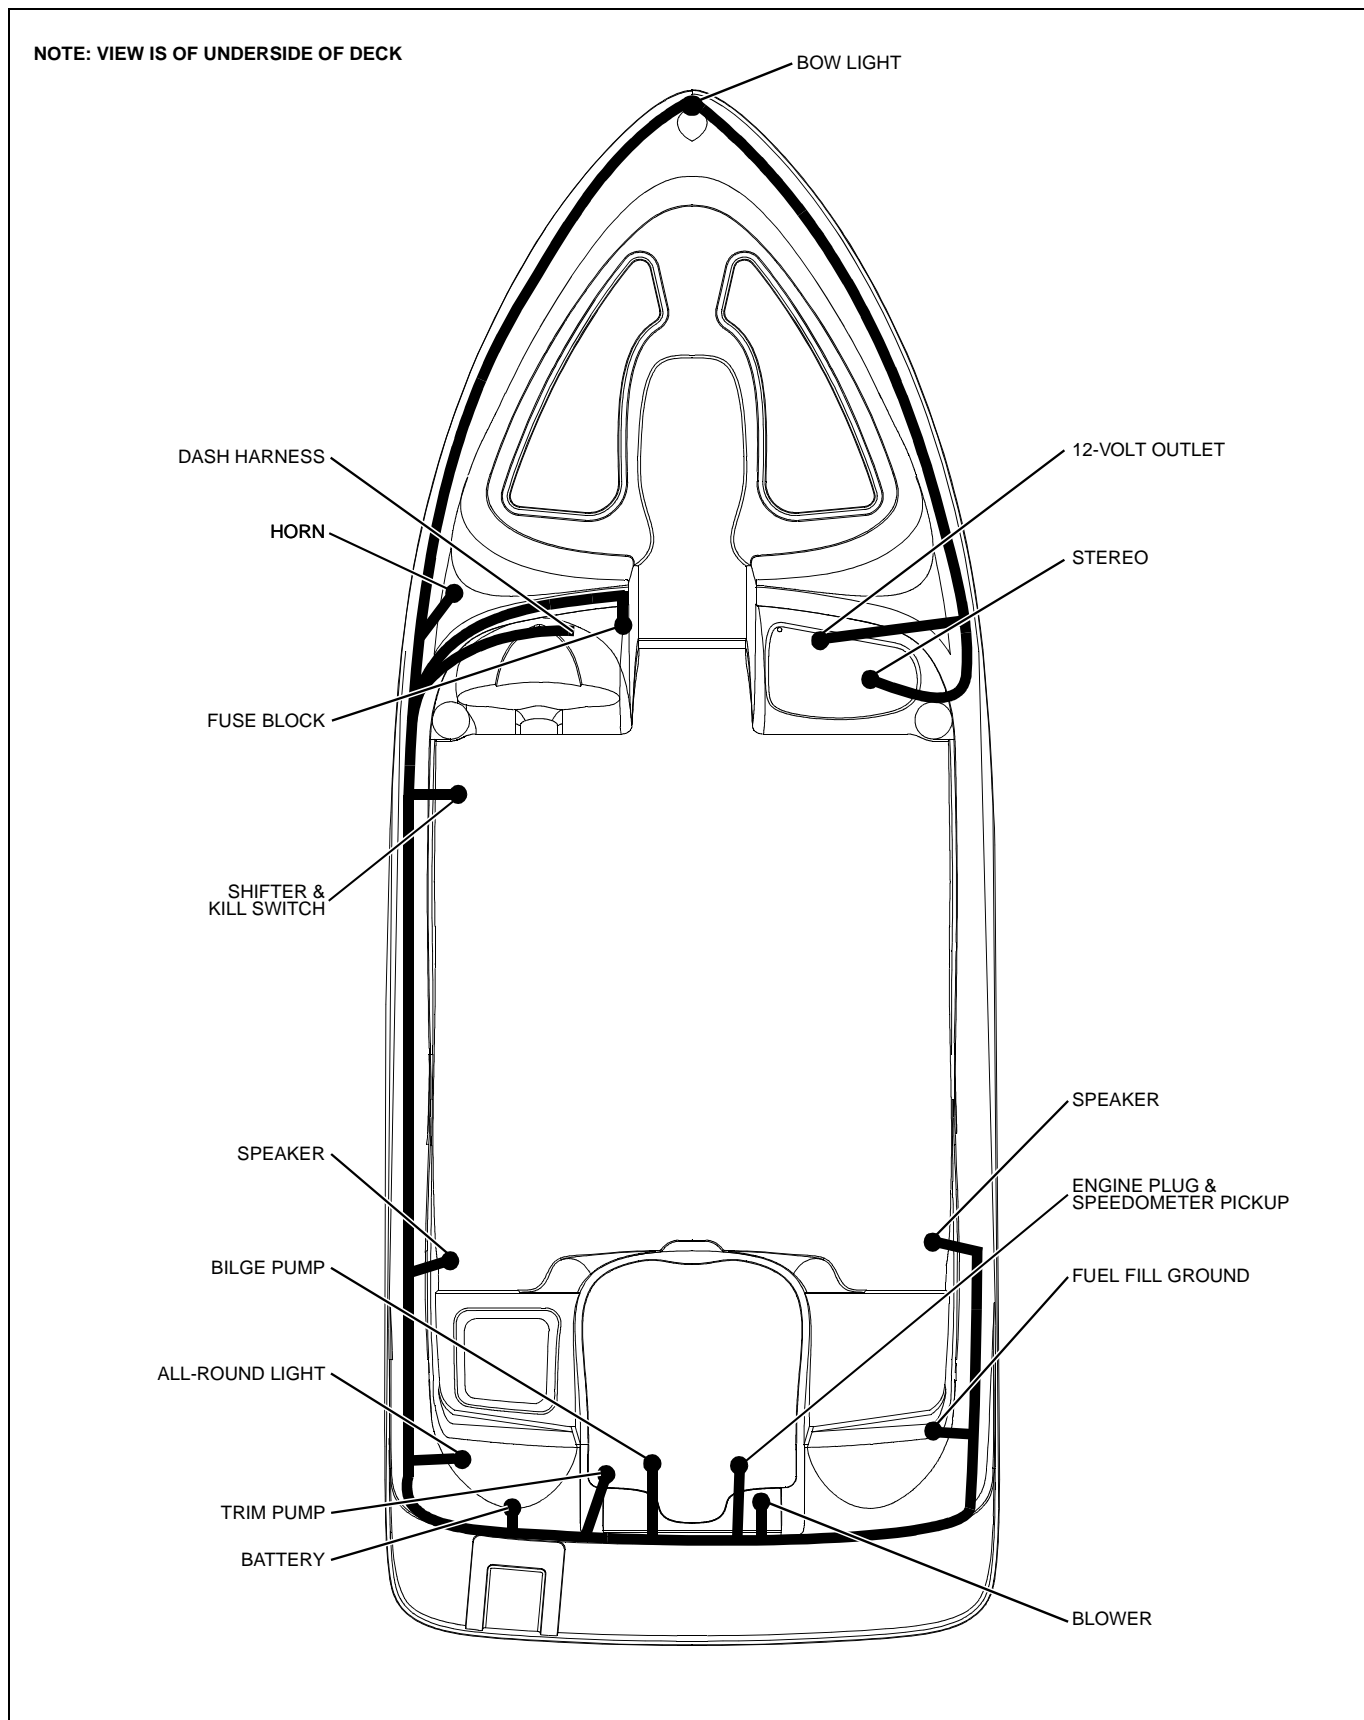


1800SR3, 1900SR3 and 2000SR3 Deck Electrical Harness

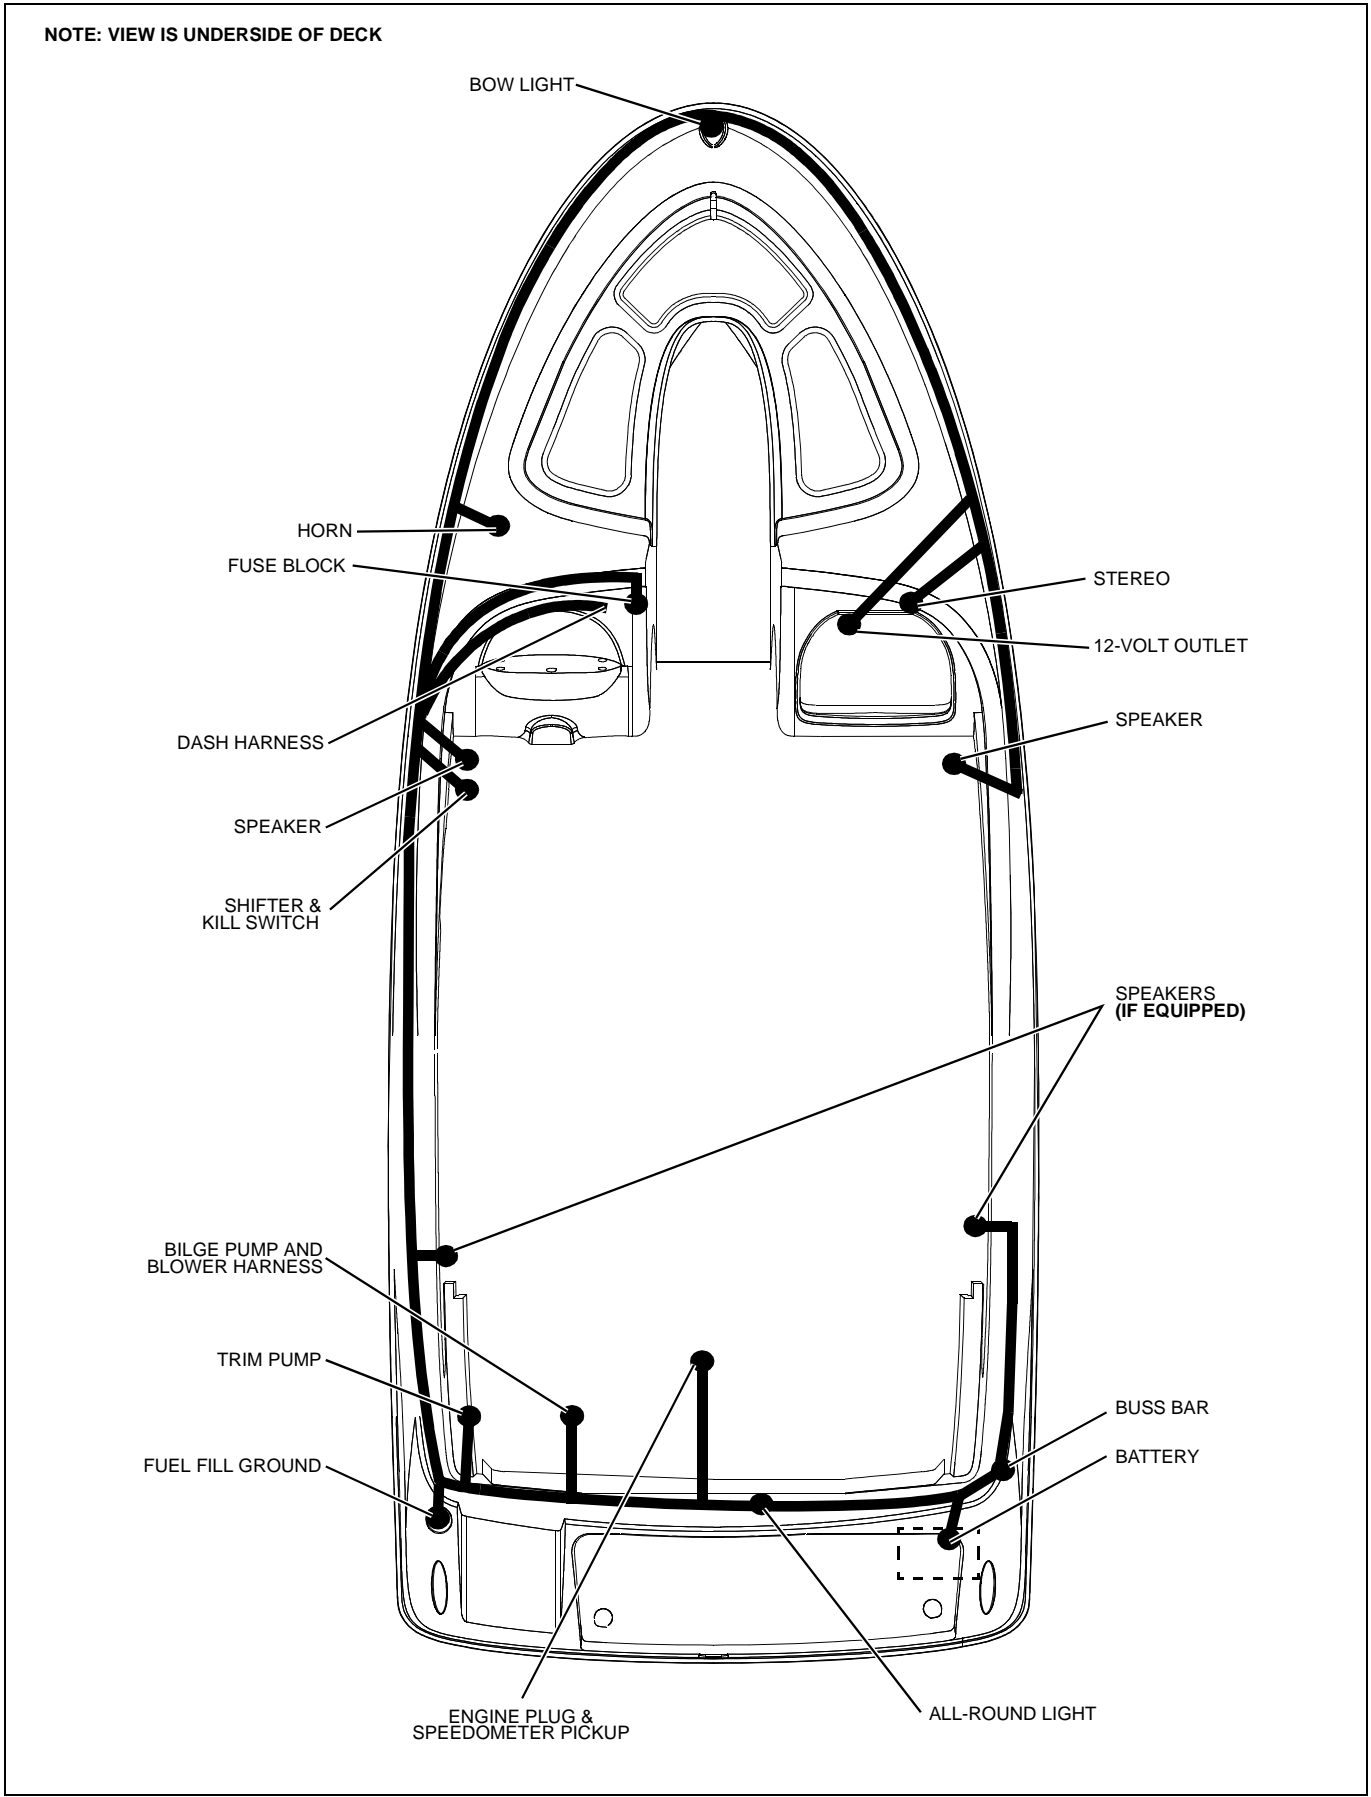

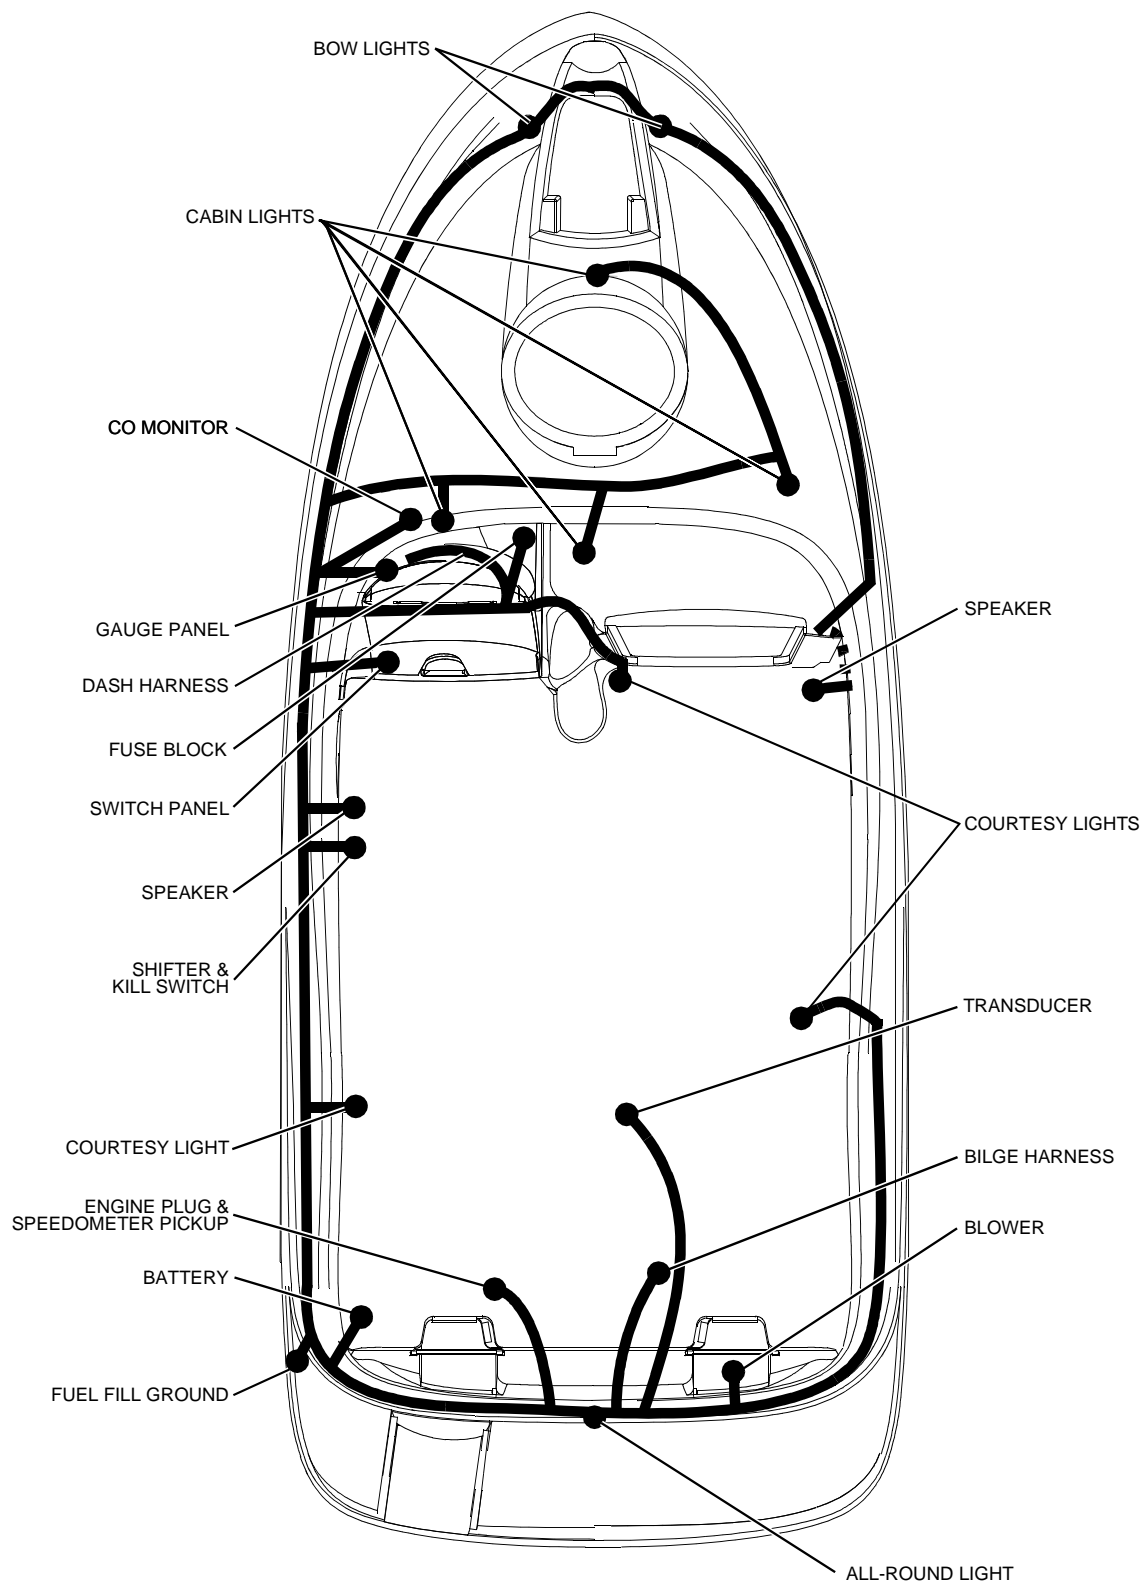
2100SC Deck Electrical Harness**NOTE: VIEW IS UNDERSIDE OF DECK**

2200SR3 Deck Electrical Harness

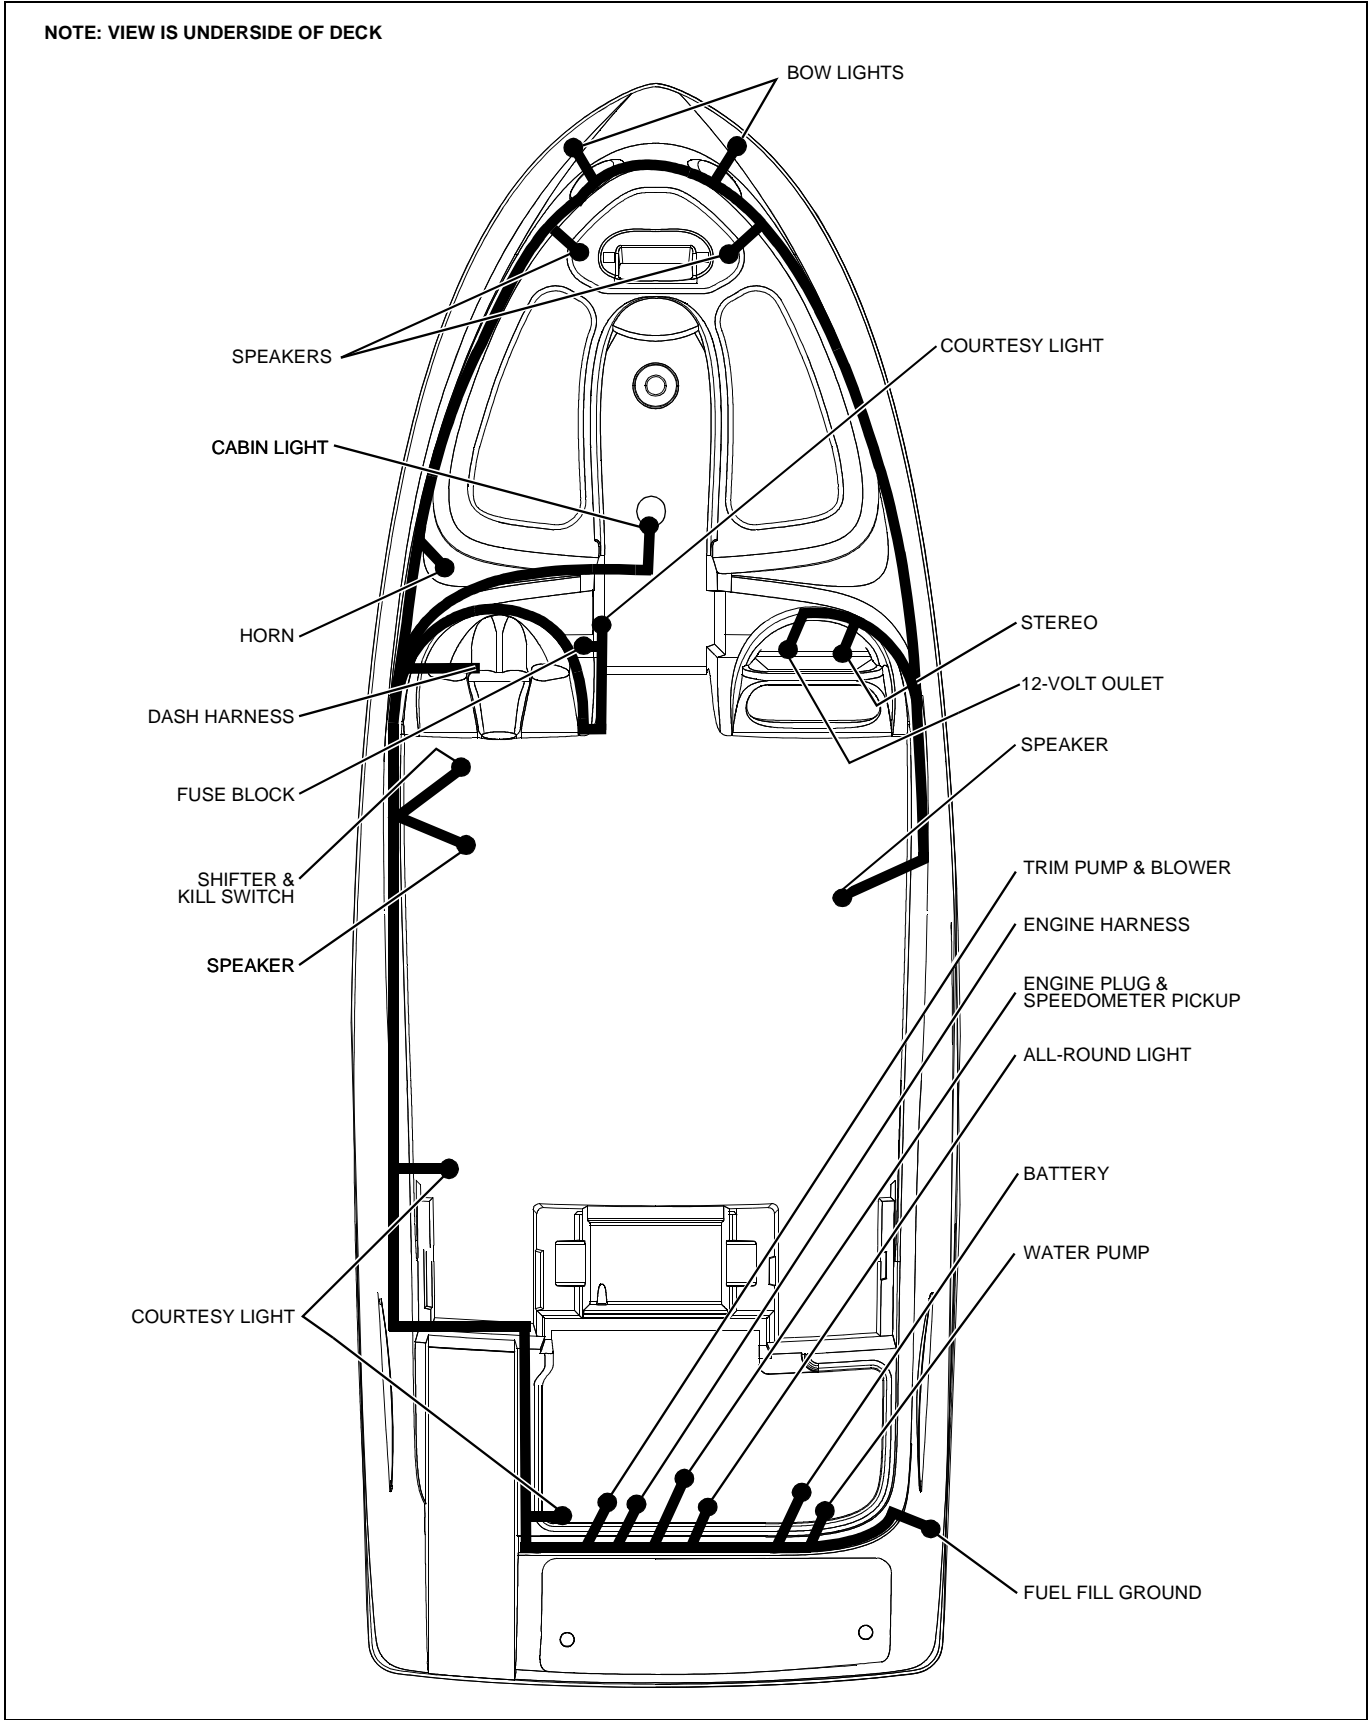


Wiring Diagrams


1800MX

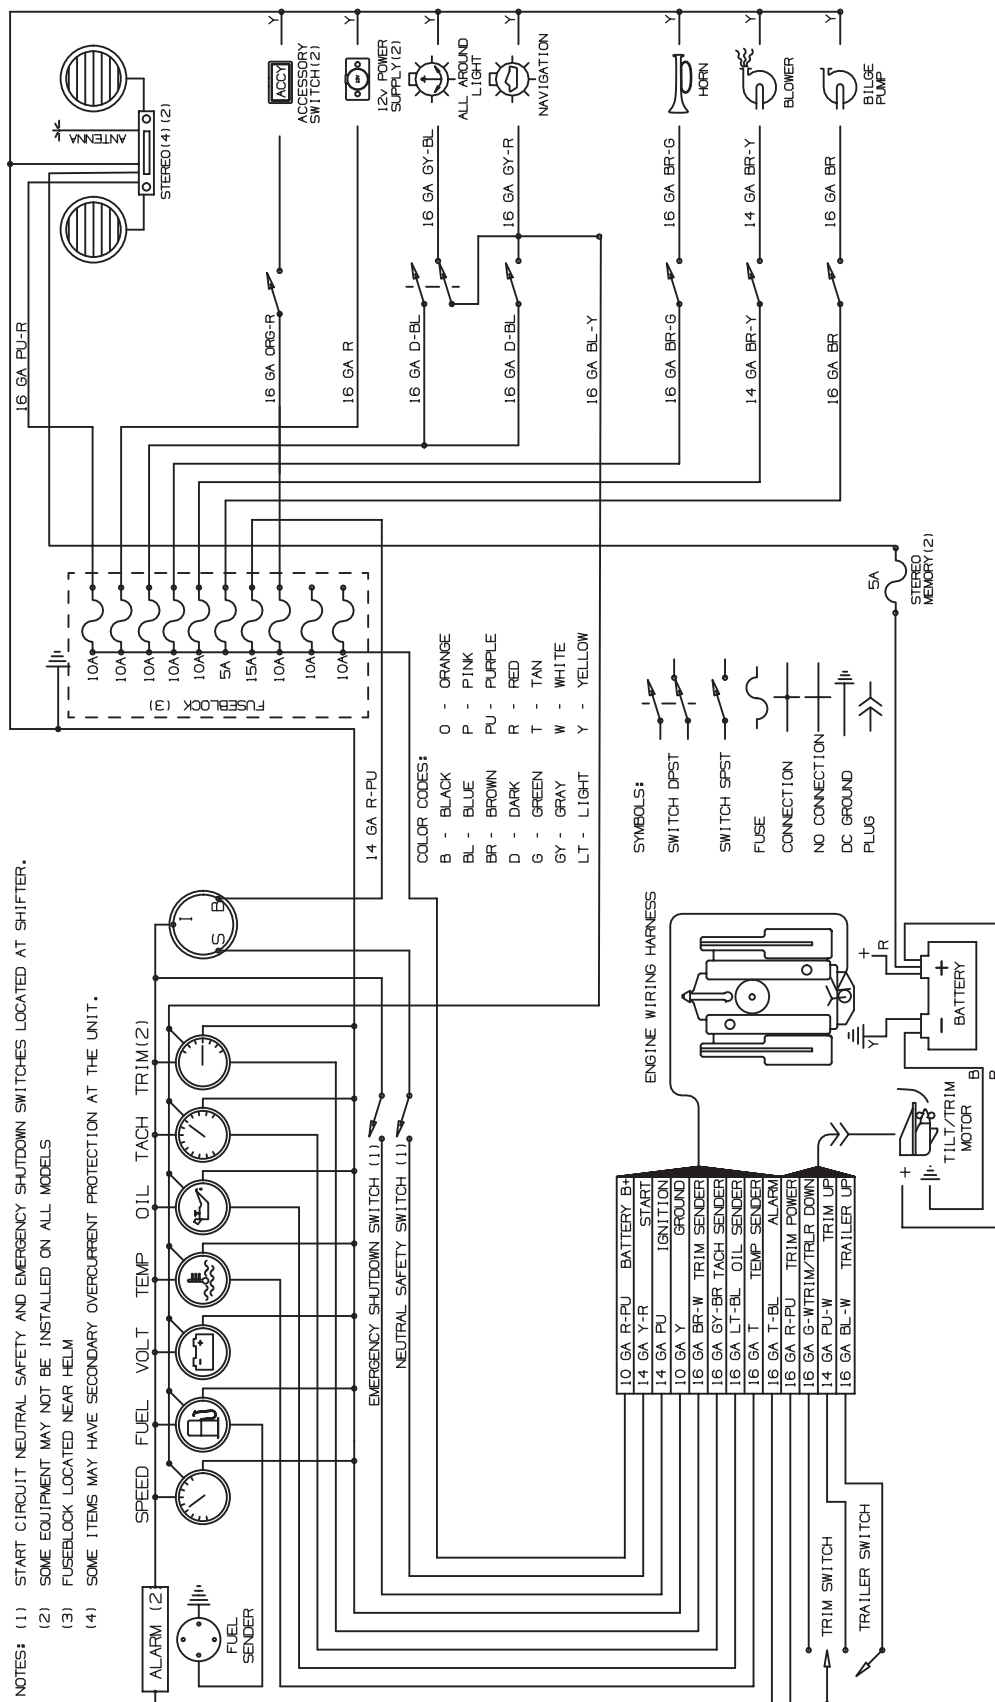


1800SR3, 1900SR3, & 2000SR3

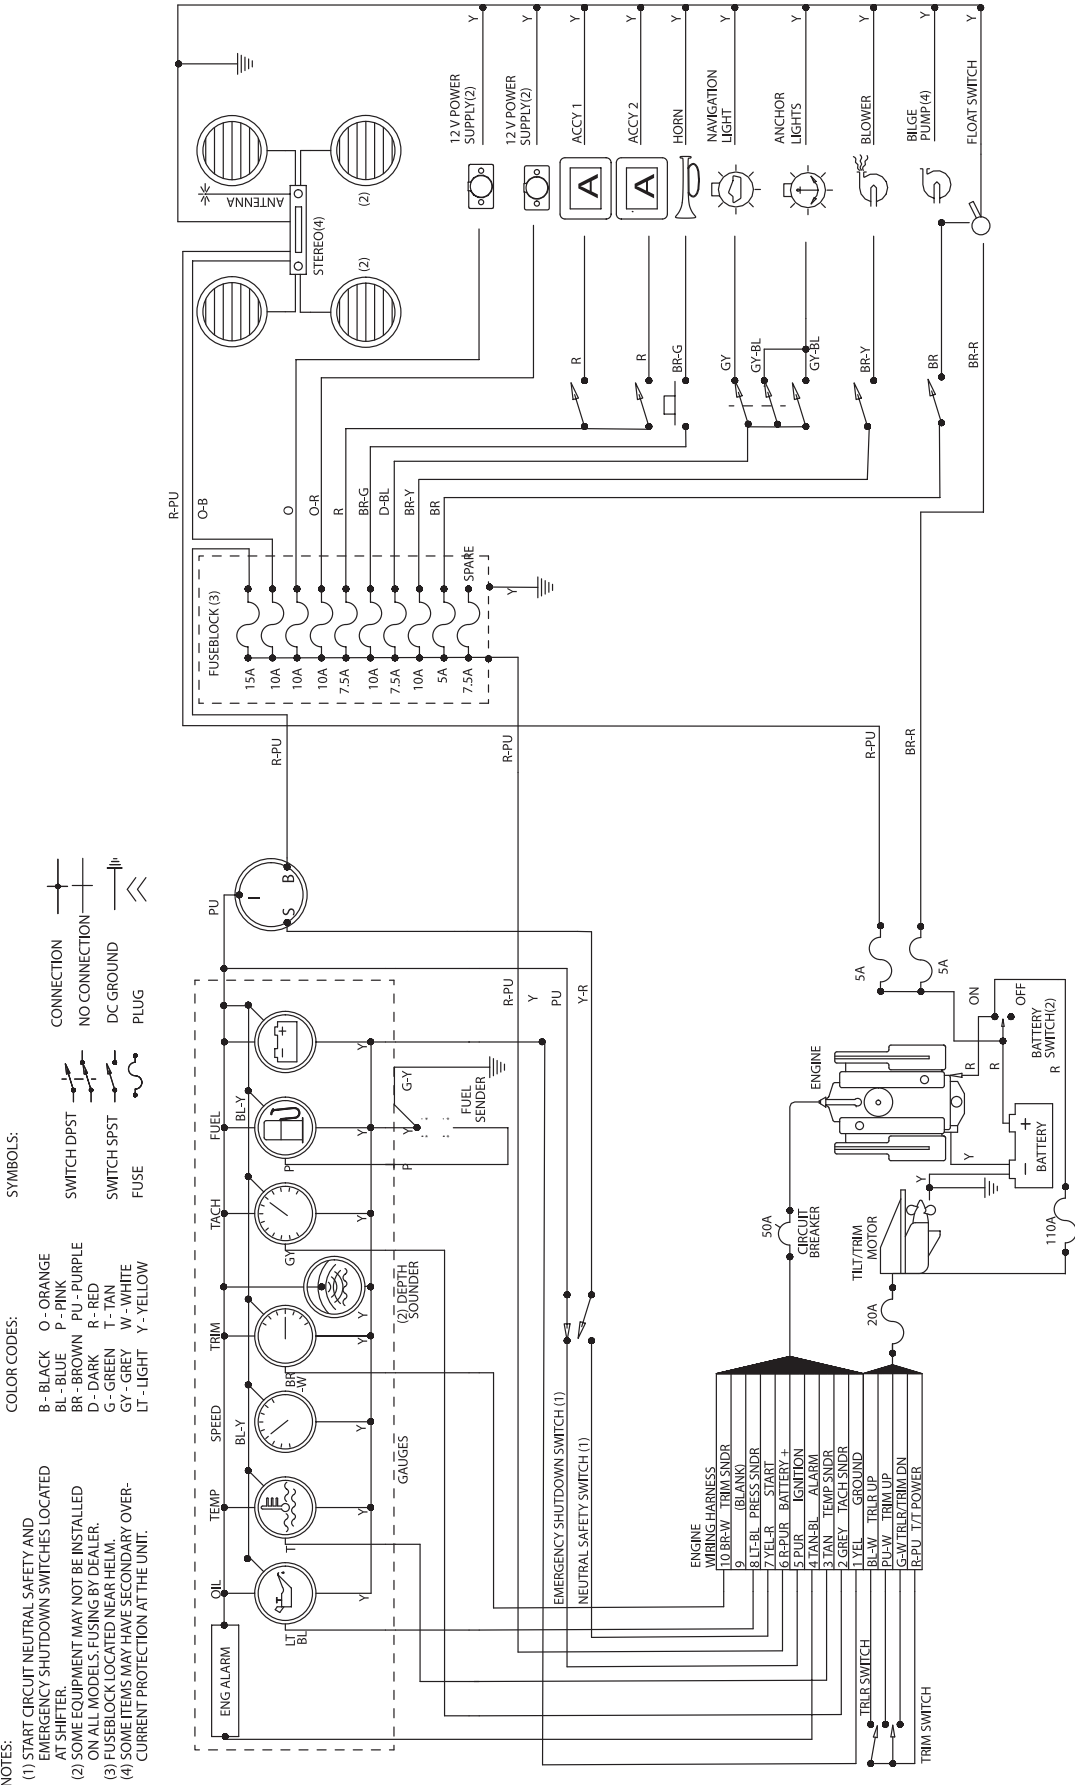

2100SC

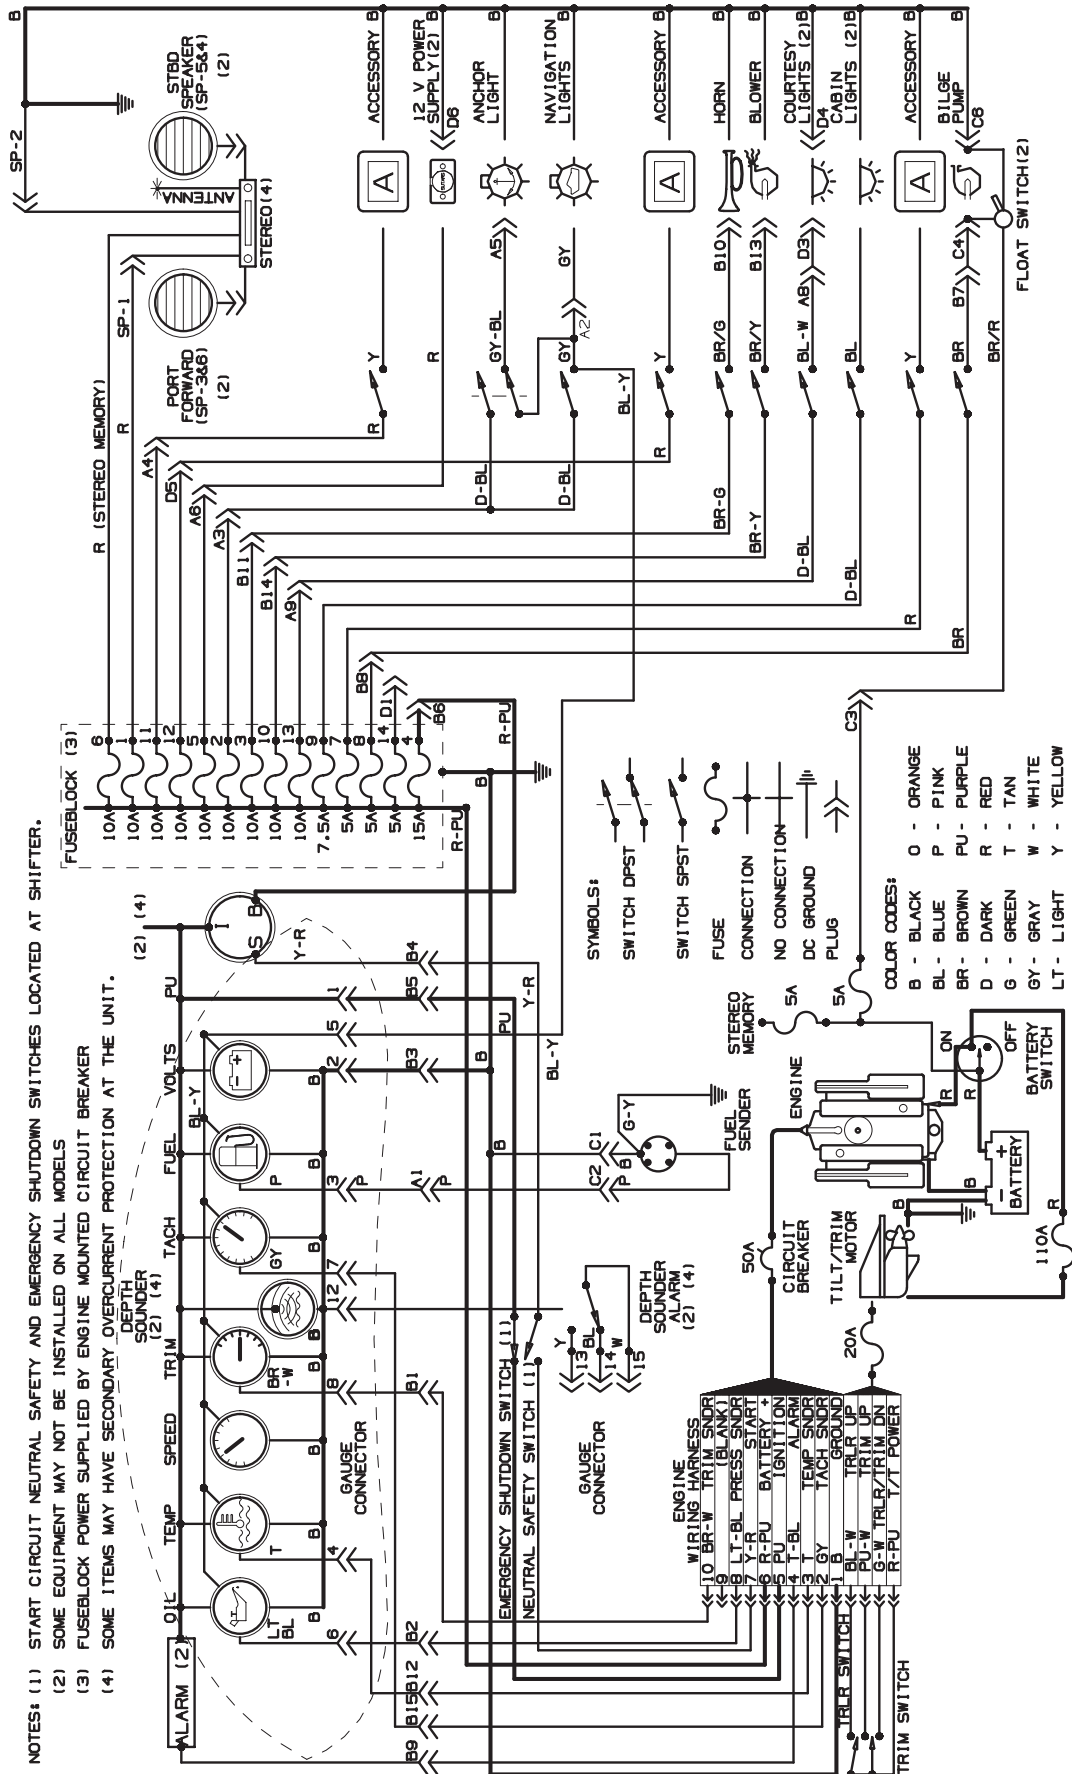

2200SR3

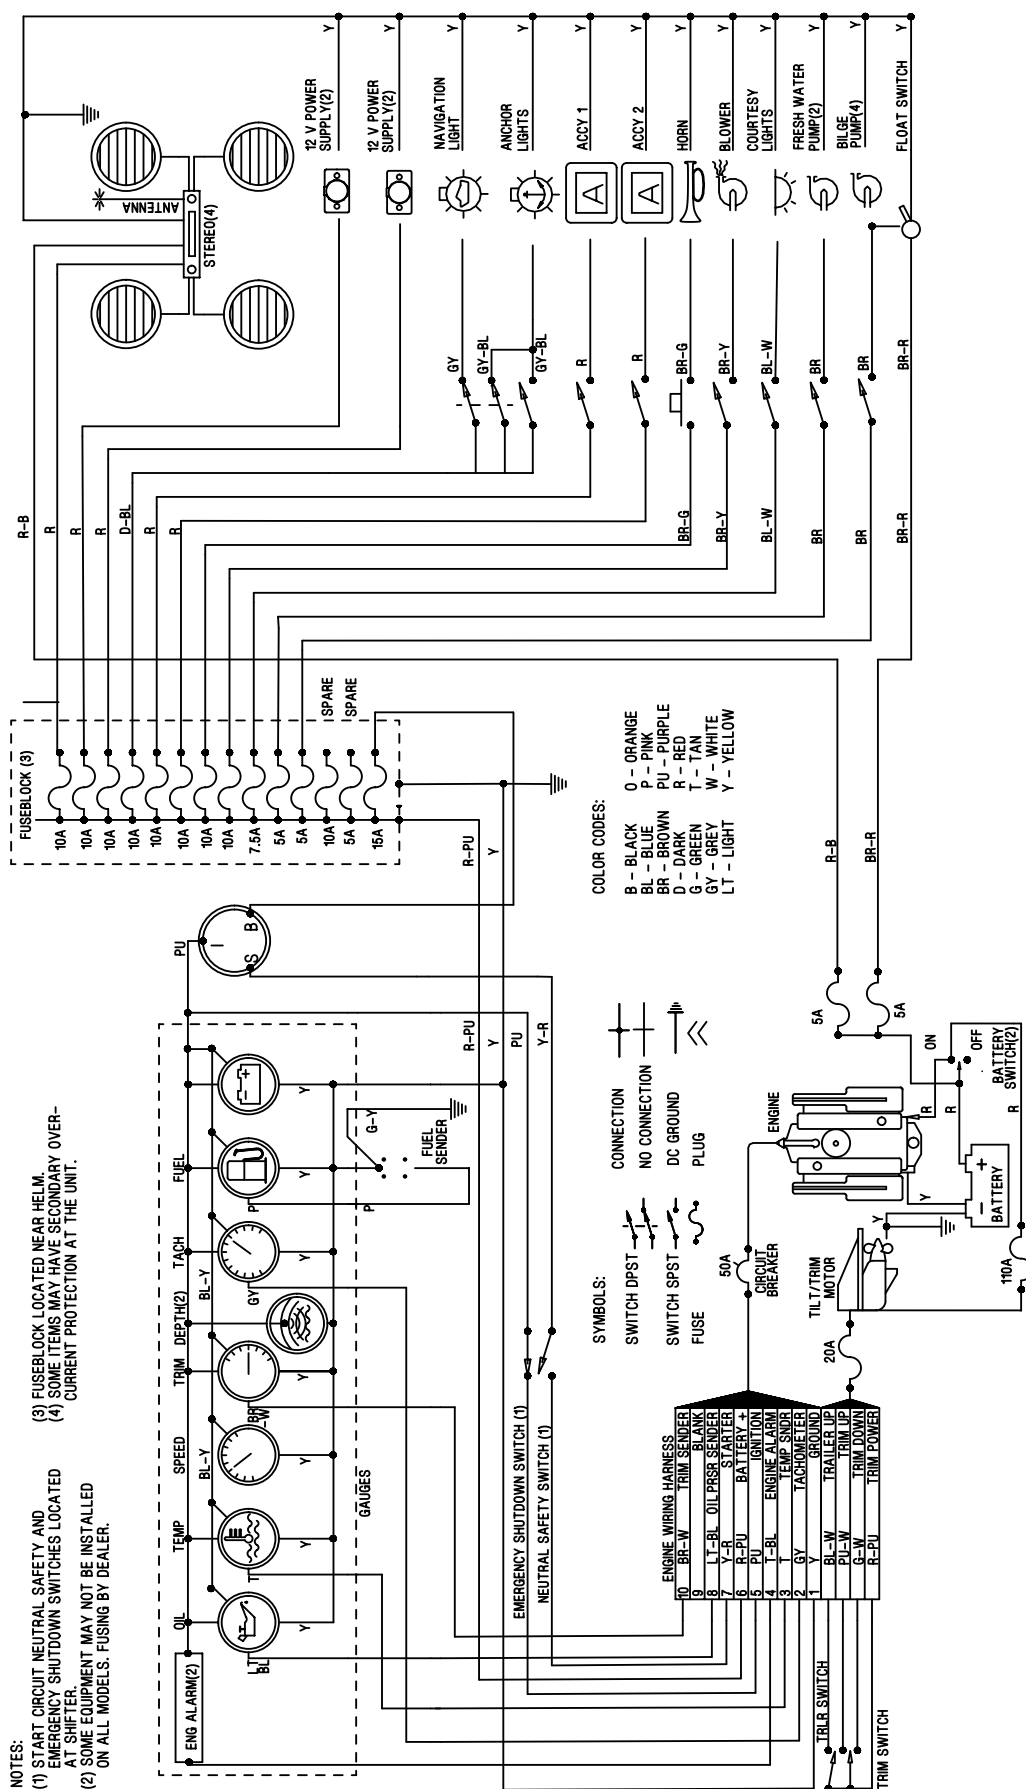

Important Records

Selling Dealer

Name Of Dealership

Address

Phone/FAX/E-mail

Sales Manager

Service Manager

Engine

Manufacturer

Model Name/Number

Engine Serial Number

Oil Type/SAE

Quarts per Engine

Filter Type

Propeller

Manufacturer

Pitch

Model Number

Key Numbers

Ignition

Other

Electronics

Manufacturer

Model Name/Number

Serial Number

Manufacturer

Model Name/Number

Serial Number

Manufacturer

Model Name/Number

Serial Number

Float Plan

Before going boating, fill out a copy of this float plan (or similar) and leave it with a **reliable** person whom you can depend on to contact the Coast Guard or other rescue organization, if you do not return as scheduled.

Description of Boat

Registration/Documentation Number		
Length	Make	Type
Hull Color		Trim Color
Fuel Capacity	Engine Type	Number of Engines
Distinguishing Features		
Distinguishing Features		

Operator of Boat

Full Name		
Male or Female	Age	Health
Address		
Address		
Phone/FAX/E-mail		
Operator's Experience		

Persons on Board

Full Name		
Age	Health	Phone Number
Full Name		
Age	Health	Phone Number
Full Name		
Age	Health	Phone Number
Full Name		
Age	Health	Phone Number
Full Name		
Age	Health	Phone Number

Survival Equipment

Marine Radio (Yes/No)	Type	Frequencies
Number of PFDs	Flares (Yes/No)	Mirror (yes or no)
Smoke Signals (Yes/No)	Flashlight (Yes/No)	Food (Yes/No)
Water (Yes/No)	Anchor (Yes/No)	Raft/Dinghy (Yes/No)
Paddles (Yes/No)	EPIRB (Yes/No)	Other
Other	Other	Other

Vehicle Description

Make	Model
Color	License Number
Where is the Vehicle Parked?	

Trip Expectations

Departing From	
Departure Date	Departure Time
Stopover 1	
Arrive No Later Than: Date	Arrive No Later Than: Time
Stopover 2	
Arrive No Later Than: Date	Arrive No Later Than: Time
Stopover 3	
Arrive No Later Than: Date	Arrive No Later Than: Time
Stopover 4	
Arrive No Later Than: Date	Arrive No Later Than: Time
Stopover 5	
Arrive No Later Than: Date	Arrive No Later Than: Time
Stopover 6	
Arrive No Later Than: Date	Arrive No Later Than: Time
Final Destination Port (If Different Than Home Port)	
Arrive No Later Than: Date	Arrive No Later Than: Time

If not returned by the date and time listed above, call the Coast Guard or other local authority.

Coast Guard Phone Number
Local Authority Phone Number

This image shows a blank sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

[illegible]

This image shows a full page of blank, lined paper. It features approximately 20 evenly spaced horizontal blue or grey lines across the entire width of the page, typical of notebook paper. There are no margins, text, or other markings present.

Part Number 1789377